



WET TANTALUM CAPACITORS

THE ULTIMATE RELIABILITY AND PERFORMANCE CHOICE FOR EXTREME APPLICATIONS

IN A NUTSHELL



KEY FACTORS




Capacitance
Performance
Energy
Temperature


QUALIFICATIONS

- M39006/09/21/22/25/30/31/33
- DLA 06013/06014/06015/06016
- DLA 04003/10004/10011/13017/15008/93026
- CECC 30202/001/002/004/005/801


LEAD CONFIGURATIONS



Axial





Radial



SMD

TERMINATION OPTIONS Tin / Lead
Lead (Pb)-free (100 % tin)
RoHS-compliant

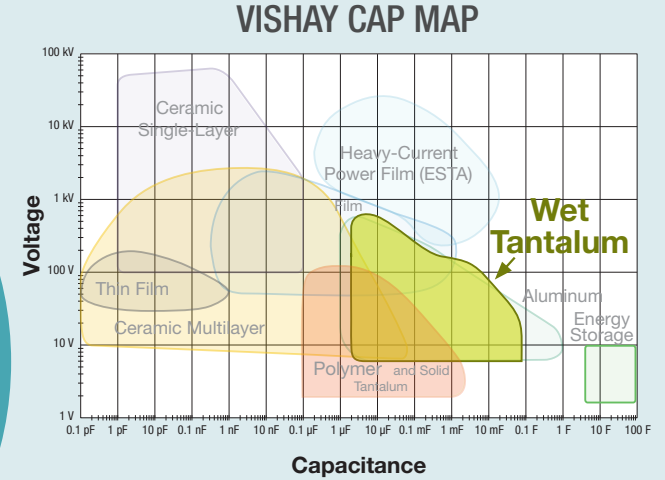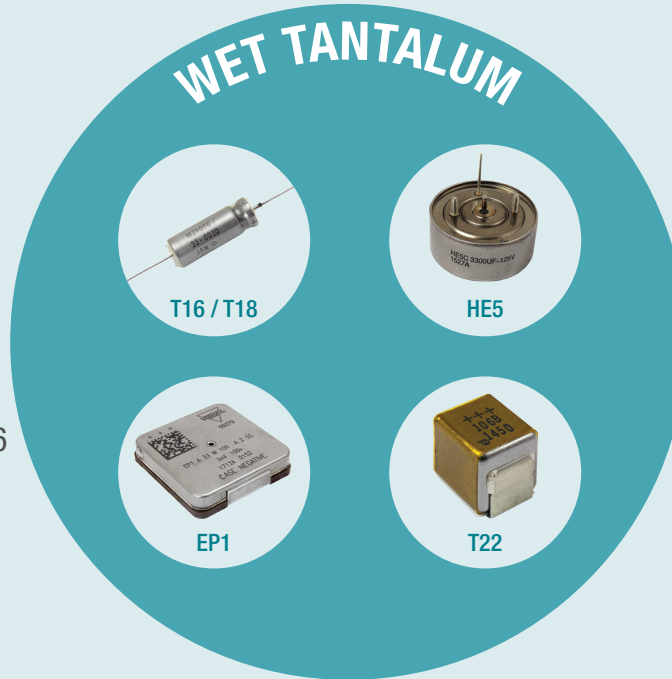


APPLICATIONS



AVIONICS




OIL and GAS



SPACE

VISHAY CAPABILITY

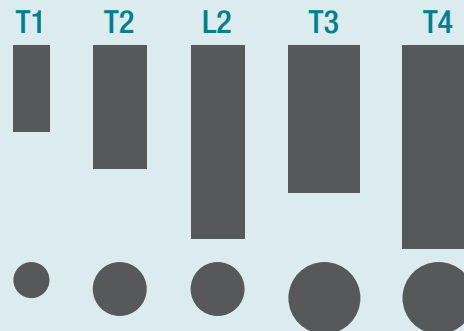

FOOTPRINT + PROFILE



Shown at actual size (when viewed or printed at 100 %)