CHD 14

Aluminum alloy housing
Contacts: copper alloy, silver plating

Specifications

Current rate (95mm² shield cable):	350A@ ambient temperature 70°C
Current rate (120mm² shield cable):	430A@ ambient temperature 70°C
Current rate (150mm² shield cable):	500A@ ambient temperature 70°C
Rating voltage:	1500V DC
Operating temperature:	-40 to 125°C
Salt spray:	500h Min

Durability:	50 cycles Min
Shielding:	Yes
Waterproof (mated):	IP67, IP6K9K
(unmated sockets):	IP67
Touch-proof:	IP2XB
Ambient temperature:	-40 to 70°C

Plug

CHD	14	06	1	X	X	XX

A: coding A
B: coding B
C: coding C
D: coding D
E: coding E
0: without HVIL
1: with HVIL
01: 150mm²
02: 120mm²
03: 95mm²



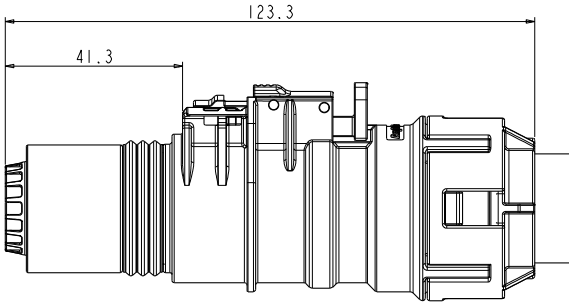

Receptacles

CHD	14	03	1	X	X	01

A: coding A
B: coding B
C: coding C
D: coding D
E: coding E
0: without HVIL
1: with HVIL





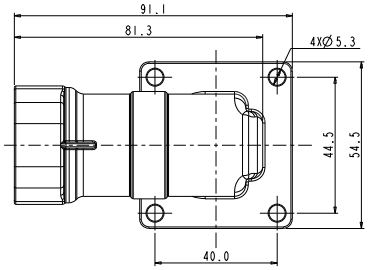

CHD	14	02	1	X	X	01

A: coding A
B: coding B
C: coding C
D: coding D
E: coding E
0: without HVIL
1: with HVIL





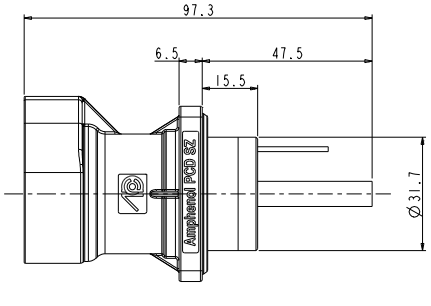

比例 1:1