


# Amphenol LTW M12 Shielded Receptacle With Wires

## For Your EMC Protection

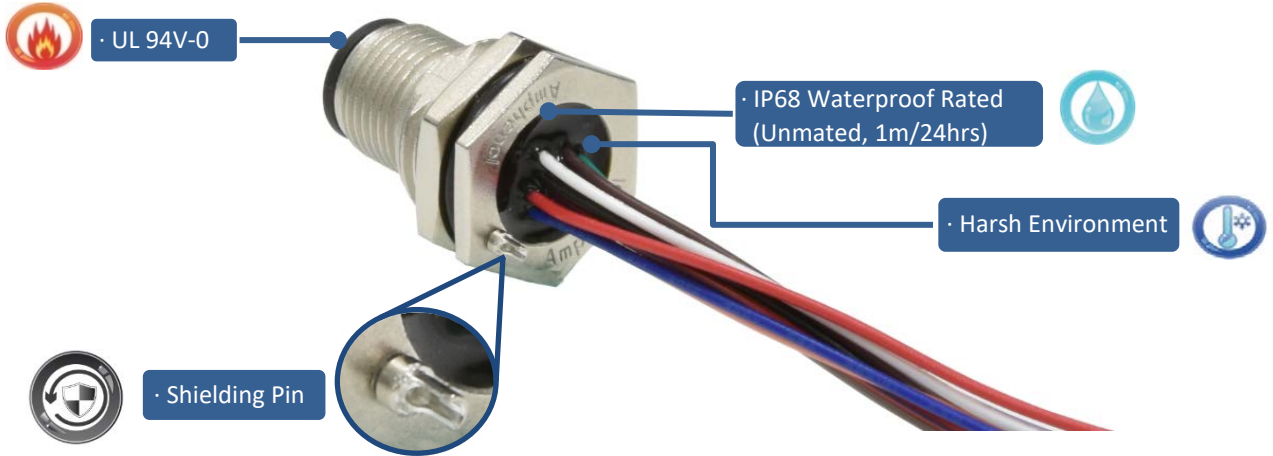

Coding	A-coded							B-coded			D-coded		
Contacts	3	4	5	6	8	10	12	3	4	5	3	4	5
Current Rating	4A			2A			1.5A	4A			4A		
Contact Configuration													

● Upon Request

### Application:



Broadband Wireless Access



Industrial Automation



Surveillance Systems



MRT / Railway

### Specification:

#### General Characteristics

Connector Type	Male / Female	Waterproof Rating	IP68 Unmated (1M / 24Hrs)
Backshell	Front Fasten	Wire Size AWG	22 AWG ~ 24 AWG
Locking Mechanism	Screw Type	Wire Style	UL 1061
Coding	A, B and D-Coded	Mechanical Operation	100 Cycles Min.
Temperature Range	-40°C ~ 105°C		

