



## PSG4 · PSF4 ■ Chip Type Power Shunt

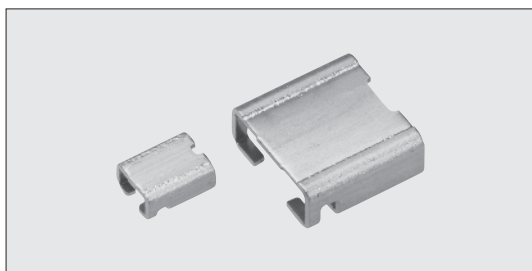

### ■ Construction

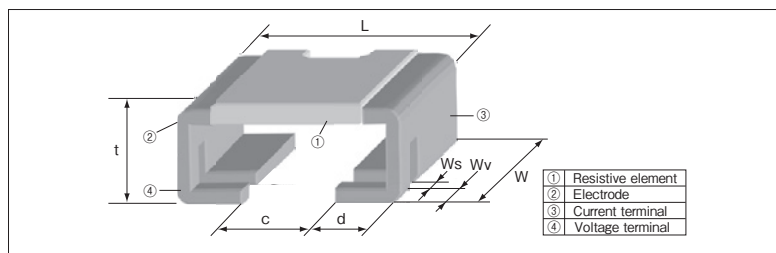

### ■ Features

- Correcter electric current detection is possible to 4-terminal Construction.
- Excellent T.C.R. achieved ( $\pm 50 \times 10^{-6}/K$ )
- Ultra low resistance, suitable for large current sensing.
- Automatic mounting machines are applicable.
- Suitable for reflow soldering. (Not suitable for flow soldering.)
- Products meet EU-RoHS requirements.
- AEC-Q200 qualified.

### ■ Applications

- Current sensing for module of Automobiles, Inverter power supplies etc.

### ■ Reference Standards

IEC 60115-1  
JIS C 5201-1

### ■ Dimensions

Type (Inch Size Code)	Resistance ( $\Omega$ )	Dimensions (mm)							Weight (g) (1000pcs)
		L	W	d	c	Ws	Wv	t	
PSG4 (2725)	0.5m	6.9 $\pm$ 0.25	6.6 $\pm$ 0.25	2.0 $\pm$ 0.1	—	1.0 $\pm$ 0.1	0.7 $\pm$ 0.1	3.05 $\pm$ 0.2	335
	1m							2.8 $\pm$ 0.2	242
PSF4 (1216)	0.5m	3.0 $\pm$ 0.1	3.8 $\pm$ 0.1	—	0.95 $\pm$ 0.15	0.7 $\pm$ 0.05	0.5 $\pm$ 0.05	1.8 $\pm$ 0.1	70
	1m								45

### ■ Type Designation

Example

PS	G	4	N	TEB	L500	F
Product Code	Style & Power Rating	Terminal Number	Terminal Surface Material	Taping	Nominal Resistance	Resistance Tolerance
	G(0.5m):10W G(1m):8W F(0.5m):5W F(1m):3W		N: No surface treatment	TEB: plastic embossed BK: Bulk	4 digits L500: 0.5m $\Omega$ 1L00: 1m $\Omega$	F: $\pm 1\%$


Contact us when you have control request for environmental hazardous material other than the substance specified by EU-RoHS.

For further information on taping, please refer to APPENDIX C on the back pages.

### ■ Ratings

Type	Power Rating (Current Rating)	T.C.R. ( $\times 10^{-6}/K$ )	Resistance Range ( $\Omega$ )	Resistance Tolerance	Rated Terminal Part Temp.	Operating Temp. Range	Taping & Q'ty/Reel(pcs)
							TEB
PSG4	10W(141A)	$\pm 50$	0.5m	F: $\pm 1\%$	75 $^{\circ}$ C	-65 $\sim$ +175 $^{\circ}$ C	1,500
	8W(89A)		1m				
PSF4	5W(100A)	$\pm 50$	0.5m	F: $\pm 1\%$	130 $^{\circ}$ C	-65 $\sim$ +175 $^{\circ}$ C	3,000
	3W(54A)		1m				


### ■ Recommended Pad Dimensions

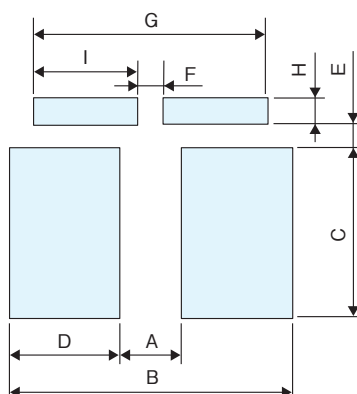

Type (Inch Size Code)	Dimensions (mm)								
	A	B	C	D	E	F	G	H	I
PSG4(2725)	2.0	9.4	5.6	3.7	0.8	0.8	7.8	0.9	3.5
PSF4(1216)	0.6	3.6	2.95	1.5	0.5	0.6	3.6	0.7	1.5

※These pad dimensions are only for standard pattern and the characteristics are not guaranteed, which you are suggested to confirm before use.

## Derating Curve


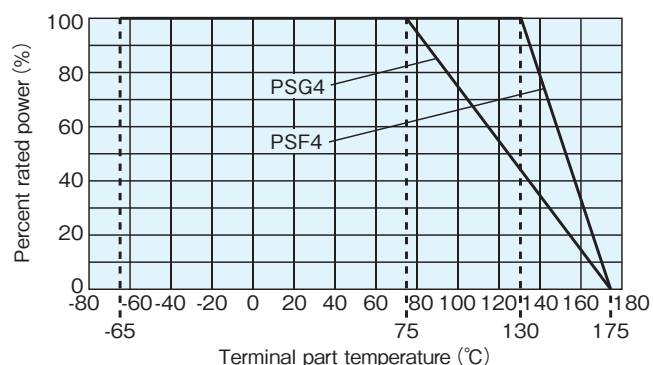


## One-Pulse Limiting Electric Power

※The maximum applicable voltage is equal to the max. overload voltage.

Please ask us about the resistance characteristic of continuous applied pulse.

The pulse endurance values are not assured values,so be sure to check the products on actual equipment when you use them.

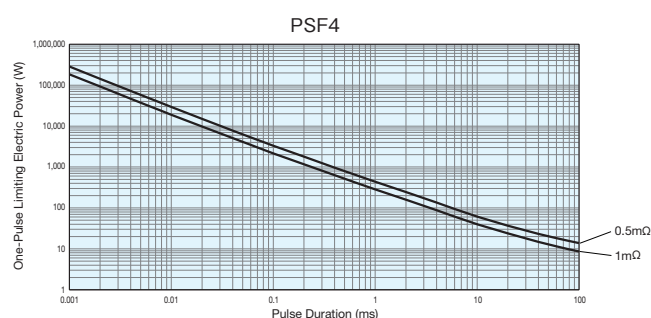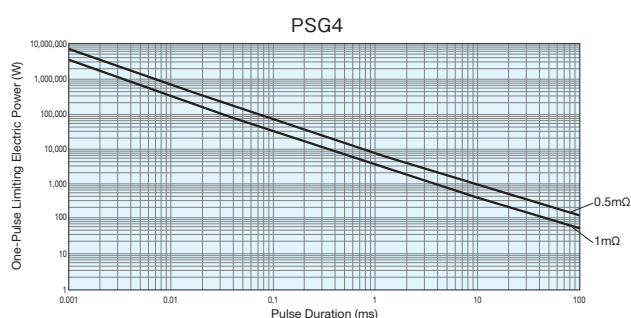


## Thermal Resistance

Type	Resistance (Ω)	Rth (°C/W)
PSG4	0.5m	9
	1m	12
PSF4	0.5m	8
	1m	14

$$R_{th} = (H_s - t_s) / \text{Power}$$

Regarding the temperature rise, the value of the temperature varies per conditions and board for use since the temperature is measured under our measuring conditions. Please refer to us before use.

The temperature of the resistor will increase the same  $\Delta T$  from the standard terminal part temperature regardless of the ambient temperature when the same power is applied. This is because there is hardly any heat dissipation from the resistor surface to the ambient air.

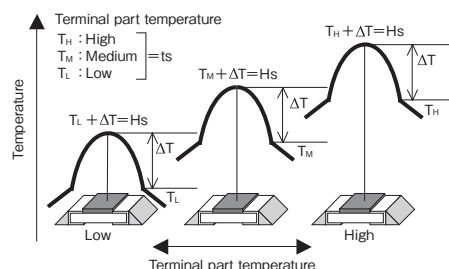

## Performance

Test Items	Performance Requirements $\Delta R \pm \%$		Test Methods
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R	Within specified T.C.R	—	+25°C/+125°C
Overload (Short time)	0.5	0.1	PSG4(0.5mΩ) : 30W for 5s. PSG4(1mΩ) : 20W for 5s. PSF4(0.5mΩ) : 15W for 5s. PSF4(1mΩ) : 9W for 5s.
Resistance to soldering heat	0.5	0.1	260°C±5°C, 15s±1s
Rapid change of temperature	0.5	0.1	−55°C (30min.) / +150°C (30min.) 1000 cycles
Moisture resistance	0.5	0.05	85°C±3°C, 85%±3%RH, 1000h, 10% Bias
Endurance of rated terminal part temperature	1.0	0.5	PSG4 : Terminal part temp. : 75°C±3°C, 1000h, 1.5h ON/0.5h OFF cycle PSF4 : Terminal part temp. : 130°C±3°C, 1000h, 1.5h ON/0.5h OFF cycle
Low temperature exposure	0.5	0.01	−65°C, 1000h
High temperature exposure	1.0	0.6	+175°C, 1000h

## Precautions for Use

- In case of using the low ohm resistors as shunt resistors, please lay out a pattern considering the electromagnetic induction with surrounding inductors.