


FiT Family Products

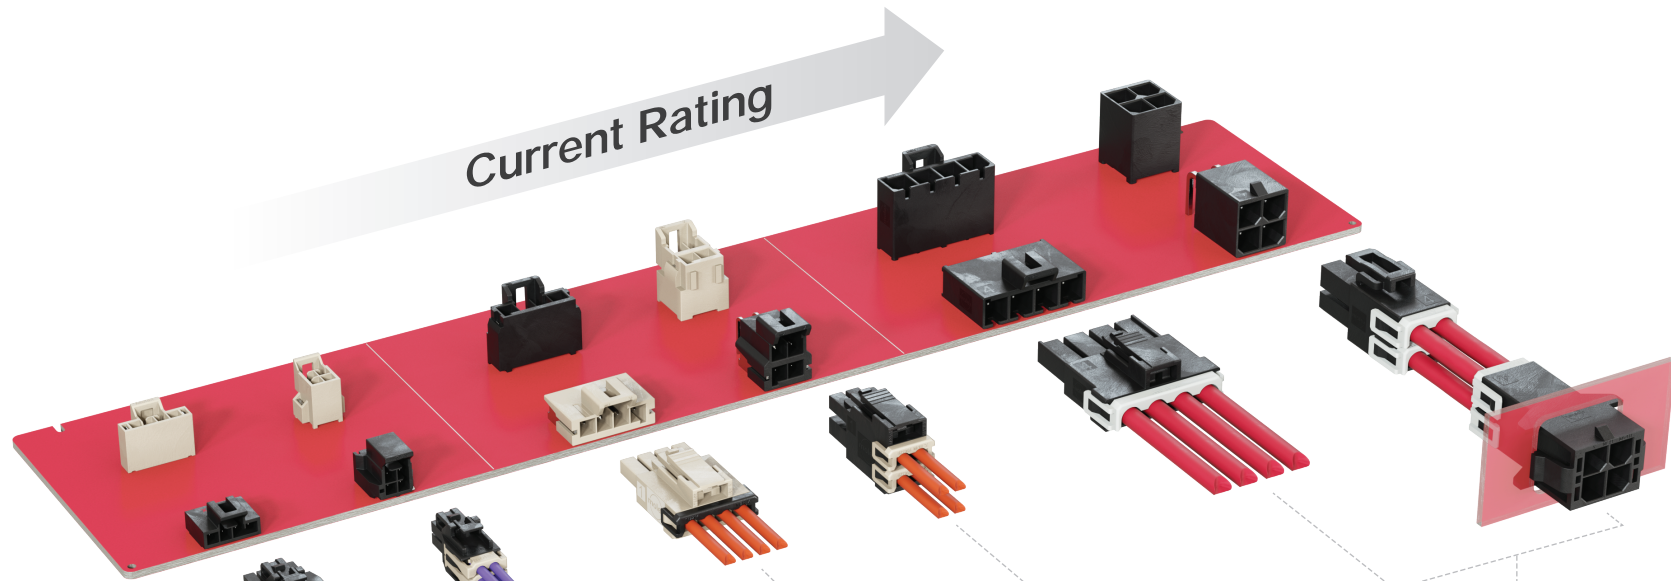

Nano-FiT

Pitch: 2.50mm
Current Rating: 8.0A
Voltage (max): 250V
PCB Termination: Through Hole, SMT
Available Configurations:
Wire-to-Board, Wire-to-Wire
Circuit Size:
Single Row: 2-8
Dual Row: 4-16
Wire Gauge (AWG): 20-26
Glow Wire Capable
TPA Capable


Ultra-FiT

Pitch: 3.50mm
Current Rating: 14.0A
Voltage (max): 600V
PCB Termination: Through Hole
Available Configurations:
Wire-to-Board
Circuit Size:
Single Row: 2-8
Dual Row: 4-16
Wire Gauge (AWG): 16-22
Glow Wire Capable
TPA Capable

Mega-FiT

Pitch: 5.70mm
Current Rating: 25.0A
Voltage (max): 600V
PCB Termination: Through Hole
Available Configurations:
Wire-to-Board, Wire-to-Wire
Circuit Size:
Single Row: 2-8
Dual Row: 4-16
Wire Gauge (AWG): 12-16
Glow Wire Capable
TPA Capable

FiT Family Products

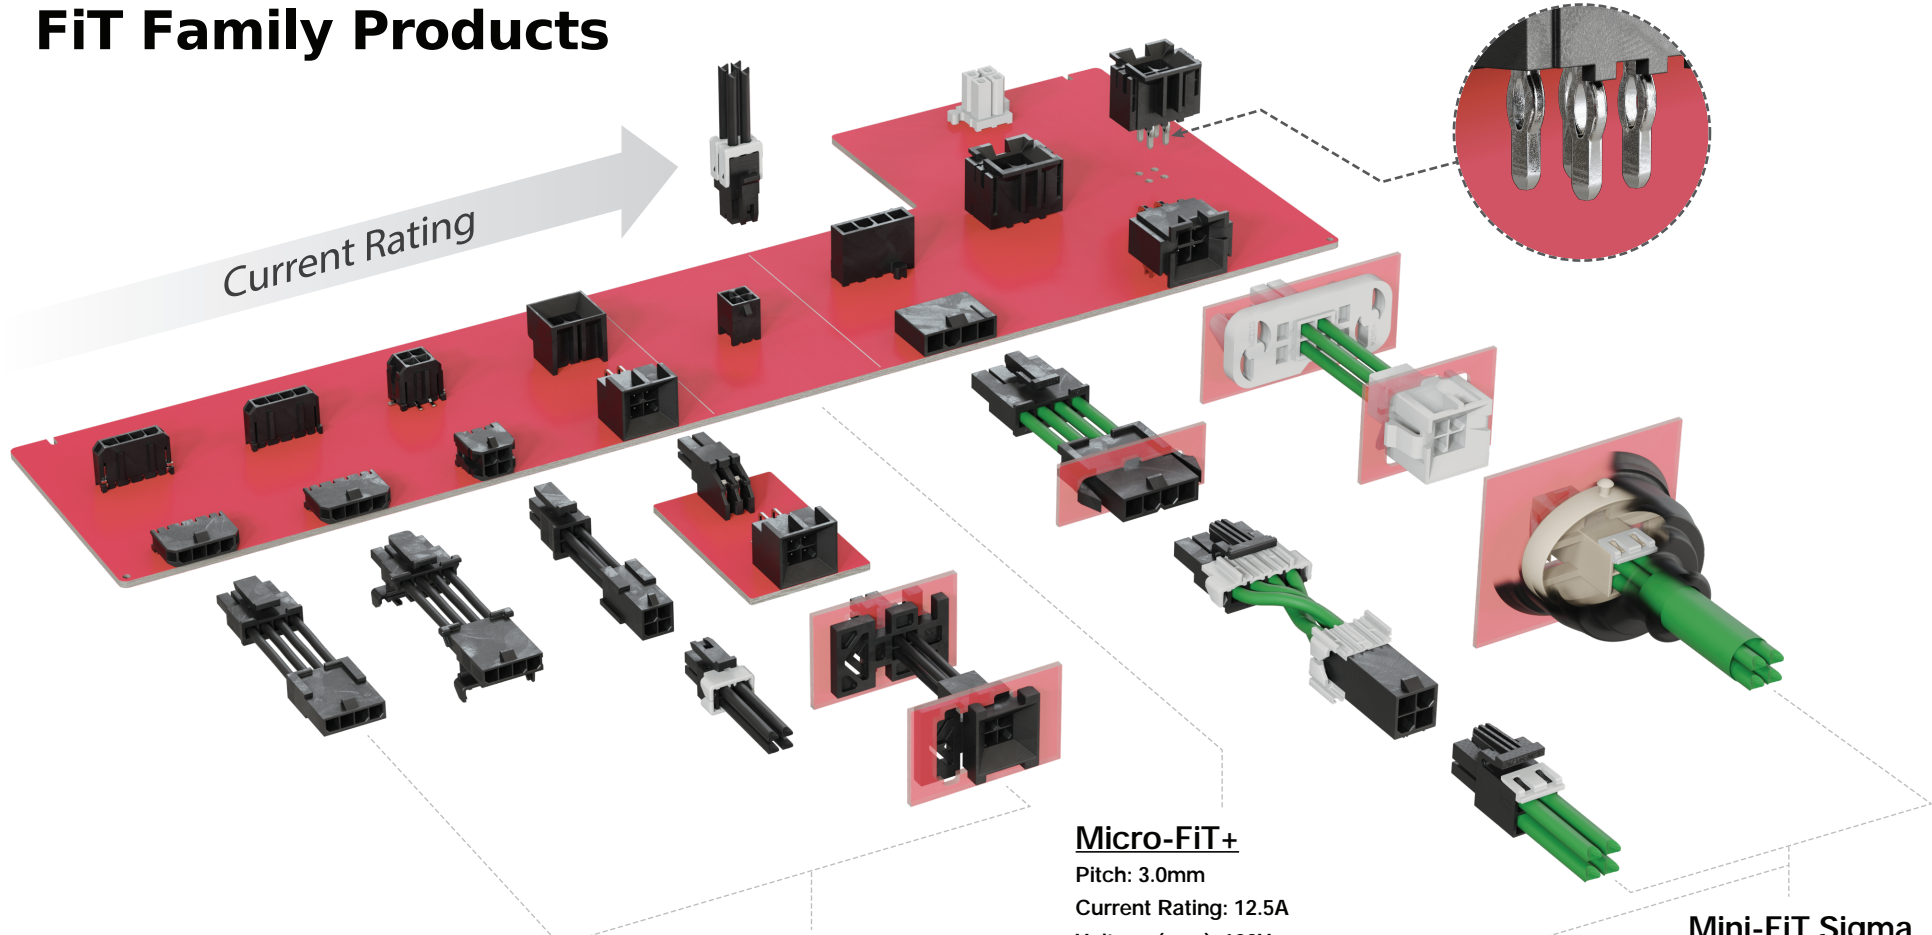

Micro-FiT

Pitch: 3.0mm
 Current Rating: 10.5A
 Voltage (max): 600V
 PCB Termination: Through Hole, SMT, Compliant-Pin Through Hole
 Available Configurations: Board-to-Board, Wire-to-Board, Wire-to-Wire
 Circuit Size: Single Row: 2-12, Dual Row: 2-24
 Wire Gauge (AWG): 18-30
 Glow Wire Capable, TPA Capable, Blind-Mate Capable

Micro-FiT+

Pitch: 3.0mm
 Current Rating: 12.5A
 Voltage (max): 600V
 PCB Termination: Through Hole
 Available Configurations: Wire-to-Board
 Circuit Size: Dual Row: 2-24
 Wire Gauge (AWG): 16-30
 Glow Wire Capable, TPA Capable

Mini-FiT

Pitch: 4.20mm
 Current Rating: 13.0A
 Voltage (max): 600V
 PCB Termination: Through Hole, Compliant Pin Through Hole
 Available Configurations: Board-to-Board, Wire-to-Board, Wire-to-Wire
 Circuit Size: Single Row: 2-8, Dual Row: 2-36
 Wire Gauge (AWG): 16-28
 Glow Wire Capable, TPA Capable,

Mini-FiT Sigma

Pitch: 4.20mm
 Current Rating: 11.5A
 Voltage (max): 600V
 PCB Termination: Through Hole
 Available Configurations: Wire-to-Board, Wire-to-Wire
 Circuit Size: Single Row: 2-8, Dual Row: 4-16
 Wire Gauge (AWG): 16-24
 Glow Wire Capable