





### Standard Surface-Mounting Slide DIP Switches

- Gold-plated twin contacts ensure high reliability.
- Washable, with seal tape available.
- Models with from 1 to 10 poles meet wide needs.
- Embossed taping available for small-reel 100 pcs/500 pcs.






### ■List of Models

#### Tube Packaging

		Type		Flat actuator		Raised actuator
		Standard	With seal tape	Standard	With seal tape	
No. of poles	Quantity per tube					
1	130	A6S-1101-H	A6S-1102-H	A6S-1104-H		
2	76	A6S-2101-H	A6S-2102-H	A6S-2104-H		
3	55	A6S-3101-H	A6S-3102-H	A6S-3104-H		
4	42	A6S-4101-H	A6S-4102-H	A6S-4104-H		
5	35	A6S-5101-H	A6S-5102-H	A6S-5104-H		
6	28	A6S-6101-H	A6S-6102-H	A6S-6104-H		
7	25	A6S-7101-H	A6S-7102-H	A6S-7104-H		
8	22	A6S-8101-H	A6S-8102-H	A6S-8104-H		
9	20	A6S-9101-H	A6S-9102-H	A6S-9104-H		
10	18	A6S-0101-H	A6S-0102-H	A6S-0104-H		

**Note:** Order in multiples of the package quantity.




## Embossed Taping (Standard reel)

Type		Flat actuator		Raised actuator	
		Standard	With seal tape		
No. of poles	Quantity per reel			Quantity per reel	
1	800	A6S-1101-PH	A6S-1102-PH	800	A6S-1104-PH
2		A6S-2101-PH	A6S-2102-PH	700	A6S-2104-PH
3		A6S-3101-PH	A6S-3102-PH	700	A6S-3104-PH
4		A6S-4101-PH	A6S-4102-PH	700	A6S-4104-PH
5		A6S-5101-PH	A6S-5102-PH	800	A6S-5104-PH
6		A6S-6101-PH	A6S-6102-PH	700	A6S-6104-PH
7		A6S-7101-PH	A6S-7102-PH	800	A6S-7104-PH
8		A6S-8101-PH	A6S-8102-PH	700	A6S-8104-PH
9		--- (See note 2.)	A6S-9102-PH	700	A6S-9104-PH
10		--- (See note 2.)	A6S-0102-PH	700	A6S-0104-PH

Note: 1. Order in multiples of the package quantity.

2. Models with a different number of poles than those listed here can also be ordered. For details, consult your OMRON sales representative.




## Embossed Taping (Small reel)

Type		Flat actuator		Raised actuator
		Standard	With seal tape	
No. of poles	Quantity per reel			
2	400	--- (See note 2.)	A6S-2102-PMH	--- (See note 2.)
3		A6S-3101-PMH	--- (See note 2.)	--- (See note 2.)
4		A6S-4101-PMH	A6S-4102-PMH	A6S-4104-PMH
6		A6S-6101-PMH	A6S-6102-PMH	A6S-6104-PMH
8		A6S-8101-PMH	A6S-8102-PMH	A6S-8104-PMH
10		A6S-0101-PMH	A6S-0102-PMH	A6S-0104-PMH

Note: 1. Order in multiples of the package quantity.

2. Models with a different number of poles than those listed here can also be ordered. For details, consult your OMRON sales representative.

## Embossed Taping (100 pcs reel)

Type		Flat actuator		Raised actuator
		Standard	With seal tape	
No. of poles	Quantity per reel			
1	100	A6S-1101-H-R100	A6S-1102-H-R100	A6S-1104-H-R100
2		A6S-2101-H-R100	A6S-2102-H-R100	A6S-2104-H-R100
3		A6S-3101-H-R100	A6S-3102-H-R100	A6S-3104-H-R100
4		A6S-4101-H-R100	A6S-4102-H-R100	A6S-4104-H-R100
5		A6S-5101-H-R100	A6S-5102-H-R100	A6S-5104-H-R100
6		A6S-6101-H-R100	A6S-6102-H-R100	A6S-6104-H-R100
7		A6S-7101-H-R100	A6S-7102-H-R100	A6S-7104-H-R100
8		A6S-8101-H-R100	A6S-8102-H-R100	A6S-8104-H-R100
9		A6S-9101-H-R100	A6S-9102-H-R100	A6S-9104-H-R100
10		A6S-0101-H-R100	A6S-0102-H-R100	A6S-0104-H-R100

## Ratings/Characteristics

Rating (resistive load)	25 mA at 24 VDC 10 $\mu$ A (minimum current) at 3.5 VDC	
Ambient operating temperature	-20 to +70°C at 60% max. (with no icing or condensation)	
Ambient operating humidity	35% to 95% (at +5 to +35°C)	
Insulation resistance	100 M $\Omega$ min. (at 250 VDC with insulation tester)	
Contact resistance (initial value)	200 m $\Omega$ max.	
Dielectric strength	Between terminals	500 VAC for 1 min
Vibration resistance	Malfunction	10 to 55 Hz, 1.5-mm double amplitude

Shock resistance	Malfunction	300 m/s <sup>2</sup> min.
Durability	Electrical	1,000 operations min.
Washing		Standard models: Not possible, Models with seal tape: Possible, Models with raised actuators: Not possible
Degree of protection		IEC IP40
Operating force		0.29 to 9.8 N (30 to 1,000 gf)
Weight		0.25 g (2 poles) 0.41 g (4 poles) 0.58 g (6 poles) 0.73 g (8 poles) 0.87 g (10 poles)

**Dimensions** (Unit: mm)

● Flat Actuator



Standard

A6S-□101-H

A6S-□101-PH

A6S-□101-PMH

A6S-□101-H-R100

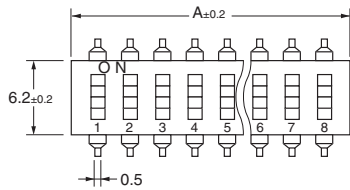



With Seal Tape

A6S-□102-H

A6S-□102-PH

A6S-□102-PMH

A6S-□102-H-R100

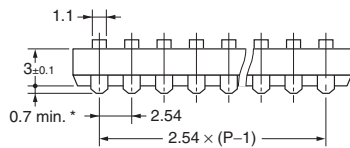

\* 1 pole type is 0 to 0.15 mm


● Raised Actuator

A6S-□104-H


A6S-□104-PH

A6S-□104-PMH


A6S-□104-H-R100




PCB Dimensions (Reference)  
(Top View)




Flat Actuator  
Standard



Flat Actuator  
With Seal Tape



Raised Actuator




No. of poles	Model			Dimension A
	Flat Actuator		Raised Actuator	
	Standard	With Seal Tape		
1	A6S-1101-H	A6S-1102-H	A6S-1104-H	3.48
2	A6S-2101-H	A6S-2102-H	A6S-2104-H	6.02
3	A6S-3101-H	A6S-3102-H	A6S-3104-H	8.56
4	A6S-4101-H	A6S-4102-H	A6S-4104-H	11.10
5	A6S-5101-H	A6S-5102-H	A6S-5104-H	13.64
6	A6S-6101-H	A6S-6102-H	A6S-6104-H	16.18
7	A6S-7101-H	A6S-7102-H	A6S-7104-H	18.72
8	A6S-8101-H	A6S-8102-H	A6S-8104-H	21.26
9	A6S-9101-H	A6S-9102-H	A6S-9104-H	23.80
10	A6S-0101-H	A6S-0102-H	A6S-0104-H	26.34

Note: Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

**Internal Connections**

Contact Form (Top View)



**Precautions**

Be sure to read the Safety precautions common to all DIP Switches for correct use.

Please check each region's Terms & Conditions by region website.

---

## OMRON Corporation

Device & Module Solutions Company

### Regional Contact

**Americas**

<https://components.omron.com/us>

**Asia-Pacific**

<https://components.omron.com/ap>

**Korea**

<https://components.omron.com/kr>

**Europe**

<https://components.omron.com/eu>

**China**

<https://components.omron.com.cn>

**Japan**

<https://components.omron.com/jp>