



Relay Products Shortform Catalog





TE Relay Products offers an extremely broad range of relays for application in many different markets. Appliance, Alternative Energy, Automotive, Building Equipment, Alternative Power Vehicle, and Power Metering are some of the key industries served.


13 9032
48 2909
kW/h 5.398
E 08632500

Index




Alternative Energy

General Purpose	Page
■ Low Power PCB Relays	10
■ Panel/Plug-In Relays	19
■ Power Relays	25
■ High Power PCB Relays	26
■ Solar Relays	26
■ Circuit Breakers	34

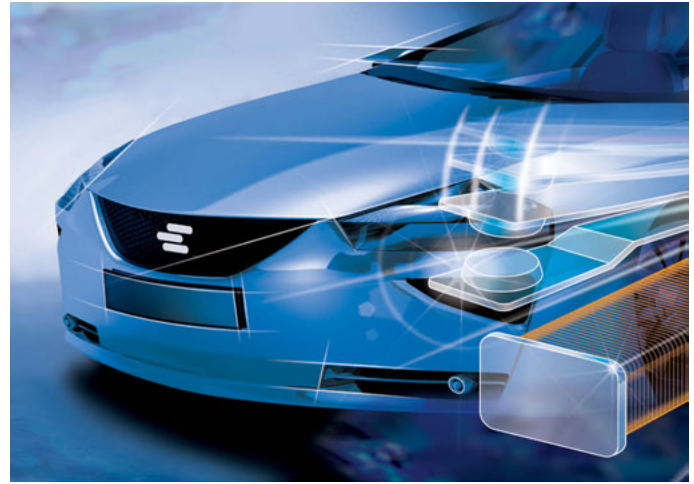


Automotive

Automotive	Page	Signal	Page
■ PCB Relays	4	■ Signal Relays	28
■ Plug-In Relays	5	■ High Frequency Relays/Switches	32
■ High Current Solutions	7		
■ Latching Solutions	8		

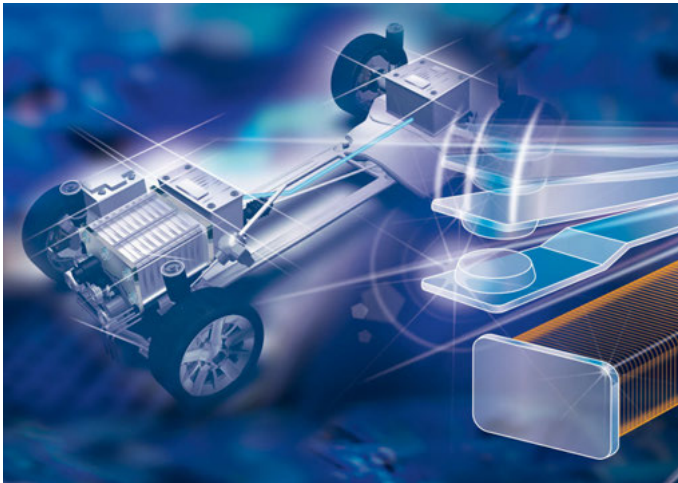

Alternative Power Vehicle/Charging

Alternative Power	Page	General Purpose	Page
■ Automotive Relays	4	■ Low Power PCB Relays	10
■ High Voltage Precharge Relays	9	■ High Power PCB Relays	26

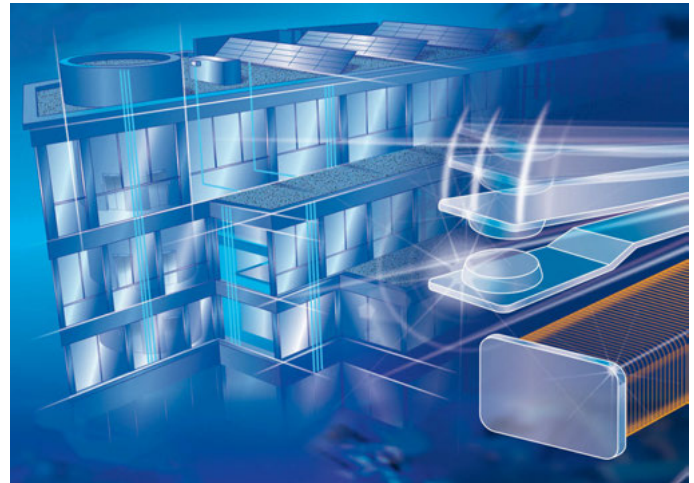

Building Equipment

General Purpose	Page	Signal	Page
■ Low Power PCB Relays	10	■ Signal Relays	28
■ Force Guided Relays	18		
■ Panel/Plug-In Relays	19		
■ High Power PCB Relays	26		
■ Metering, Solar Relays	26		
■ Circuit Breakers	34		

This shortform catalog provides a brief overview of key series available from TE Relay Products. For complete details on these and other products, view the complete datasheets at <http://relays.te.com>. Specifications and/or agency recognitions do not necessarily apply to all models within a particular series. Consult datasheets and/or footnotes as well as disclaimer on page 38-39 for details.

Index



Appliance

General Purpose	Page	Signal	Page
■ Low Power PCB Relays ...10		■ Signal Relays	28
■ High Power PCB Relays ...26			
■ Circuit Breakers	34		



Industrial

General Purpose	Page	Signal	Page
■ Low Power PCB Relays ... 10		■ Signal Relays	28
■ Force Guided Relays18		■ High Frequency Relays/Switches	32
■ Panel/Plug-In Relays ... 19			
■ High Power PCB Relays ...26			
■ Circuit Breakers	34		



Power Metering (ANSI¹⁾ Style)

General Purpose	Page
■ High Power PCB Relays	26
■ Metering Relays	26



Communication


General Purpose	Page	Signal	Page
■ Low Power PCB Relays ... 10		■ Signal Relays	28
■ Circuit Breakers	34	■ High Frequency Relays/Switches	32

1) ANSI is a trademark of American National Standards Institute.

PCB Relays


Power K (V23133/V23076)

- Limiting continuous current 45A (V23076/133)
- High current open version Power K-S (V23071): 70/50A at 23°/85°C, very low voltage drop¹⁾ available
- Wide voltage range
- 24VDC versions available



Mini K (V23072-A/C)

- Limiting continuous current 20A
- 24VDC versions with special contact gap
- Various contact arrangements and materials



DMR (V23084)

- Limiting continuous current 30A



Contact Data

Contact arrangement	1 form A/C, 1 NO/CO	1 form A, 1 NO	1 form C, 1 CO	1 form U, 2 NO	2 form C, 2 CO
Rated voltage	12, (24)VDC ⁶⁾	12, (24)VDC ⁶⁾			12VDC
Limiting continuous current at 23/85°C	NO/NC 45/30A / 30/25A	15/10A	(NO/NC) 15/10A / 10/5A	2x10/2x6A	20/15A both systems
Limiting making current	100/30A	60A	60/12A	2x40A	35A
Limiting breaking current	60/30A	20A	20/10A	2x20A	35A
Limiting short-time current, overload current, ISO 8820-3; rated current ⁵⁾ : 1.35x rated current, t 2.00x rated current, t 3.50x rated current, t 6.00x rated current, t					
Operate/release time max. (typ.)	5/3ms	3/1.5ms			3/1.3ms

Coil Data

Rated coil voltage	12, 24VDC	12, 24VDC			12VDC
Rated coil power	1.6W	1.1W			0.56/0.81W

Other Data

Ambient temperature	-40 to +85°C	-40 to +85°C			-40 to +85°C
Category of environmental protection	Open or sealed	Open or sealed			Sealed
Terminal type	PCB	PCB			PCB
Mounting					
Dimensions lwh	Open: 24x19.25x18.5mm Sealed: 26.5x21.5x21.5mm	Open: 16x13.2x18mm Sealed: 17.2x15x19.5mm			17.6x17x13.4mm

Accessories

1) Please contact TE Connectivity application engineering support for details concerning Power Relay K-S. 2) Please contact TE Connectivity application engineering support for higher current (LCC). 3) QC=quick connect. 4) For products V23086-C1021-A502 / V23086-C1001-A602 lamp load/flasher. 5) Current and time are compatible with circuit protection by a typical automotive fuse. Relay will make, carry and break the specified current. 6) Given data only valid for 12VDC systems; for 24VDC versions please refer to datasheets.

PCB Relays and Plug-in Relays

PK2 THT/THR (V23201-C/R)

- Wave and reflow solderable versions
- 60% volume reduced Power K at increased performance
- PCB area requirements minimized by 50% to 293mm²
- Limiting cont. current 40A²⁾
- High shock and vibration resistance
- For bistable version refer to PK2 Latching THT/THR (V23201-L/T)



Micro K THT/THR (V23086-C1/R1/C2/R2)

- Wave (THT) and reflow (THR/pin-in-paste) solderable versions
- Single and twin versions
- Small power relay
- Limiting continuous current 30A
- Minimal weight
- Low noise operation



Mini ISO

- Pin assignment similar to ISO 7588 part 1
- Plug-in or PCB terminals
- Available for 42VDC applications
- Customized versions on request: 24VDC versions with 0.8mm contact gap, integrated components, customized marking/color, special covers, various contact arrangements and materials



Maxi ISO

- Latching version on request
- Pin assignment similar to ISO 7588 part 1
- Plug-in or PCB terminals
- Customized versions on request: 24VDC versions with 0.8mm contact gap, integrated components (e.g. resistor, diode), customized marking/color, special covers (e.g. notches, release features, brackets)



1 form A, 1 NO	1 form A, 1 NO 1 form C, 1 CO 2 form C, 2 CO	1 form A, 1 NO 1 form A, 1 NO (2 x 87) 1 form C, 1 CO 1 form U, 2 NO	1 form A, 1 NO
12VDC	12VDC	12, (24)VDC ⁶⁾	12, (24)VDC ⁶⁾
40/33A	30/20A NO/NC 30/25A NO/NC 20/15A	60/40A NO/NC 60/45A / 40/30A 2x32/ 2x35A	70/50A
200A 40A	40A (100A) ⁴⁾ 30A 40A 30A	120A 60A 120/45A 60/40A 2x100A 2x40A	240A 70A
3/1.5ms	3/1.5ms	40A 54A, 1800s 80A, 5s 140A, 0.5s 240A, 0.1s 7/2ms	50 A 67A, 1800s 100A, 5s 175A, 0.5s 300A, 0.1s 7/2ms
12VDC 0.8W	12VDC 0.55W 0.57W	12, 24VDC typ. 1.6W	12, 24VDC typ. 2.0W
-40 to +105°C Sealed/Vented PCB	-40 to +105°C Sealed/Vented	-40 to +125°C Dustproof Plug-in, QC ³⁾ , PCB Bracket optional	-40 to +125°C Dustproof Plug-in, QC ³⁾ , PCB Bracket optional
18.5x16.2x16.1mm	Single: 13.2x12.2x10.1 (10.4mm THR) Double: 23.8x13.2x10.1 (10.4mm THR)	26.2x26.2x25.2mm 28.0x28.0x25.5mm 28.5x28.5x25.3mm	26.2x26.2x25.2mm
		Connectors for Mini ISO Relays	Connectors for Maxi ISO Relays

Plug-in Relays

Micro ISO

- High current version with limiting cont. current 30A at 85°C
- ISO plug-in terminals, pin assignment according to ISO 7588 part 3
- Customized versions on request: 24VDC versions with special contact gap, integrated components, customer marking, special covers



Micro Low Noise (V23145)

- Noise level below 50dBA
- Pin assignment according to ISO 7588 part 3
- Plug-in terminals
- Customized versions on request: special marking, special covers (e.g. notches, release features)



Mini/Maxi Shrouded Relays

- Protection class IP67 to IEC 529 (EN 60 529) if used with special connector
- Plug-in terminals
- Pin assignment according to ISO 7588 part 1
- Bracket
- Customized versions on request: integrated components (e.g. diode), customized marking



Contact Data

Contact arrangement	1 form A, 1 NO	1 form C, 1 CO	High Current 1 form A, 1 NO	1 form A, 1 NO	1 form C, 1 CO	1 form A, 1 NO (Mini)	1 form C, 1 CO (Mini)	1 form A, 1 NO (Maxi)
Rated voltage	12, (24)VDC ⁶⁾			12VDC		12VDC		
Limiting continuous current at 23/85°C	30/25A	NO/NC 30/20A / 25/15A	35A/30A	20/15A	NO/NC 20/15A / 15/10A	60A/40A	NO/NC 60/45A / 40/30A	70/50A
Limiting making current	120A	120/40A	120A	100A	40A	120A	120/45A	240A
Limiting breaking current	30A	30/15A	30A	30A	30A	60A	60/40A	70A
Limiting short-time current, overload current, ISO 8820-3; rated current ⁵⁾ :								
1.35x rated current, t	25A	30A		20A		40A	50A	
2.00x rated current, t	34A, 1800s	40A, 1800s		27A, 1800s		54A, 1800s	67A, 1800s	
3.50x rated current, t	50A, 5s	60A, 5s		40A, 5s		80A, 5s	100A, 5s	
6.00x rated current, t	87A, 0.5s	105A, 0.5s		70A, 0.5s		140A, 0.5s	175A, 0.5s	
Operate/release time max. (typ.)	5/3ms			3/2ms	3/4ms	8.5/4ms		

Coil Data

Rated coil voltage	12, 24VDC	12VDC	12VDC	12VDC		12VDC		
Rated coil power	1.4W	typ. 1.1W		0.9W	0.6W	1.5W	1.5W	1.8W

Other Data

Ambient temperature	-40 to +125°C			-40 to +125°C		-40 to +125°C		
Category of environmental protection	Dustproof			Dustproof		Shrouded: protection class IP67 if used with special connector		
Terminal type	Plug-in, QC ³⁾			Plug-in, QC ³⁾		Plug-in, QC ³⁾		
Mounting						Bracket		
Dimensions lwh	23x15.5x25.4mm 23x15.5x26.0mm			23x15.5x25.4mm		32.7x35.5x54.2mm 32.0x32.0x39.0mm		

Accessories

Connectors for Micro ISO Relays

Connectors for Micro ISO Relays

Connectors for Mini ISO Relays

1) Please contact TE Connectivity application engineering support for details concerning Power Relay K-S. 2) Please contact TE Connectivity application engineering support for higher current (LCC). 3) QC=quick connect. 4) For products V23086-C1021-A502 / V23086-C1001-A602 lamp load/flasher. 5) Current and time are compatible with circuit protection by a typical automotive fuse. Relay will make, carry and break the specified current. 6) Given data only valid for 12VDC systems; for 24VDC versions please refer to datasheets. 7) For 12 VDC only.

High Current Solutions

SPR (V23135)

- Full, symmetric star-point disconnection of an electric power steering motor
- Limiting continuous current 90A
- Disconnection of high over-currents up to 200A in 12VDC and up to 60A in 36VDC power nets
- Optimized dimensions



1 form 3, 3 NO
12, (24)VDC ⁶⁾
-/90A (60A at 125°C)
200A/>10 cycles
<20/<10ms
12, 24VDC 1.5W
-40 to +125°C
Sealed
Welding assembly
32.3x18.3x18.8mm

HCR 75 (V23232)

- Limiting continuous current 75A
- Dustproof versions



1 form A, 1 NO	1 form A, 1 NOBI (bifurcated contact)
12, (24)VDC ⁶⁾	12, (24)VDC ⁶⁾
75/50A	75/50A
75A 75A	150A 100A
<15/<15ms	<15/<15ms
12, 24VDC 7.2, 4.4W	12VDC 3.1W
-40 to +125°C	-40 to +125°C
Dustproof	Dustproof
Plug-in, QC ³⁾ (coil)/ Screw terminals (load)	Plug-in, QC ³⁾ (coil)/ Screw terminals (load)
44x36x39mm	44x36x39mm

HCR 150 (V23132)

- Limiting continuous current 150A at 85°C
- Current switching ability up to 300A
- Suitable for voltage levels up to 42VDC
- Heat moisture and vibration resistant
- Minimal contact resistance
- Dustproof and sealed versions



1 form A, 1 NO	1 form B, 1 NC	1 form X (NO-DM)
1 form C, 1 CO ⁷⁾		
12, (24)VDC ⁶⁾	12, (24)VDC ⁶⁾	12, (24)VDC ⁶⁾
180A with cable 25mm ² / 130A with cable 25mm ²	170A with cable 25mm ² / 120A with cable 25mm ²	
300A 300A	300A 300A	
<30/<15ms	<30/<15ms	<30/<15ms
12VDC 4.1W	24VDC 4.1W	12VDC 4.1W
-40 to +125°C	-40 to +125°C	-40 to +125°C
Dustproof/Sealed	Dustproof/Sealed	Dustproof/Sealed
Plug-in, QC ³⁾ (coil)/ Screw terminals (load)	Plug-in, QC ³⁾ (coil)/ Screw terminals (load)	Plug-in, QC ³⁾ (coil)/ Screw terminals (load)
63x40x71mm	63x40x71mm	63x40x71mm

HCR 200 (V23230)

- Limiting continuous current 175A at 85°C
- Current switching ability up to 200A
- Heat moisture and vibration resistant
- Minimal contact resistance
- Protection class IP64



1 form B, 1 NC
12VDC
255A with cable 50mm ² / 175A with cable 50mm ²
200A 120A
<25/<20ms
12VDC 3.9W
-40 to +110°C
Sealed
Plug-in, QC ³⁾ (coil)/ Screw terminals (load)
72x35.5x64.5mm

High Current and Latching*) Solutions

BDS-A (V23130)

- Limiting continuous current 190A at 85°C
- Electrically settable and resettable ON/OFF bistable device
- Suitable for voltage levels up to 42VDC
- High peak current carrying capability up to 1500A

Mini ISO Latching (V23141-L)

- Magnetically latched Mini ISO plug-in relay
- 70A (Maxi) version available on request
- Two coils with set and reset function
- Pin assignment similar to ISO 7588 part 1
- Customized versions on request: special marking, special covers (e.g. notches, release features, brackets)

PK2 Latching THT/THR (V23201-L/T)

- 50A at 125°C, due to reduced coil power consumption (2 coil system)
- 60% volume reduced Power K at increased performance
- PCB area requirements minimized by 50% to 293mm²
- High shock and vibration resistance
- No change of switching state version at breakdown of battery voltage
- For monostable version refer to PK2 THT/THR (V23201-C/R)



Contact Data

Contact arrangement	1 form X (NO-DM)	1 form A, 1 NO	1 form A, 1 NO
Rated voltage	12, (24)VDC ⁶⁾	12VDC	12VDC
Limiting continuous current at 23/85°C	260/190A	40/30A	50/40A
Limiting making current	1500A (>5ops.)	200A	200A
Limiting breaking current	1500A (>5ops.)	40A	40A
Operate/release time max. (typ.)	<15/<15ms	1.5/1.5ms	1.5ms

Coil Data

Rated coil voltage	12, 24VDC	12VDC	12VDC
Rated coil power	(only impulse needed)	(only impulse needed)	(only impulse needed)

Other Data

Ambient temperature	-40 to +120°C	-40 to +125°C	-40 to +125°C
Category of environmental protection	Dustproof/Weatherproof	Dustproof	Sealed/Vented
Terminal type	Plug-in, QC (coil)/ Screw terminals (load)	Plug-in, QC ³⁾	PCB
Mounting			
Dimensions lwh	36x33x60mm	30.1x30.1x31.1mm	18.5x16.2x16.1mm

Accessories

Connectors for Mini ISO Relays

1) Please contact TE Connectivity application engineering support for details concerning Power Relay K-S. 2) Please contact TE Connectivity application engineering support for higher current (LCC). 3) QC=quick connect. 4) For products V23086-C1021-A502 / V23086-C1001-A602 lamp load/flasher. 5) Current and time are compatible with circuit protection by a typical automotive fuse. Relay will make, carry and break the specified current. 6) Given data only valid for 12VDC systems; for 24VDC versions please refer to datasheets. 7) Max. continuous operation time is limited and depends on operating conditions. Consult TE for details. 8) Min. 10 fault break operations. *) Further latching solutions on request.

High Voltage Precharge Relays

Mini K HV (V23700-C/F)

- Compact high voltage relay for precharge applications up to 450V
- Precharge currents up to 20A
- Limiting break currents up to 20A
- Available with PCB and plug-in terminals



1 form X (NO-DM)
400VDC

n/a ⁷⁾

20A (make, >10 ⁵ ops.)
20A (break, >10ops.) ⁸⁾
2.5/1ms

12VDC ⁷⁾

2.9W ⁷⁾

-40 to +85°C
Sealed

Plug-in, QC ³⁾ , PCB

25.6x20.7x19.3mm (PCB version)
29.8x29.8x51.4mm (plug-in version)

Low Power PCB Relays

PE

- Sensitive coil 200mW
- 4kV coil-contact
- Low height 10.0mm
- Polarized bistable version available



RE/REL

- Sensitive coil 200mW
- 4kV coil-contact (REL)
- PCB area 200mm²



EJ

- Slim outline
- Sensitive coil 200mW
- Ambient temperature 85°C
- Coil UL class F (155°C) insulation system



Contact Data

Contact arrangement	1 form C, 1 CO	1 form A, 1 NO	1 form A, 1 NO
Rated voltage	250VAC	250VAC	250VAC/30VDC
Rated current	5A	6/5A	3A/5A
Switching power	1250VA	1500/1250VA	1250VA/150W
Contact material	AgNi90/10, AgSnO	AgNi, AgNiO.15, AgCdO	AgNi
Min. recommended contact load			100mA at 5VDC

Coil Data

Magnetic system	DC, bistable	DC	DC
Rated coil voltage	3 to 48VDC	5 to 48VDC	3 to 24VDC
Rated coil power	200mW	200/360mW	200mW

Insulation Data

Initial dielectric strength			
between open contacts	1000Vrms	1000Vrms	750Vrms
between contact and coil	4000Vrms	4000/3000Vrms	4000Vrms
between adjacent contacts			
Clearance/creepage			
between contact and coil	3.2/4mm	4/4mm	5.5/8mm (WG type)

Other Data

Ambient temperature (max.)	+85°C	+85/+70°C	+85°C (standard type) +105°C (WG type)
Category of environmental protection IEC 61810	RTII	RTIII (RE), RTII (REL)	RTII, RTIII
Terminal type	THT	THT	THT
Mounting	PCB	PCB	PCB
Dimensions lwh	20x10x10mm	20x10x10.6mm/20.7x10.7x12mm	20.4x6.9x15mm

Accessories

1) Recommended minimum load indication for contact material: Au and gold plated: 1mA at 6VDC; Ag, AgNiO.15 and AgNi90/10: 10mA at 12VDC; AgCdO and AgSnO₂: 100mA at 12VDC. Please contact technical support for detailed technical data.

Low Power PCB Relays

PCJ

- Slim outline
- Sensitive coil 200mW
- Meet 4kV dielectric between coil and contacts
- WG type available (IEC 60335-1)
- Ambient temperature up to 105°C
- Coil UL class F (155°C) insulation system



OSA

- Meet UL TV-3, CSA TV-4 ratings (DM5 type only)
- Meet 4kV dielectric voltage; 7kV surge voltage between coil and contacts



PCH

- Compact size
- Meet 8kV surge voltage between coil and contacts
- Cadmium-free contacts
- WG type available (IEC 60335-1)
- TV-3 ratings for NO contact



OJ/OJE/T77

- Miniature size
- Meet 4kV dielectric between coil and contacts (OJ/OJT)
- Sensitive coil 200mW type available
- Meet UL TV-5 ratings (OJT)



1 form A, 1 NO	2 form A, 2 NO	1 form C, 1 CO 1 form A, 1 NO	1 form A, 1 NO
250VAC 3A/5A (WG type)	240VAC/30VDC 3A/5A	277VAC/30VDC 3/5/10A	250VAC/28VDC 3/5/8/10A
750VA/1250VA (WG type)	300VA/72W (DM3) 1100VA/150W (DM5)	1400VA/150W (NO) 850VA/90W (NC)	720 to 2500VA/ 90 to 240W
AgNi 100mA at 5VDC	AgSnO 100mA at 5VDC	100mA at 5VDC	100mA at 5VDC
DC 5 to 24VDC 200mW	DC 5 to 48VDC 540mW	DC, sensitive 3 to 48VDC 200/400mW	DC, sensitive 3 to 48VDC 200/250/450mW
750Vrms 4000Vrms	1000Vrms 4000Vrms 2000Vrms	750Vrms 4000Vrms	750/1000Vrms 3000/4000Vrms
8/>8 mm	7/7mm	1.6/3.2mm	1.6/3.2mm and 3.2/6.4mm
+85°C (standard type) +105°C (WG type)	+60°C	+70°C (standard type) +85°C (WG type)	up to 85°C
RTII, RTIII THT PCB 20.4x7x15mm	RTII, RTIII THT PCB 24.4x12.9x25mm	RTII, RTIII THT PCB 20x10x15.2mm	RTII, RTIII THT PCB 18.2x10.2x14.7mm

Low Power PCB Relays

PCN

- Only 5mm wide slim type, permitting high density spacing
- Sensitive coil 120mW
- Cadmium free contacts
- Reinforced insulation type available
- UL class F (155°C) available



SNR

- Only 5mm wide
- Cadmium-free contacts
- Sensitive coil 170mW
- 4kV coil-contact
- 6/8mm creepage/clearance
- Protection class II



RYII

- 5kV/8mm coil-contact
- Reinforced insulation
- Low height 12.3mm
- Pinnings 3.2 and 5mm
- Reflow solderable version



Contact Data

Contact arrangement

1 form A, 1 NO

1 form C, 1 CO
1 form A, 1 NO

1 form C, 1 CO
1 form A, 1 NO
1 form B, 1 NC

Rated voltage

250VAC/30VDC

250VAC

250VAC

Rated current

3A/5A

6A

8A

Switching power

750VA/1250VA

1500VA

2000VA

Contact material

AgNi gold plated bifurcated contact

AgNi0.15, AgSn0

Min. recommended contact load

1mA, 5VDC

1)

1)

Coil Data

Magnetic system

DC

DC

DC

Rated coil voltage

3 to 24VDC

5 to 48VDC

5 to 60VDC

Rated coil power

120mW

170mW

220mW

Insulation Data

Initial dielectric strength

between open contacts

750Vrms

1000Vrms

1000Vrms

between contact and coil

3000Vrms

4000Vrms

5000Vrms

between adjacent contacts

Clearance/creepage

between contact and coil

min. 3.5/3.5mm

6/8mm

8/8mm

Other Data

Ambient temperature (max.)

+70°C
(+85°C under a specific condition)

+85°C

+70°C

Category of environmental protection
IEC 61810

RTIII

RTIII

RTII, RTIII

Terminal type

THT

THT

THT, THR

Mounting

PCB

PCB or on socket

PCB or on socket

Dimensions lwh

20x5x12.5mm

28x5x15mm

28.5x10.1x12.3mm

Accessories

DIN rail sockets

PCB sockets

1) Recommended minimum load indication for contact material: Au and gold plated: 1mA at 6VDC; Ag, AgNi0.15 and AgNi90/10: 10mA at 12VDC; AgCd0 and AgSn0₂: 100mA at 12VDC. Please contact technical support for detailed technical data.

Low Power PCB Relays

MSR/T75

- High inrush currents with AgSnO contacts
- 4kV/8mm coil-contact
- Reinforced insulation



1 form C, 1 CO 1 form A, 1 NO
250VAC 8/10A 2000VA AgNi90/10, AgSnO ₁
DC 3 to 60VDC 220mW
1000Vrms 4000Vrms
8/8mm
+85°C
RTII, RTIII THT PCB 28.6x10x15mm

RZ

- Sensitive coil 400mW
- 5kV/10mm coil-contact
- Reinforced insulation
- Ambient temperature 85 or 105°C
- Height 15.7mm
- In acc. to IEC 60335-1



1 form C, 1 CO 1 form A, 1 NO
250VAC 16A 4000VA AgNi90/10, AgSnO
DC 5 to 48VDC 400mW
1000Vrms 5000Vrms
10/10mm
+85°C +105°C (HOT type) +70°C (transparent cover type)
RTII THT PCB 29x12.7x15.7mm

RT

- Sensitive DC and AC coil
- Bistable version
- 5kV/10mm coil-contact
- Reinforced insulation
- Ambient temperature 85°C
- THR (reflow) version
- WG version acc. to IEC 60335-1



1 form C, 1 CO 1 form A, 1 NO 2 form C, 2 CO 2 form A, 2 NO
250VAC 8/16A 2000/4000VA AgNi90/10, AgSnO
DC, AC, bistable 5 to 110VDC/24 to 230VAC 400mW/0.75VA
1000Vrms 5000Vrms 2500Vrms
10/10mm
+85°C +75°C (AC type)
RTII, RTIII THT, THR (DC and AC type) PCB or on socket 29x12.7x15.7mm PCB and DIN rail sockets

RTX

- 1 pole 16A, 1 form A contact
- 16A rated fluorescent load acc. EN60669-1
- Inrush peak currents up to 320A
- Bistable coil
- 5kV/10mm coil-contact
- Reinforced insulation



1 form A, 1 NO
250VAC 16A 4000VA W (pre-make contact) + AgSnO ₂
DC, polarized, bistable 5 to 48VDC 650/665mW
1250Vrms 5000Vrms
min. 6/6mm
+70°C
RTII THT PCB 29.1x12.7x16mm

Low Power PCB Relays

RT specials

- Versions:
- Sensitive coil 250mW
- Inrush peak currents up to 165A
- 105°C ambient temperature
- Bifurcated contacts
- WG version acc. to IEC 60335-1



OZ

- UL TV-8 (OZT) available
- Meet 5kV dielectric voltage between coil and contacts
- Meet 10kV surge voltage between coil and contacts



RP3SL

- 4kV/8 mm coil-contact for 120A/20ms inrush peak current
- Bistable version



Contact Data

Contact arrangement	1 form C, 1 CO 1 form A, 1 NO	1 fom A, 1 NO 1 form C, 1 CO	1 form A, 1 NO
Rated voltage	250VAC	240VAC/24VDC	250VAC
Rated current	12/16A	16A	16A
Switching power	4000VA	3840VA/380W	4000VA
Contact material	AgNi90/10, AgSn0, W	AgSn0	AgSn0
Min. recommended contact load		100mA at 5VDC	

Coil Data

Magnetic system	DC, bistable	DC	DC
Rated coil voltage	5 to 110VDC	5 to 48VDC	6 to 110VDC
Rated coil power	200/250/400mW	540mW/720mW	500mW

Insulation Data

Initial dielectric strength			
between open contacts	1000Vrms	1000Vrms	2000Vrms
between contact and coil	5000Vrms	5000Vrms	4000Vrms
between adjacent contacts			
Clearance/creepage			
between contact and coil	10/10mm	5.5/8mm	8/8mm

Other Data

Ambient temperature (max.)	+85°C/+105°C	+60°C (standard type) +70°C (sensitive type)	+70°C
Category of environmental protection IEC 61810	RTII, RTIII (sensitive and bifurcated type)	RTII, RTIII	RTII, RTIII
Terminal type	THT	THT	THT
Mounting	PCB or on socket	PCB	PCB or on socket
Dimensions lwh	29x12.7x15.7mm	29.2x12.8x20.6mm	29x12.6x25.5mm

Accessories

PCB and DIN rail sockets

1) Recommended minimum load indication for contact material: Au and gold plated: 1mA at 6VDC; Ag, AgNi0.15and AgNi90/10: 10mA at 12VDC; AgCd0 and AgSNO₂: 100mA at 12VDC. Please contact technical support for detailed technical data.

Low Power PCB Relays

RP-2pole 1.5mm

- 2 pole 8A
- 1.5mm contact gap per pole
- Creepage distance complies with IEC 60950



2 form A, 2 NO
250VAC
8A
2000VA
AgSnO
DC
5 to 110VDC
780mW
1000Vrms
4000Vrms
2500Vrms
7/8mm
+40°C
RTII, RTIII
THT
PCB or on socket
29x12.6x25.5mm
PCB and DIN rail sockets

OMI/OMIH/OMIT

- Meet 5kV dielectric voltage
- 10kV surge voltage between coil and contacts
- Version with 1 form A, 1 NO contact TV-5 rating (OMIT)



1 form C, 1 CO
1 form A, 1 NO
250VAC/30VDC
10A/16A
2500VA/300W
4000VA/480W
AgSnO
100mA at 5VDC
DC
5 to 48VDC
540/720mW
1000Vrms
5000Vrms
>8/>8mm
+60°C (standard type)
+70°C (sensitive type)
RTII, RTIII
THT
PCB
29.2x12.8x20.6mm

SDT

- Meet UL TV-5 and TV-8 ratings
- Immersion cleanable, sealed version available
- Applications: appliance, HVAC, FPD, monitor display



1 form A, 1 NO
250VAC/30VDC
5A, 10A
1250VA, 150W (LMR)
2500VA, 300W (DMR)
100mA at 5VDC
DC
5 to 48VDC
250, 540mW
1000Vrms
4000Vrms
1.6/3.2mm
+70°C
RTII, RTIII
THT
PCB
24.4x10.4x25.0mm

RF

- QC² terminals on load side
- Ambient temperature up to 125°C
- Switching capacity 4000VA
- Coil power 400mW
- Reinforced insulation
- WG version acc. to IEC 60335-1



1 form A, 1 NO
1 form B, 1 NC
250VAC
16A
4000VA
AgNi90/10
DC
5 to 60VDC
400mW
1000Vrms
4000Vrms
8/8mm
+85°C
+105°C (HOT type)
RTII
THT/QC ² terminals
PCB
40.5x12.7x16mm

Low Power PCB Relays

410

- Ambient temperature up to 125°C
- QC²⁾ terminals on load side
- Version with contact gap >3mm
- Insulation to VDE 0631 and VDE 0700
- WG version acc. to IEC 60335-1



PB/PBH

- Environmentally-friendly cadmium-free contacts
- Ambient temperatures up to 105°C (PBH)
- Compact and simple design gives high process security



ORWH

- Compact relay with 1 form A and 1 form C contact arrangement
- 10A switching capacity
- Flux proof or sealed type available



Contact Data

Contact arrangement	1 form A, 1 NO 1 form B, 1 NC	1 form C, 1 CO 1 form A, 1 NO	1 form A, 1 NO 1 form C, 1 CO
Rated voltage	250VAC	250VAC	277VAC/28VDC
Rated current	16A	10A	10A
Switching power	4000VA	2500VA	2770VA/360W
Contact material	AgCdO, AgNi	AgNi90/10, AgSnO	AgZnO, AgCdO, AgNi
Min. recommended contact load			100mA at 5VDC

Coil Data

Magnetic system	DC	DC	DC
Rated coil voltage	6 to 60VDC	5, 6, 12, 24VDC	3 to 48VDC
Rated coil power	360mW	360mW/500mW	360mW

Insulation Data

Initial dielectric strength			
between open contacts	1000Vrms	1000Vrms	750Vrms
between contact and coil	4000Vrms	2500Vrms	1500Vrms
between adjacent contacts			
Clearance/creepage			
between contact and coil	8/8mm	3/4mm	1.6/3.2mm

Other Data

Ambient temperature (max.)	+125°C (standard type) +85°C (3mm type)	+85°C/+105°C	+70°C/+105°C
Category of environmental protection	RTII	RTII	RTII, RTIII
Terminal type	THT/QC ²⁾ terminals	THT	THT
Mounting	PCB	PCB	PCB
Dimensions lwh	40.5x12.5x28.5mm	15x15x20mm	19.0x15.5x15.8mm

Accessories

1) Recommended minimum load indication for contact material: Au and gold plated: 1mA at 6VDC; Ag, AgNi0.15 and AgNi90/10: 10mA at 12VDC; AgCdO and AgSnO₂: 100mA at 12VDC. Please contact technical support for detailed technical data. 2) QC=quick connect.

Low Power PCB Relays

430

- 4kV/8mm coil-contact
- DC or AC coil
- PCB mounting or QC²)
- Mounting brackets or snap mounting
- 1 or 2 pole versions



419

- Contact gap >3mm
- Switching capacity 4000VA
- DC or AC coil
- Safety mains insulation
- 4kV/8mm coil-contact
- QC²) terminals
- Snap or screw mount



1 or 2 form C, 2 CO 1 or 2 form A, 2 NO
250VAC
10A
2500/4000VA
1)
DC, AC
6 to 110VDC/6 to 240VAC
1W/1.8VA
1000Vrms
4000Vrms
8/8mm
+70°C
RTI
THT, QC ²) terminals
PCB, panel mount
35.5x16.4x30.5mm

2 form A, 2 NO
250VAC
16A
4000VA
1)
DC, AC
6 to 24VDC/120 to 400VAC
1.3 W/2.0 to 2.5VA
2000Vrms
4000Vrms
6/8mm
+90°C
RTI
QC ²) terminals, Rast 5
Panel mount
48x25.4x47.3mm

Force Guided Relays

SR2M

- 2 pole relay with force guided contacts according to EN 50205
- Reinforced insulation between poles



SR4 D/M

- 4 pole relay with force guided contacts according to EN 50205
- Compact design, space efficient



SR6

- 4/6 pole relay with force guided contacts according to EN 50205
- Reinforced insulation between all contacts



Contact Data

Contact arrangement

1 form A + 1 form B, 1 NO + 1NC
2 form C, 2 CO

3 form A + 1 form B, 3 NO + 1 NC
2 form A + 2 form B, 2 NO + 2 NC

3 form A + 1 form B, 3 NO + 1 NC
2 form A + 2 form B, 2 NO + 2 NC
3 form A + 3 form B, 3 NO + 3 NC
4 form A + 2 form B, 4 NO + 2 NC
5 form A + 1 form B, 5 NO + 1 NC

Rated voltage

250VAC

250VAC

250VAC

Rated current

6A

8A

8A

Switching power

Contact material

AgNi

AgSnO₂

AgSnO₂

Min. recommended contact load

5VDC/10mA

5VDC/10mA

5VDC/10mA

Coil Data

Magnetic system

DC

DC

DC

Rated coil voltage

5 to 110VDC

5 to 110VDC

5 to 110VDC

Rated coil power

700mW

800mW

1200/800mW

Insulation Data

Initial dielectric strength

between open contacts

1500Vrms

1500Vrms

1500Vrms

between contact and coil

4000Vrms

4000Vrms

4000Vrms

between adjacent contacts

3000Vrms

2500Vrms

3000/4000Vrms

Clearance/creepage

between contact and coil

8/8mm

10/10mm

5.5/5.5mm, 15/15mm

Other Data

Ambient temperature (max.)

+70°C

+70°C

+70°C

Category of environmental protection
IEC 61810

RTIII

RTIII

RTIII

Terminal type

THT

THT

THT

Mounting

PCB

PCB

PCB

Dimensions lwh

29x12.6x25.5mm

40x13x16.5mm

55x16.5x16.5mm

Accessories

Sockets and relay clips


PCB sockets

1) Recommended minimum load indication for contact material: Au and Au plated: 1mA at 6VDC; Ag, AgNi0.15 and AgNi90/10: 10mA at 12VDC; AgCdO and AgSnO₂: 100mA at 12VDC. Please contact technical support for detailed technical data. 2) QC=quick connect.

Force Guided Relays and Panel / Plug-In Relays

**Relay Module
SR2Z/SR6Z**

- 2/6 pole relay with force guided contacts according to EN50205
- DIN rail mounting



**Slim Interface
SNR**

- Sensitive coil 170mW
- Strong coil pins for DIN-rail socket
- 4kV coil-contact, 6/8mm clearance/creepage
- Reinforced insulation
- Reduced system width



**Interface
Relay RT**

- Sensitive coil 400mW
- Cadmium-free contacts
- Reinforced insulation
- 4kV/8mm coil-contact



**Interface
Relay XT**

- Sensitive coil 400mW
- Cadmium-free contacts
- Reinforced insulation
- 4kV/8mm coil-contact
- Manual test tab
- Mechanical and electrical indicator



1 form A + 1 form B, 1 NO + 1NC 2 form C, 2 CO 3 form A + 3 form B, 3 NO + 3 NC 4 form A + 2 form B, 4 NO + 2 NC 5 form A + 1 form B, 5 NO + 1 NC	1 form C, 1 CO	1 form C, 1 CO 2 form C, 2 CO	1 form C, 1 CO 2 form C, 2 CO
250VAC	250VAC	240VAC	240VAC
6/8A	6A	8/16A	8/16A
	1500VA	2000/4000VA	2000/4000VA
AgNi/AgSnO ₂	AgSnO ₂ , AgSnO ₂ Au plated	AgSnO ₂ , AgNi90/10, AgNi90/10 Au plated	AgNi90/10
5VDC/10mA	1)	1)	12VDC/10mA
DC or AC/DC	DC	DC, AC	DC, AC
6 to 230VAC/VDC	5 to 60VDC	12 to 110VDC/24 to 230VAC	12 to 110VDC/24 to 230VAC
700mW/1200mW	170mW	400mW/0.75VA	400mW/0.75VA
1500/1000Vrms 4000/3000Vrms 2000Vrms	1000Vrms 4000Vrms	1000Vrms 4000/5000Vrms 2500Vrms	1000Vrms 4000/5000Vrms 2500Vrms
8/8mm, 5.5/5.5mm	≥6/8mm	≥8/8mm	≥8/8mm
+50°C	relay +85°C, in socket +55°C	+70/+85°C	+70/+85°C
Screwless	RTIII Plug-in	RTII Plug-in	RTII Plug-in
DIN rail	Socket	Socket	Socket
Module width 20/46mm	28x5x15mm	29x13x15.7mm	29x13x26.7mm
	DIN rail sockets, jumper bars	DIN rail and PCB sockets, clips, marking tags, modules, jumper bars	DIN rail and PCB sockets, clips, marking tags, modules, jumper bars

Panel / Plug-In Relays

R10

- Broad range of coil options provide sensitivity ranging from 25 to 750mW
- Various contacts switch from dry circuit to 7.5A
- Many mounting and termination options



PT/KH/PTH

- Sensitive coil
- Low height 29/33mm
- Cadmium-free contacts
- Mechanical indicator
- Manual test tab, optionally lockable
- optional LED, protection diode



Contact Data

Contact arrangement	1, 2, 3, 4, 6, 8 form C (CO)
Rated voltage	115VAC, 115VDC
Rated current	0.5/2/3/7.5A
Switching power	862VA max.
Contact material	Ag, AgCdO, Ag w/ Au overlay
Min. recommended contact load	Dry circuit to 12VDC/300mA

Contact arrangement	2 form C, 2 CO; 3 form C, 3 CO; 4 form C, 4 CO
Rated voltage	240VAC
Rated current	1/2/5/6/10/12A
Switching power	1500/2500/3000VA
Contact material	AgNi90/10, AgNi90/10 Au plated
Min. recommended contact load	¹⁾ Bifurcated contacts for dry circuit available on KH

Coil Data

Magnetic system	DC, AC
Rated coil voltage	3 to 115VDC/6 to 115VAC
Rated coil power	36mW to 1.6W/1.5VA

Magnetic system	DC, AC
Rated coil voltage	6 to 220VDC/6 to 240VAC
Rated coil power	750 to 900mW/1 to 1.2VA

Insulation Data

Initial dielectric strength	
between open contacts	500/1000Vrms
between contact and coil	1000Vrms
between adjacent contacts	
Clearance/creepage	
between contact and coil	

Initial dielectric strength	
between open contacts	1200Vrms
between contact and coil	2500Vrms
between adjacent contacts	2000/2500Vrms
Clearance/creepage	
between contact and coil	≥4/4mm

Other Data

Ambient temperature (max.)	+75°C
Category of environmental protection IEC 61810	RTI, RTIII
Terminal type	Solder/plug-in and PCB
Mounting	Socket, panel mount and PCB
Dimensions lwh	29.6x18.7x30.2mm

Ambient temperature (max.)	+70°C
Category of environmental protection IEC 61810	RTII
Terminal type	THT, plug-in, QC ²⁾
Mounting	Socket, PCB
Dimensions lwh	28x22.5x29/30/36mm

Accessories

Solder/PCB sockets, clips, hold down strap, mounting strip

DIN rail and PCB sockets, clips, marking tags, modules, jumper bars

¹⁾ Recommended minimum load indication for contact material: Au and Au plated: 1mA at 6VDC; Ag, AgNi0.15 and AgNi90/10: 10mA at 12VDC; AgCdO and AgSnO₂: 100mA at 12VDC. Please contact technical support for detailed technical data. ²⁾ QC=quick connect.

Panel / Plug-In Relays

PTF/K10

- Mounting options include socket, PCB, top flange
- DC and AC coils
- LED versions available



2 form C, 2 CO
120/240VAC
10/15A
1800/2500VA
AgCdO, AgNi90/10 ¹⁾
DC, AC
6 to 220VDC/6 to 240VAC
750 to 900mW/1 to 1.2VA
1200/1000Vrms
2500/1500Vrms
2500/1500Vrms
≥3.1/3.1mm
+70°C
RTII
QC ²⁾ , solder, PCB
Socket and bracket mount
28x22.5x29/34.9mm

Screw, solder and PCB sockets and clips

KRPA/MT

- Industry standard octal/undecal type termination for quick installation
- DC and AC coils
- Mechanical indicator, indicator lamp and push-to-test options



1 form C, 1 CO (KRPA); 2 form C, 2 CO; 3 form C, 3 CO
240VAC
4/10A
500/2400/2500VA
AgCdO, AgNi90/10, AgNi90/10 Au plated
¹⁾ Bifurcated contacts for dry circuit available on MT
DC, AC
6 to 220VDC/6 to 240VAC
760mW to 1.3W/0.74 to 2.3VA
1000/1500Vrms
1000/2500Vrms
1000/2500Vrms
≥2.8/4mm
DC +60/+70°C
AC +50/+55°C
RTI
Plug-in
Socket
35.7x35.7x50.8/57mm

DIN rail and PCB sockets, clips, marking tags, modules

Panel / Plug-In Relays

RM2/3/7

- Wide selection of termination and mounting styles
- PC terminals available
- Push to test button and indicator lamps
- Class B coil insulation



KUP/KUMP/KUIP

- Wide selection of termination and mounting styles
- Broad range of contact forms
- PC terminals available
- Push to test button and indicator lamps
- Class B coil insulation



RM8/C/D

- Power relay with push-on and solder terminals
- Various mounting options
- Class B coil insulation
- Optional push to test button, indicator lamps and mechanical indicator



Contact Data

Contact arrangement	2 form C, 2 CO 3 form C, 3 CO
Rated voltage	400VAC
Rated current	10/16A
Switching power	3800/6000VA
Contact material	AgCdO, AgNi90/10 in preparation
Min. recommended contact load	1)

Coil Data

Magnetic system	DC, AC
Rated coil voltage	6 to 220VDC/6 to 400VAC
Rated coil power	1.2 to 1.8W/2 to 2.8VA

Insulation Data

Initial dielectric strength	
between open contacts	1500Vrms
between contact and coil	2500Vrms
between adjacent contacts	2500Vrms
Clearance/creepage	
between contact and coil	≥4/14.9mm

Other Data

Ambient temperature (max.)	+50/+70°C
Category of environmental protection IEC 61810	RTI
Terminal type	THT, Plug-in, solder, QC ²⁾
Mounting	Socket, PCB, bracket, flange mount and DIN-snap-on
Dimensions lwh	38.5x35.5x48.5mm

Accessories

DIN rail and PCB sockets, clips

Contact arrangement	1, 2, 3, 4 form C (CO); 1, 2, 3 form A (NO); 2, 3 form B (NC) 1 form X (NO-DM); 1 form Y (NC-DB); 1 form Z (CO-DM/DB)
Rated voltage	240VAC
Rated current	10/15A
Switching power	2400/4155VA
Contact material	Ag, AgCdO, AgSnInO
Min. recommended contact load	12VDC/100mA (Ag) 12VDC/300mA (AgCdO, AgSnInO)

Magnetic system	DC, AC
Rated coil voltage	5 to 110VDC/6 to 240VAC
Rated coil power	1.2 to 1.8W/2 to 2.7VA

Initial dielectric strength	
between open contacts	1200Vrms
between contact and coil	2200/3750Vrms
between adjacent contacts	2200Vrms
Clearance/creepage	
between contact and coil	≥4/14.9mm

Ambient temperature (max.)	DC +50/+70/+95°C AC +45/+55/+70°C
----------------------------	--------------------------------------

Category of environmental protection IEC 61810	RTI
Terminal type	THT, Plug-in, solder, QC ²⁾
Mounting	Socket, PCB, bracket, flange, stud and tapped core
Dimensions lwh	38.9x35.7x48.4mm

DIN rail, panel and PCB sockets, clips

Contact arrangement	1 form C, 1 CO 2 form C, 2 CO
Rated voltage	400VAC
Rated current	20/30A
Switching power	6000/7500VA
Contact material	AgCdO, AgNi90/10 in preparation
Min. recommended contact load	1)

Magnetic system	DC, AC
Rated coil voltage	6 to 220VDC/6 to 400VAC
Rated coil power	1.2W/2.7VA

Initial dielectric strength	
between open contacts	1500/2000Vrms
between contact and coil	2500Vrms
between adjacent contacts	4000Vrms
Clearance/creepage	
between contact and coil	≥4/14.9mm

Ambient temperature (max.)	DC +60/+65°C AC +40°C
----------------------------	--------------------------

Category of environmental protection IEC 61810	RTI
Terminal type	Solder, QC ²⁾
Mounting	Bracket, top flange panel mount and DIN-snap-on
Dimensions lwh	38.5x35.5x48.5mm

No sockets

1) Recommended minimum load indication for contact material: Au and Au plated: 1mA at 6VDC; Ag, AgNi0.15 and AgNi90/10: 10mA at 12VDC; AgCdO and AgSnO₂: 100mA at 12VDC. Please contact technical support for detailed technical data. 2) QC=quick connect.

Panel / Plug-In Relays

KUHP

- Power relay with push-on and solder terminals
- Various mounting options
- Designed to meet VDE space requirements
- Class B coil insulation



RM5/6/B 3mm

- 3mm contact gap
- DC or AC coil
- Push-to-test button
- Plug-in version, PCB terminals or chassis or DIN-rail mount



KUGP

- 3mm contact gap
- DC or AC coil
- Plug-in version, PCB terminals or chassis mount



KUL

- Magnetic latching
- Single and dual coils
- Panel mounting



1 form C, 1 CO 2 form C, 2 CO
240VAC, 50/60Hz; 28VDC 20/30A 4800/7200VA AgCdO, AgSnInO
12VDC/300mA
DC, AC 6 to 110VDC 50/60Hz. 6 to 277VAC 1.2W/2.7VA
1200Vrms 3750Vrms 3750Vrms
DC +45°C AC +75°C
RTI, RTO Solder, PCB THT, QC ²⁾ Bracket and top flange panel mount 38.9x35.7x48.4mm
No sockets

2 form A, 2 NO 3 form A, 3NO
240/400VAC 10/16A 3800/6000VA AgCdO, AgNi90/10 in preparation
¹⁾
DC, AC 6 to 220VDC/6 to 400VAC 1.2W/2.7VA
2500Vrms 2500Vrms 2500Vrms
≥4/14.9mm
+50/+60°C
RTI Plug-in, solder, QC ²⁾ , PCB THT Socket, PCB, bracket, flange mount and DIN-snap-on 38.5x35.5x48.5mm
DIN rail and PCB sockets, clips

1 form C, 1 CO 2 form A, 2 NO 2 form C, 2 CO 3 form C, 3 CO
240/400VAC 10A 2400VA Ag, AgCdO 12VDC/100mA (Ag) 12VDC/300mA (AgCdO)
DC, AC 6-110VDC/6 to 240VAC 1.8W/2.7VA
3500Vrms 2200Vrms 2200Vrms
>8mm
DC +75°C AC +70°C
RTI THT, Plug-in, solder, QC ²⁾ , PCB Socket, PCB, bracket and flange mount 38.9x35.7x48.4mm
DIN rail and PCB sockets, clips

1 form C, 1 CO 2 form C, 2 CO 3 form C, 3 CO
28/240VAC 10A Ag, AgCdO 12VDC/100mA (Ag) 12VDC/300mA (AgCdO)
DC, AC 12 to 48VDC/24 to 120/240VAC 1.6W dual coil/1.2W single coil
500Vrms 1500Vrms 1500Vrms
DC +70°C AC +50/+70°C
RTI .187" QC ²⁾ /solder Socket, bracket 38.9x35.7x54.8mm
Screw, solder, PCB and QC sockets and clips

Panel / Plug-In Relays


KUEP

- 10A relay with various contact arrangements
- Magnetic blowout for 150VDC load switching
- Indicator lamp option



Accessories

- DIN rail and PCB sockets
- Screw and screwless fingersafe terminals
- Retaining and ejection clips
- Marking tags, jumper bars, jumper links
- LED and protection modules

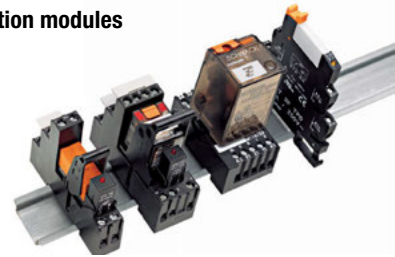

Sets

- Relay package consisting of relay, DIN rail socket, plastic retaining clip, marking tag and module



Contact Data

Contact arrangement	1 form X (NO-DM) 2 form A, 2 NO 2 form C, 2 CO	1 form C, 1 CO 2 form C, 2 CO 3 form C, 3 CO 4 form C, 4 CO	1 form C, 1 CO 2 form C, 2 CO 3 form C, 3 CO 4 form C, 4 CO
Rated voltage	150VDC/240VAC	240/250VAC	240/250VAC
Rated current	10A	6 to 16A	6 to 16A
Switching power	1500W/2400VA		1500 to 4000VA
Contact material	AgCdO, AgSnOInO		
Min. recommended contact load	12VDC/300mA		1)

Coil Data

Magnetic system	DC, AC		DC, AC
Rated coil voltage	5 to 110VDC/6 to 240VAC		6 to 220VDC/6 to 230VAC
Rated coil power	1.2W to 1.8W/2 to 2.7VA		170 to 700mW/0.4 to 1VA

Insulation Data

Initial dielectric strength			
between open contacts	1200Vrms		
between contact and coil	2200Vrms		
between adjacent contacts	2200Vrms		
Clearance/creepage			
between contact and coil			

Other Data

Ambient temperature (max.)	AC +55/+70°C DC +50/+70°C		
Category of environmental protection IEC 61810	RTI	IP20	
Terminal type	QC ²⁾ /solder and PCB	Screw, screwless, plate mount, PCB	Screw, screwless
Mounting	Socket, PCB, bracket and top flange mount		
Dimensions lwh	38.9x35.7x48.4mm		

Accessories

DIN rail, track mount, chassis mount, and snap-in sockets, clips	PCB, panel mount and DIN rail	DIN, panel mount
------------------------------------------------------------------	-------------------------------	------------------

1) Recommended minimum load indication for contact material: Au and Au plated: 1mA at 6VDC; Ag, AgNi0.15 and AgNi90/10: 10mA at 12VDC; AgCdO and AgSnO₂: 100mA at 12VDC. Please contact technical support for detailed technical data. 2) QC=quick connect.

Power Relay

PRD

- Contact ratings to 50A
- Magnetic blowout available for switching DC loads
- SPDT auxiliary switch available
- Class B insulation system



1 form A, 1 NO
1 form C, 1 CO
1 form X (NO-DM)
2 form A, 2 NO
2 form C, 2 CO
600VAC, 28/125VDC
50A
12000VA
Ag, AgCdO
1A, 12VDC or VAC
DC, AC
6 to 110VDC/6 to 480VAC
2W/9.8VA
2000Vrms
2000Vrms
2000Vrms
>8mm
DC +80°C
AC +45°C
RT 0/open
Screw, QC ²⁾
Panel mount
85.7x63.8x63.5mm
Dust cover

PCB High Power, Metering and Solar Relays

T9A/T9E/T90

- High breaking capacity
- PCB and QC²⁾ connections and chassis mount version
- UL-class F as standard
- Ambient temperature 85°C
- Open version available



T9S

- Specially designed to meet the requirements for the solar industry
- Contact gap >1.5mm
- 350mW hold power,
- Product in accordance to IEC 60335-1
- EN 61095: AC7 at 85°C



T92

- Switching capacity 7500VA
- DC or AC coil
- 4kV/8mm coil-contact
- PCB or QC²⁾ connections or chassis mount



Contact Data

Contact arrangement	1 form C, 1 CO 1 form A, 1 NO	1 form A, 1 NO	2 form C, 2 CO 2 form A, 2 NO
Rated voltage	250VAC	277VAC	400VAC
Rated current	30A	35A	30A
Switching power	7500VA	8750VA	7500VA
Contact material	AgCdO, AgSnInO	AgNi	AgCdO, AgSnInO
Min. recommended contact load	1A at 5VDC or 12VAC		100mA at 6VAC/VDC

Coil Data

Magnetic system	DC	DC	DC, AC
Rated coil voltage	6 to 48VDC	12VDC	6 to 110VDC/12 to 277VAC
Rated coil power	1W/900mW	2.25W/350mW hold power	1.7W/4.0VA

Insulation Data

Initial dielectric strength			
between open contacts	1500Vrms	2500Vrms	1500Vrms
between contact and coil	2500Vrms	4000Vrms	4000Vrms
between adjacent contacts			2000Vrms
Clearance/creepage			
between contact and coil	3.1/6.3mm	3/4 mm	8/9.5mm

Other Data

Ambient temperature (max.)	+85°C	+85°C	+65°C, +85°C
Category of environmental protection IEC 61810	RTO, RTI, RTII, RTIII	RTII	RTI, RTII, RTIII
Terminal type	THT, QC ²⁾	THT	THT, QC ²⁾
Mounting	PCB, panel mount	PCB	Panel mount, PCB
Dimensions lwh	32.3x27.4x20.4mm	32.5x27.4x20.4mm	52.3x34.6x30.8mm

Accessories

1) Recommended minimum load indication for contact material: Au and gold plated: 1mA at 6VDC; Ag, AgNi0.15 and AgNi90/10: 10mA at 12VDC; AgCdO and AgSnO₂: 100mA at 12VDC. Please contact technical support for detailed technical data. 2) QC=quick connect.

PCB High Power, Metering and Solar Relays

EF

- Low profile max. 20.0mm
- QC² terminals for load
- Meet 4kV dielectric voltage between coil and contact
- Ambient temperature 85°C



1 form A, 1 NO
250VAC
20A
5000VA
100mA at 5VDC
DC
5 to 48VDC
900mW
1000Vrms
4000Vrms
6.4/9.5mm
+85°C
RTII
THT/QC ² (#250)
PCB
30.4x16.0x20mm

PCF

- QC² terminal for load (PCF only)
- Height 26.5mm
- Meet 4kV dielectric voltage between coil and contact
- Ambient temperature 85°C



1 form A, 1 NO
250VAC
25A
6370VA
100mA at 5VDC
DC
6 to 24VDC
900mW
1000Vrms
4000Vrms
6.7/>8mm
+85°C
RTII
THT/QC ² (#250)
PCB
30.4x16x26.5mm

PCFN Solar


- Specially designed to meet the requirements for the solar inverter industry
- Contact gap >1.5mm
- 200mW hold power



1 form A, 1 NO
277VAC
26A
7200VA
AgSnO ₂
1)
DC
12VDC
1.5W/200mW hold power
2500Vrms
4000Vrms
6.1/6.1mm
+85°C
RTII
THT
PCB
30.4x16x26.5mm

EW80

- 1 pole 80A, 1 form A (NO) contact
- Polarized bistable (latching), single coil version
- Shunt implementation optional
- Various terminal configurations




1 form A, 1 NO
250VAC
80A
20000VA
AgSnO ₂
1)
Bistable
5 to 24VDC
1W
1500Vrms
4000Vrms
≥6/9mm
+70°C
RTI
QC ²
36.8x17.2x30.4mm

Signal Relays

IM


- 4G telecom/signal relay
- Slim line 10x6mm
- Low profile 5.65mm
- High dielectric version
- High current version
- High contact stability version
- 2/5A UL rating
- Meets Telcordia Technologies Inc. requirements



UL US IEC 60950

IMD/E

- 4G telecom/signal relay
- 2 pole make or break
- Slim line 10x6mm
- Low profile 5.65mm
- High dielectric version
- 2A UL rating
- Meets Telcordia Technologies Inc. requirements



UL US IEC 60950

IMC

- 4G telecom/signal relay
- 1 pole changeover
- Slim line 10x6mm
- Low profile 5.65mm
- High dielectric version
- 3A UL rating
- Meets Telcordia Technologies Inc. requirements



UL US IEC 60950

Contact Data

Contact arrangement	2 form C, 2 CO Bifurcated contacts	2 form B, 2 NC 2 form A, 2 NO Bifurcated contacts	1 form C, 1 CO Bifurcated contacts
Rated voltage	250VAC/220VDC	250VAC/220VDC	250VAC/220VDC
Rated current	2/5A	2A	2/3A
Switching power	60W/62.5VA	60W/62.5VA	60W/62.5VA
Min. recommended contact load	100µV/1µA	100µV/1µA	100µV/1µA
Initial contact resistance	<50mΩ	<50mΩ	<100mΩ

Coil Data

Magnetic system	Polarized	Polarized	Polarized
Rated coil voltage	1.5 to 24VDC	1.5 to 24VDC	1.5 to 24VDC
Rated coil power DC coil/bistable 1 coil/2 coils	50 to 200mW/-/-	140mW/-/-	140mW/-/-

Insulation Data

Initial dielectric strength			
between open contacts	1000 to 1500Vrms	1000Vrms	1000Vrms
between contact and coil	1500 to 1800Vrms	1800Vrms	1800Vrms
between adjacent contacts	1000 to 1800Vrms	1000Vrms	
Initial surge withstand voltage			
between open contacts	1500 to 2500Vp	1500Vp	1500Vp
between contact and coil	2500Vp	2500Vp	2500Vp
between adjacent contacts	1500 to 2500Vp	1500Vp	
Isolation 100/900MHz	-37.0/-18.8dB	-37.0/-18.8dB	-37.0/-18.8dB
Insertion loss 100/900MHz	-0.03/-0.33dB	-0.03/-0.33dB	-0.03/-0.33dB
Volt. standing wave ratio 100/900MHz	1.06/1.49	1.6/1.49	1.6/1.49
Capacitance			
between open contacts	max. 1pF	max. 1pF	max. 1pF

Other Data

Ambient temperature	-40 to +85°C (+125°C)	-40 to +85°C	-40 to +85°C
Category of environmental protection	IP67/RTV	IP67/RTV	IP67/RTV
Terminal type	THT, SMT	THT, SMT	THT, SMT
Dimensions lwh	10x6x5.65mm	10x6x5.65mm	10x6x5.65mm

Signal Relays

IMF

- 4G telecom/signal relay
- 1 pole changeover and one pole break
- Slim line 10x6mm
- Low Profile 5.8mm
- 2A UL rating
- Meets Telcordia Technologies Inc. requirements




UL IEC 60950

1 form C, 1 CO and 1 form B, 1NC Bifurcated contacts
250VAC/220VDC
2A
60W/62.5VA
100µV/1µA
<50mΩ
Polarized
2.4 to 24VDC
80mW
1000Vrms
3000Vrms
3000Vrms
1500Vp
4500Vp
4500Vp
-18.8 dB/-
-0.33dB/-
1.49/-
max. 1pF
-40 to +85°C
IP67/RTV
SMT
10x6x5.8mm

P2

- 3G telecom/signal relay
- Slim line 15x7.5mm
- Switching current max. 5A
- High dielectric version
- Meets Telcordia Technologies Inc. requirements



UL IEC 60950

2 form C, 2 CO Bifurcated contacts
250VAC/220VDC
2A
60W/62.5VA
100µV/1µA
<50mΩ
Polarized
2.4 to 24VDC
140mW/70mW/140mW
1000 to 1500Vrms
1500Vrms
1000 to 1500Vrms
2500Vp
2500Vp
2000Vp
-39.0/-20.7dB
-0.02/-0.27dB
1.4/1.40
max. 1pF
-40 to +85°C
IP67/RTIII
THT, SMT
14.5x7.2x10.4mm, stand. 14.5x7.2x9.9mm, overm.

FX2

- 3G telecom/signal relay
- Slim line 15x7.5mm
- Standard and sensitive coil
- High mechanical shock resistance
- High dielectric version
- Meets Telcordia Technologies Inc. requirements




UL IEC 60950

2 form C, 2 CO Bifurcated contacts
250VAC/220VDC
2A
60W/62.5VA
100µV/1µA
<70mΩ
Polarized
3 to 48VDC
80 to 300mW/-/-
1800 to 2100Vrms
1800 to 3500Vrms
1800 to 2100Vrms
2500 to 2900Vp
3500 to 5000Vp
2500 to 2900Vp
-34.0/-15.1dB
-0.03/-0.60dB
1.07/1.45
max.2pF
-55 to +85°C
IP67/RTV
THT
15x7.3x10.7mm

FT2/FU2

- 3G telecom/signal relay
- Slim line 15x7.5mm
- Standard and sensitive coil
- 125°C ambient temperature
- Suitable for explosive environments
- High dielectric version
- Meets Telcordia Technologies Inc. requirements



UL IEC 60950

2 form C, 2 CO Bifurcated contacts
250VAC/220VDC
2A
60W/62.5VA
100µV/10µA
<70mΩ
Non polarized
3 to 48VDC
200 to 300mW/-/-
1500 to 1800Vrms
1500 to 4000Vrms
1000 to 1500Vrms
1500 to 2500Vp
2500 to 6000Vp
1500 to 2500Vp
-30.6/-13.7dB
-0.02/-0.50dB
1.02/1.27
max. 1pF
-55 to +125°C
IP67/RTIII/RTV
THT, SMT
15x7.5x9.6mm

Signal Relays

D2N V23105

- 2G telecom/signal relay
- 4 coil sensitivities
- 3A UL rating




MT2

- 2G telecom/signal relay
- 5 coil sensitivities
- 2A UL rating



P1 V23026

- Very high sensitive relay
- Low profile
- High vibration and shock resistance
- Version: symmetric pin layout
- Temperature range up to 85°C
- 1500Vrms across opened contacts



Contact Data

Contact arrangement	2 form C, 2 CO Single contacts	2 form C, 2 CO Bifurcated contacts	1 form C, 1 CO Bifurcated contacts
Rated voltage	250VAC/220VDC	250VAC/220VDC	150VAC/125VDC
Rated current	3A	2A	1A
Switching power	60W/125VA	60W/62.5VA	30W/60VA
Min. recommended contact load	100µV/10µA	100µV/1µA	100µV/1µA
Initial contact resistance	<100mΩ	<70mΩ	<50mΩ

Coil Data

Magnetic system	Non polarized	Non polarized	Polarized
Rated coil voltage	3 to 48VDC	3 to 48VDC	3 to 24VDC
Rated coil power			
DC coil/bistable 1 coil/2 coils	150 to 700mW/-/-	150 to 550mW/-/-	65 to 130mW/30 to 130mW/70 to 200mW

Insulation Data

Initial dielectric strength			
between open contacts	750Vrms	750Vrms	500Vrms
between contact and coil	1000Vrms	1000Vrms	1500Vrms
between adjacent contacts	750Vrms	750Vrms	
Initial surge withstand voltage			
between open contacts	1500Vp	1500Vp	
between contact and coil	1500Vp	1500Vp	2500Vp
between adjacent contacts	1500Vp	1500Vp	
Isolation 100/900MHz	-39.0/-20.7dB	-31.8/-14.2dB	-30.0/-18.0dB
Insertion loss 100/900MHz	-0.02/-0.27dB	-0.02/-0.97dB	-0.12/-1.90dB
Volt. standing wave ratio 100/900MHz	1.04/1.40	1.03/1.31	1.06/1.75
Capacitance			
between open contacts	max. 2pF	max. 2pF	max. 5pF


Other Data

Ambient temperature	-25 to +85°C	-55 to +85°C	-40 to +85°C
Category of environmental protection	IP67/RTIII	IP67/RTIII	IP67/RTIII
Terminal type	THT	THT	THT, SMT
Dimensions lwh	20.2x10x11.4mm	20.2x10x11mm	13x7.6x6.9mm

Signal Relays

Reed DIP/SIL

- Direct driving with TTL signals
- Ultrasonic cleanable
- High switching speed
- Clamping diode
- Electrostatic shield



1 form A, 1 NO 2 form A, 2 NO 1 form C, 1 CO Reed contacts
175 to 200VAC/VDC
0.25 to 0.5A
3 to 10W
10µV/1µA
<150mΩ
Non polarized
5 to 24VDC
50 to 300mW/-/-
140 to 175Vrms 1000Vrms
max. 1pF
-20 to +70°C
IP67/RTIII THT
19.3x5.7x7.5mm/19.8x5.1x8mm

Cradle

- Very high reliability
- Great variety of coils and contact sets
- Accessories for socket mounting



Various
30 to 250VAC/VDC
0.2 to 5A
5 W to 500VA
-
on request
Non polarized/Polarized
5 to 220VDC/6 to 230VAC
-/1450 to 1650mW/1450 to 1650mW
500 to 1000Vrms 500 to 2000Vrms on request
on request
-40 to +70°C
IP30 or RTI or RTIII THT or plug-in
24 to 35x19x30mm

TSC

- Designed for thermostat, modem
- Computer peripherals, video recording and security applications
- Low coil power requirements
- IC compability



1 form C, 1 CO
120VAC, 30VDC
1A
120VA, 24W
1mA at 1VDC
50mΩ at 100mA, 6VDC
DC, sensitive
3 to 24VDC
150, 300mW
400Vrms 1000Vrms
1500Vp (10/160µs)
-40 to +80°C
RTIII/IP67 THT
12.5x7.5x10mm

OUAZ/T81

- Gold overlay silver palladium alloy contact suitable for low loads
- High density available on PCB due to small size
- 2.54mm terminal pitch same as IC socket terminal pitch
- Sensitive and standard coils



1 form C, 1 CO 1 form A, 1 NO
120VAC/24VDC
1A
120VA, 30W
1mA at 1VDC
DC, sensitive
5 to 24VDC
200, 450mW
500Vrms 1000Vrms
1500Vp (10/160µs)
-40 to +75°C (sensitive) -40 to +60°C (standard)
RTII, RTIII THT
15.4x10.4x11.2mm

High Frequency Relays/Switches

HF3

- High performance RF relay/switch for up to 3GHz
- Low power consumption ≤70/140 mW
- 50 and 75Ω version
- Very small design



HF3S

- High performance RF relay/switch for up to 3GHz
- Low power consumption ≤70/140mW
- 50 and 75Ω version
- RF power 100W at 2GHz
- Very small design



HF6

- High performance RF relay/switch for up to 6GHz
- Low power consumption ≤70/ 140mW
- 50Ω version
- Very small design



Contact Data

Contact arrangement	1 form C, 1 CO Bridge contacts	1 form C, 1 CO Bridge contacts	1 form C, 1 CO Bridge contacts
Rated voltage	250VAC/220VDC	250VAC/220VDC	250VAC/220VDC
Rated current	2A	2A	2A
Switching power	60W/62.5VA/50W (2.5GHz)	60W/62.5VA/50W (2.5GHz)	60W/62.5VA/50W (2.5GHz)
Min. recommended contact load	100µV/1µA	100µV/1µA	100µV/1µA
Initial contact resistance	<100mΩ	<100mΩ	<100mΩ

Coil Data

Magnetic system	Polarized	Polarized	Polarized
Rated coil voltage	3 to 24VDC	3 to 24VDC	3 to 24VDC
Rated coil power DC coil/bistable 1 coil/2 coils	140mW/70mW/140mW	140mW/70mW/140mW	140mW/70mW/140mW

Insulation Data

Initial dielectric strength	between open contacts	600Vrms	600Vrms	600Vrms
	between contact and coil	1000Vrms	1000Vrms	1000Vrms
	between adjacent contacts			
Initial surge withstand voltage	between open contacts	1000Vp	1000Vp	1000Vp
	between contact and coil	1500Vp	1500Vp	1500Vp
	between adjacent contacts			
Capacitance between open contacts	max. 1pF	max. 1pF	max. 1pF	

RF Data

Isolation	0.1/0.9/3GHz	0.1/0.9/3GHz	0.9/3/6GHz
Insertion loss	-80/-72/-45dB	-95/-80/-55dB	-80/-60/-30dB
Voltage standing wave ratio (VSWR)	-0.03/0.12/-0.35dB	-0.03/-0.12/-0.30dB	-0.05/-0.15/-0.80dB
	1.05/1.15/1.20	1.05/1.10/1.25	1.05 / 1.10 / 1.40

Other Data

Ambient temperature	-55 to +85°C	-55 to +85°C	-55 to +85°C
Category of environmental protection	IP67/RTIII	IP67/RTIII	IP67/RTIII
Terminal type	SMT	SMT	SMT
Dimensions lwh	14.6x7.2x10mm	15x7.6x10.6mm	15x7.6x10.6mm

High Frequency Relays/Switches

HFP

- High power HF relay/switch for up to 3 GHz
- Low power consumption $\leq 70/140\text{mW}$
- 50Ω version
- RF power 300W carrying at 900MHz
- Very small design




1 form C, 1 CO
Bridge contacts
250VAC/220VDC
2A
60W/62.5VA/50W (2.5GHz)
100 μ V/1 μ A
<100m Ω
Polarized
3 to 24VDC
140mW/70mW/140mW
600Vrms
1500Vrms
1000Vp
1500Vp
max. 1pF
0.1/0.9/3GHz
-90/-78/-45dB
-0.03/0.12/-0.50dB
1.05/1.10/1.23
-55 to +85°C
IP67/RTIII
SMT
15x7.6x10.6mm

Circuit Breakers

W28

- Replaces slow blow glass cartridge fuse and holder
- Snap-in mounting
- Button provides visible trip indication
- Push-to-reset
- Right angle QC¹⁾ optional



W23/W31

- Toggle and push/pull actuator; can not be reset against overload



W33

- Combines optional illuminated on/off switching and circuit protection in a single unit
- Optional auxiliary switch



Contact Data

Type	Thermal	Thermal	Thermal
Contact arrangement number of poles	1	1	1-2
Circuit function	Series trip	Series trip	Series trip both poles; series trip 1 pole/ switch only 1 pole; switch only 2 poles
Max. switching voltage (max. operating voltage)	32VDC 250VAC	50VDC 240VAC	50VDC 250VAC
Rated current	0.5A to 20A	0.5A to 50A	2A to 20A
Interrupt capacity	1000A at 250VAC, 50/60Hz, 32VDC	1000A for 0.5 to 50A at 240 VAC/0 to 50A at 50VDC both with 4X max. fuse protection; 2000A for 0.5 to 25A at 50VDC/10 to 20A at 120VAC both without 4X max. fuse protection	1000A at 50VDC, 250VAC/60Hz and 125/250VAC 400Hz; 1500A at 25/250VAC/60Hz
Trip time at 200% of rating	0.25 to 2A models 4.5 to 28s; 3 to 20A models 2.2 to 15s	0.5 to 4A models 11 to 30s; 5 to 50A models 6 to 22s	3 to 33s

Insulation Data

Initial dielectric strength	1500Vrms	1500Vrms	2000Vrms
-----------------------------	----------	----------	----------

Other Data

Ambient temperature	-20 to +60°C	-20 to +65°C	-20 to +65°C
Terminal type	QC ¹⁾	Screw	QC ¹⁾
Mounting	Snap-in	3/8"-24 threaded bushing	Snap-in
Manual operation Actuator	Push-to-reset	Push/pull and toggle	Rocker
Dimensions lwh	39.0x15.9x13.7mm	40.6x17.5x35.2mm	43.8x24.9x48.0mm

Accessories


	Protective boot, push-on lockwasher	Hex nut, lockwasher, knurl nut	
--	-------------------------------------	--------------------------------	--

1) QC=quick connect.

Circuit Breakers


W51

- Compact, rocker actuated design
- Provides circuit protection and power switching in a single unit
- Optional indicator lamp



W54/W57

- Push-to-reset down to 3A with optional bottom marking
- Ignition protection compliant (UL1500) models




W58

- Push-to-reset down to 0.5A with optional bottom marking
- Ignition protection compliant (UL1500)



W6/W9

- Secondary protection, heavy duty magnetic hydraulic for the international market
- Multiple delay curve options
- Optional auxiliary switch, toggle guard and multiple pole single actuation
- Ignition protection compliant (UL1500) models



Thermal	Thermal	Thermal	Magnetic/Hydraulic
1	1	1	1-4
Series trip	Series trip	Series trip	Series trip
50VDC 125/250VAC (model dependent)	50VDC 250VAC	50VDC 250VAC	65VDC 277VAC 480VAC - 3Ø wye
5A to 20A	5A to 40A (W54) 3A to 20A (W57)	0.5A to 30A	0.20A to 50A
1000A	1000A	2000A at 50VDC; 1000A at 250VAC	UL1077 up to 2000ADC/5000AAC; UL1500 up to 3000VDC/1000VAC
4 to 40s	5 to 30s (W54) 4 to 40s (W57)	5 to 30A models 6 to 30s; 1 to 4A models 10 to 45s	30ms to 150s depending upon type of trip curve selected
1500VAC	1500VAC	1500Vrms	50/60Hz, 1500VDC; DC 1100VDC
0 to 60°C QC ¹⁾ and PCB	0 to 60°C QC ¹⁾ and screw	-20 to +65°C QC ¹⁾ and screw	-40 to +85°C QC ¹⁾ , screw and stud
Snap-in, PCB	3/8"-24, M11-1.0, M12-1.0 threaded bushing	7/16"-28, 15/32"-32, 3/8"-24 threaded bushing	6-32, M3 tapped holes
Rocker	Push-to-reset	Push-to-reset	Toggle and rocker
21.8x15.2x32.0mm	31.0x14.6x35.0mm (W54) 22.6x14.6x29.2mm (W57)	34.9x16.8x34.9mm	41.7x19.0x50.8mm (W6 per pole) 46.9x19.0x63.5mm (W9 per pole)
	Protective boot, knurl nut, hex nut, lockwasher, nameplate	Protective boot, knurl nut, hex nut, lockwasher	Toggle guard (W6 only)

Industry Applications



Product Lines

Technical Features

Alternative Energy

Alternative Power Vehicle / Charging

Appli

AUTOMOTIVE



Low Power PCB Relays

1 and 2 poles
10 to 45A
DC and bistable



Low Power Plug-In Relays

20 to 70A
up to 125°C



High Power High Current Devices

1 pole, star point
up to 255A
up to 125°C



High Power High Voltage Relays

900VDC
up to 200A
DC and bistable



GENERAL PURPOSE



Low Power PCB Relays

1 and 2 poles
250VAC
0 to 16A
DC, AC, bistable



High Power Relays

1 and 2 poles
250 to 400VAC
20 to 30A



High Power Latching Relays

250VAC
up to 120A
DC, bistable



Solar Relays

up to 277VAC
up to 35A



Force Guided Relays

2 to 6 poles
250VAC
6 to 8A



Panel / Plug-In Relays

1 to 4 poles
up to 400VAC
0.5 to 30A (50A)
DC, AC, bistable



Circuit Breakers

1 to 4 poles
up to 250VAC (480VAC)
0.2 to 50A



SIGNAL



Signal Relays

1 to 2 (8) poles
up to 250VAC/VDC
0 to 5A



High Frequency Relays/Switches

220VAC/250VDC
up to 2A
70 to 140mW

This Line Card provides a further brief overview of key product lines available from TE Relay Products. More complete details on the products described above, as well as specialty relays, contactors, timers, solid state relays and power transformers, can be found in our datasheets at <http://relays.te.com> and at www.te.com.

Appliances	Automotive	Building Equipment / Lighting	Communication	Industrial	Power Metering
	✓				
	✓				
	✓				
✓		✓	✓	✓	✓
✓		✓		✓	
		✓			✓
		✓		✓	
		✓		✓	
✓		✓	✓	✓	
✓	✓	✓	✓	✓	
	✓		✓	✓	


Product images shown above are not in proportion with one another, and each is only representative of one product within a given product line.

Industry Overview




Alternative Energy

Relays meeting the specific requirements for use in power inverters are among the switching components offered by TE Relay Products for alternative energy applications.

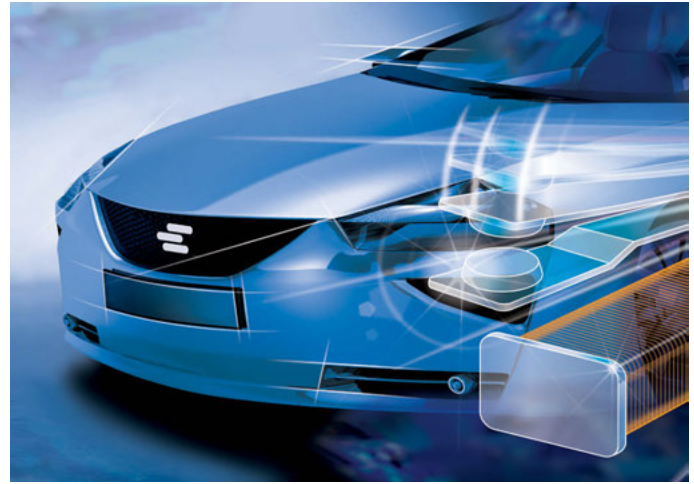


Automotive

TE Relay Products supplies many different switching products for automotive applications. These range from basic electromechanical relays to special function relays, contactors and hybrid modules.

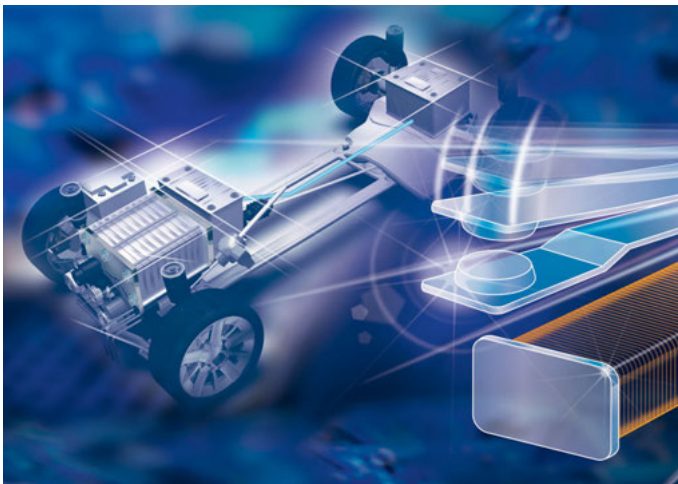

Alternative Power Vehicle/Charging

From miniature relays for PCB mounting to large power contactors, TE Relay Products offers an array of switching solutions for alternative power vehicles and the associated infrastructure.

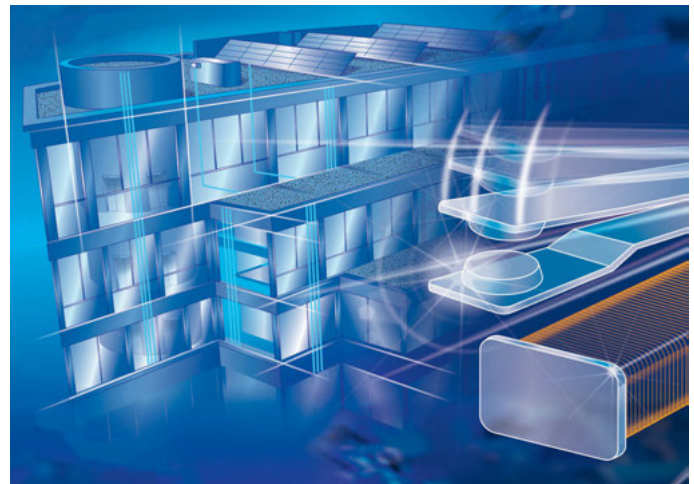

Building Equipment/Lighting

TE Relay Products provides a broad range of products for use in building equipment such as elevators, HVAC systems, alarms and more.

While TE has made every reasonable effort to ensure the accuracy of the information in this catalog, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. TE's only obligations are those stated in TE's General Terms and Conditions

Industry Overview



Appliance

Among the many switching products TE Relay Products provides to appliance manufacturers are signal relays, general purpose relays and circuit breakers.



Industrial

Whether the application is a basic pump control circuit, a complex interface with a programmable logic controller or a safety circuit, industrial machinery designers specify components from TE Relay Products.



Power Metering (ANSI¹⁾ Style)

TE Relay Products is developing a global line of specialized high current relays for the expanding power metering market.



Communication

From high frequency relays for antenna switching to power control relays for end-user equipment, TE Relay Products offers the vast communications market an array of components.

of Business (<http://www.te.com/aboutus/tandc.asp>). The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

1) ANSI is a trademark of American National Standards Institute.



TE Connectivity is a global, \$14 billion company that designs and manufactures approximately 500,000 products that connect and protect the flow of power and data inside the products that touch every aspect of our lives. Our nearly 100,000 employees partner with customers in virtually every industry - from consumer electronics, energy and healthcare, to automotive, aerospace and communication networks -enabling smarter, faster, better technologies to connect products to possibilities.



Tyco Electronics AMP GmbH

a TE Connectivity Ltd. company
TE Relay Products
AMPèrestr. 12-14
64625 Bensheim / Germany
Phone: +49-(0)6251-133-0
Fax: +49-(0)6251-133-1600
www.te.com • relays.te.com

AXICOM, Potter & Brumfield, SCHRACK, TE Tyco Electronics (logo),
TE Connectivity (logo) and TE Connectivity are trademarks of the
TE Connectivity group of companies and its licensors.

Other logos, product or company names mentioned herein may
be trademarks of their respective owners.

Tyco Electronics AMP GmbH certified
acc. ISO 14001 and ISO/TS 16949:2002

© 2012 Tyco Electronics AMP GmbH
1308033-2 Issued 08-2012 EVE1

