



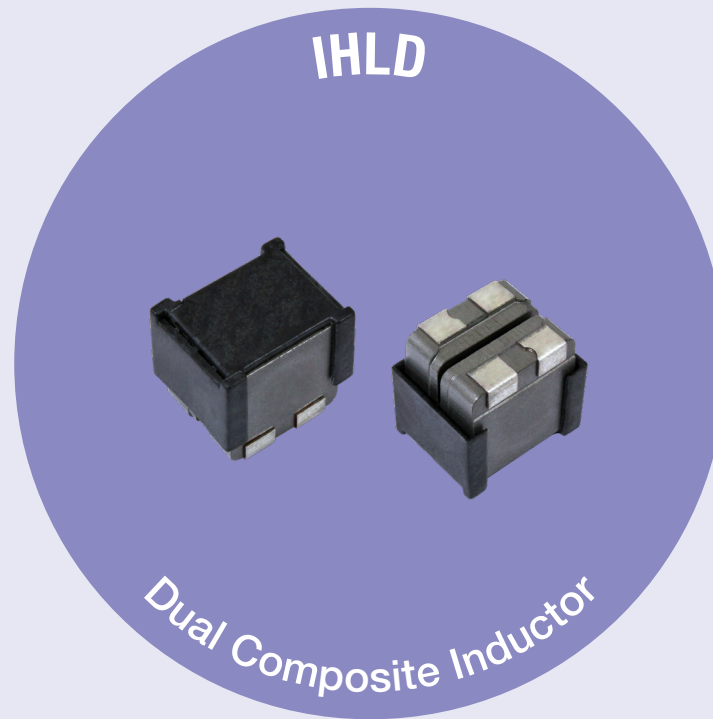

LOW PROFILE, HIGH CURRENT DUAL INDUCTORS

BOTTOM VIEW

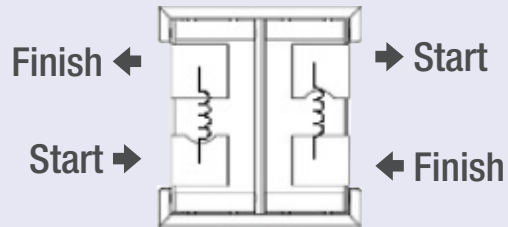

FEATURES

- Two inductors in one package
- High temperature, up to 155 °C
- Shielded construction
- Optimal design realizes high quality sound and low distortion
- Low coupling for minimal crosstalk between inductors
- AEC-Q200 qualified

IHLD-3232HB-5A

- IHLD3232HBER5R0M5A
- IHLD3232HBER100M5A
- IHLD3232HBER150M5A
- IHLD3232HBER220M5A
- IHLD3232HBER330M5A



IHLD-4032KB-5A

- IHLD4032KBER100M5A
- IHLD4032KBER150M5A
- IHLD4032KBER220M5A
- IHLD4032KBER330M5A

APPLICATIONS



Class D audio amplifiers

