


**You're looking to optimise your design-in process**  
**Our online services open up opportunities**  
**Let's connect.**

OMNIMATE® device connectivity

*Compact  
catalog with  
webcodes*

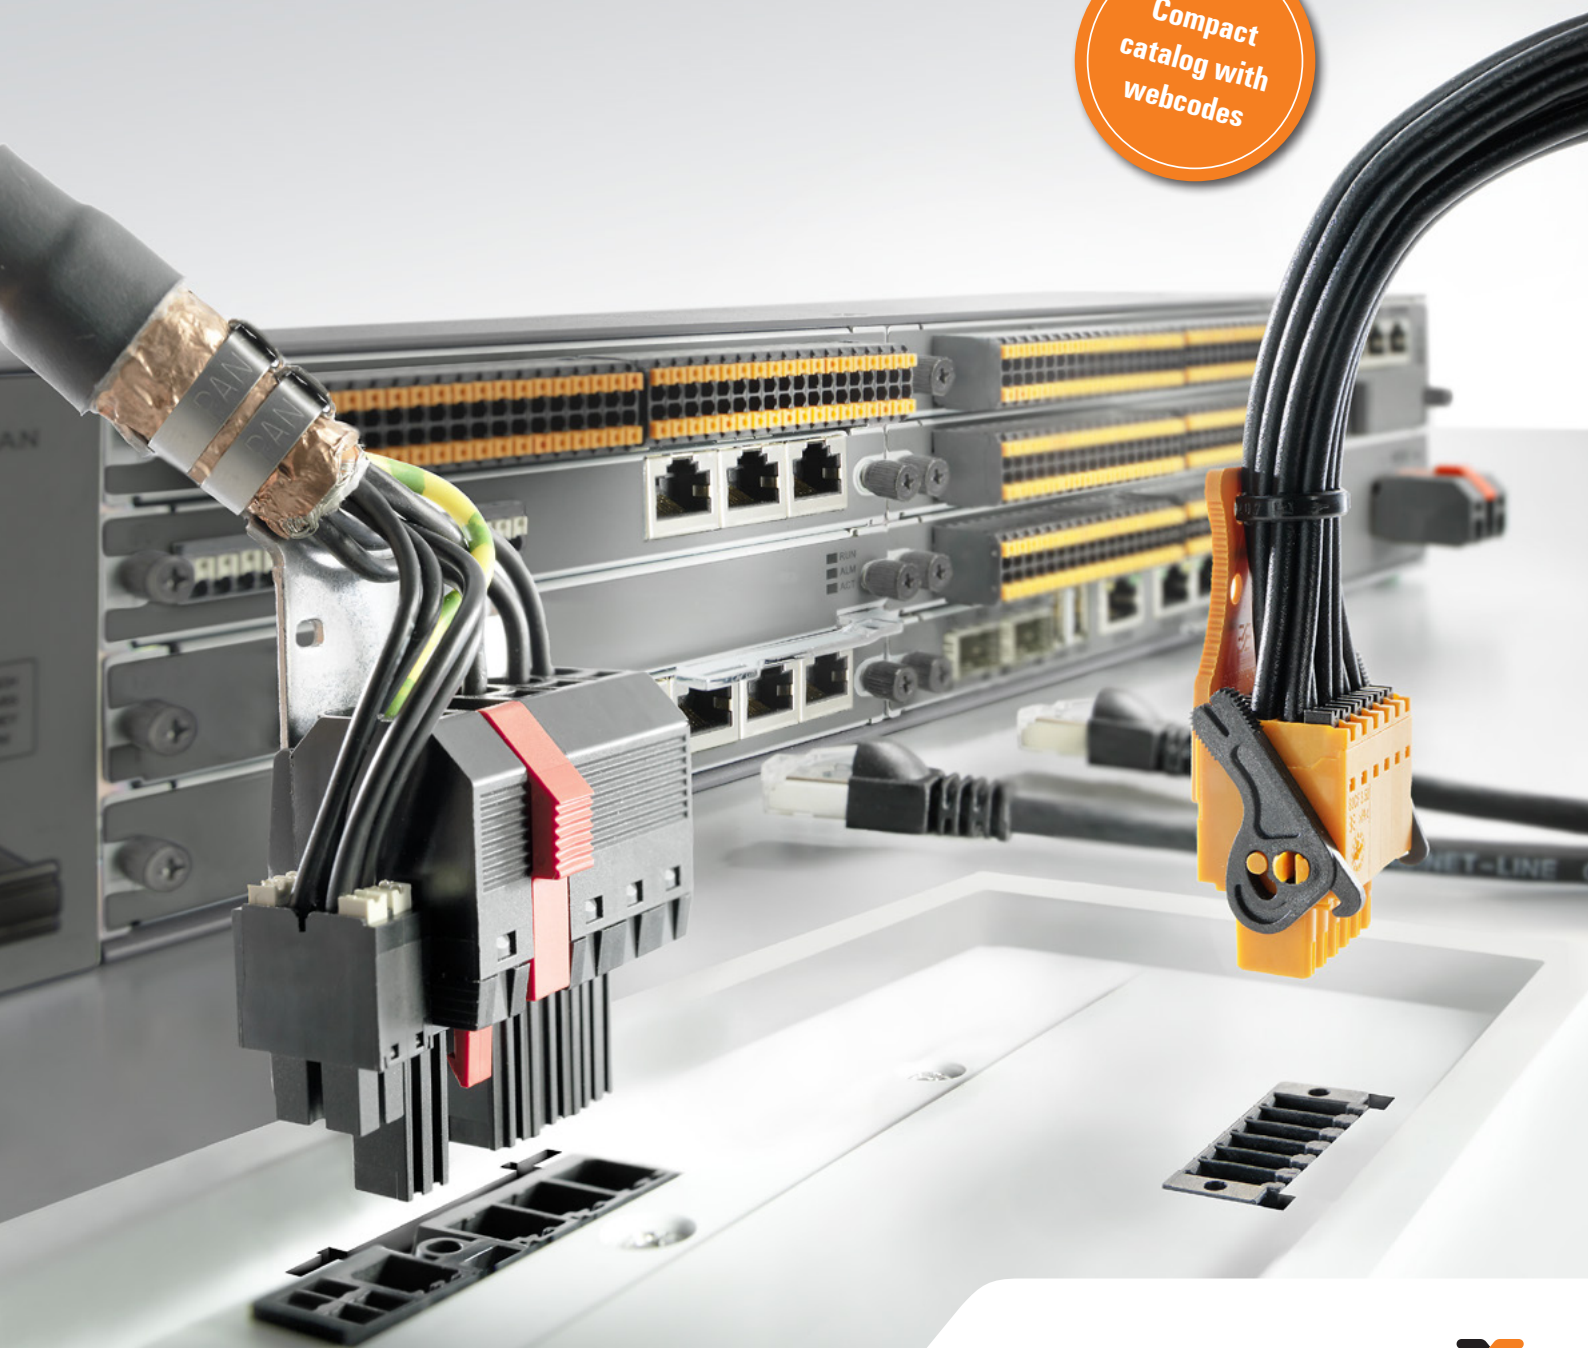

**Weidmüller** 

# The new Weidmüller online services

## The intelligent service concept for the design-in process

### Design-in at the pace of time

Your entire development process is computer-assisted; you can obtain internal data over the Intranet, or simply go online for your research and communication or to place orders. So why not make the most of new search paths and services independently of the catalogues? It's web-based, making it really simple and saving valuable time.

Weidmüller has fundamentally re-designed the selection and ordering process for device connectivity in a way that better suits your application. In the future, there'll no longer be just the one path to the right product; there'll just be the right path: yours. Let's connect.

## What you'll get from the new web-based service

### Increased range of selection options

Make the most of the full breadth and depth of our product and services range for PCBs and PCB device connectivity without missing a thing.

### Intuitive handling

All of our tools are self-explanatory and are also suitable for beginners.

### Excellent functionality

Discover the range of possibilities offered by practice-oriented tools and special functions, such as the counterpart selector that helps you find the right counterpart straight away.

### Simple navigation

With a clear overview and easy navigation through the different product categories, lists and tables.

### Vast array of options

Whether carrying out a restrictive or an expanded search, simply use the specification method nearest to you.

### Added value

Find exactly the right expertise, the most helpful support and the most reliable service to help you execute your project. 72-hour sample service included!

# Meet the newest member of our team: the webcode

## The hashtag for easy product searching



### What are webcodes?

A hashtag followed by five digits – that's all you need to find out detailed information about the products in our wide-ranging portfolio. Entering the sequence of characters activates certain product groups or an individual product.

#### Where can I find the webcode?

Next to the product, either in this brochure or online.

#### Where do I enter the webcode?

Just enter the code into the search screen on our website. \*)

#### Where will I be directed to once I've entered the webcode?

You'll be taken to the product specifications and technical details, as well as additional info and downloads.

\*) Note: Make sure that the pop-up blocker settings are disabled

# Four paths to the right product

## Our online services as process-optimisation tools

As a leading provider and pioneer in the field of device connectivity, Weidmüller supports the entire design-in process with deep-rooted application expertise and tried-and-tested problem-solving skills. Our intelligent service concept is designed to assist you on the way to a successful PCB and device design.

Our global design-in support provides the perfect connection between products and services, and your task is always the key focus. Take advantage of the benefits that strengthen your processes with one of our three paths to the right product.

There is more than one route to the final layout. Our support concept will assist you in all of your search and selection options.



**AppGuide**  
for device developers  
Wanted. Found. **Let's connect.**

Webcode #01171

### The AppGuide

When working with applications, you'll need to find ways of successfully implementing your ideas. Simply select your device application in our AppGuide, and we will recommend a range of products for all the different functions of your device.



Project Management

Selection Configuration Completion Request for quotation

Your product configurator for Device Connection Technology

Specify - select - combine - configure and save assembled components online! Please start with your selection.

PCB plug-in connector

PCB terminals

Male header Female plug Female header Male plug Terminals

Webcode #01169

### The product configurators

Your layout is ready and you know what components you want to use. Use the product configurator to quickly select device connectivity and housings and to adapt them according to your application's component specifications and requirements.



# Your device application

## Our AppGuide for device developers

Based on your application, the AppGuide will show you a representative range of products for the different functions of your device.

The overview will show you the application as you know it. Move the cursor over the markings to find out information on the connection technology for sub-assemblies and components. And it's just a few more clicks from here to your desired product.



# AppGuide

## for device developers

Wanted. Found. **Let's connect.**



### 1. Open the AppGuide

Go to:  
[www.weidmueller.com/AppGuide](http://www.weidmueller.com/AppGuide) or use  
the **Webcode #01171**

### 2. Select the application

Hotspots will show you the way  
to our recommended products

## Go directly to your application with the webcode



Industrial controls  
Webcode #01173



Drive controllers and regulators  
Webcode #01175



Devices of machine safety  
Webcode #01177



Analogue signal converter  
Webcode #01179



Photovoltaic inverter  
Webcode #01181



Power supply  
Webcode #01183



Radio base stations  
Webcode #01187



Heating electronics  
Webcode #01189



Building security equipment  
Webcode #01191




LED lighting systems  
Webcode #01195



Elevator electronics devices  
Webcode #01197


### Webcodes #

Simply enter the hashtag with five digits into the search screen on our website to find out more about your application and the matching products.

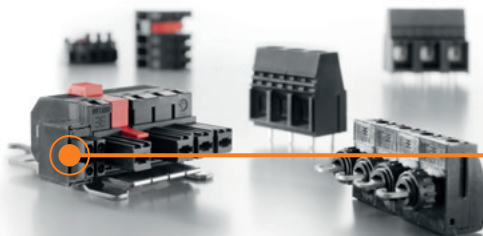

### 3. Select product group

Use the hotspots to find the perfect products for your applications



### 4. Receive the product


Configure your selection and use the available functions of our online catalogue.

# Your requirements for individual components

## Our product configurators for more design freedom

### Product configurator for device connection technology

Whenever you are looking for the right connection technology, the product configurator for device connection technology enables the quick selection and adaptation of terminals and plug connectors according to component specifications and application requirements.

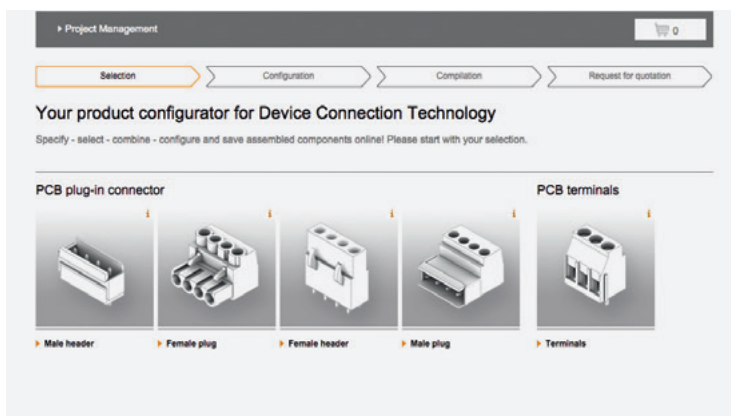

### Stored data packages


- Ordering data
- Dimensions and weights
- System specifications
- Material data
- Connection system data
- Rating and nominal data
- Classifications
- Approvals



Customised colours



Process-compatible packaging



Clear labelling




Application-oriented surfacing systems



Optimised pin lengths



Distinctive coding



Custom assembly



## Product configurator for electronic housings

Weidmüller's innovative CH20M housing system allows us to provide the best platform to fit your custom requirements – for whatever electronics application you are planning. Configure custom-fit housings according to your requirements from our line of connectivity, housing, and accessory components.

1 Width  
2 Length  
3 Height  
4 Type of connection  
5 Maximum number of connectors  
6 Number of PCBs per module

Selected components: 5

- OMNIMATE Housing - series CH20M Component housing Width 12.5 mm
- OMNIMATE Housing - series CH20M Component housing Width 17.5 mm
- OMNIMATE Housing - series CH20M Component housing Width 22.5 mm
- OMNIMATE Housing - series CH20M Component housing Width 45 mm
- OMNIMATE Housing - series CH20M Component housing Width 61.5 mm




Customised colours




Clear labelling




Custom assembly



Dimensions of the circuit board

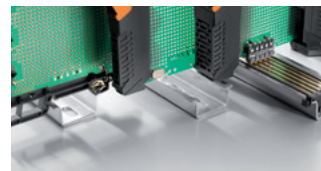

User-friendly mounting rail connection



Pin lengths optimized for the process



Process-compatible packaging


## OMNIMATE® Signal


Transmit numerous signals in the smallest possible space

A reliable device connection is an absolute must for your customised applications. With OMNIMATE® Signal, we can now offer you the right PCB-connection to meet your exact requirements.

You can choose from a product range that includes extremely compact PCB terminals and connectors, which, thanks to intelligent locking concepts and high-performance connection systems, provides your design-in process with a wide range of application-specific solutions and does not set any limits on your creativity.


We have also not forgotten about your production processes when formulating our product range, as our THR and SMD components ensure the highest productivity levels during the reflow soldering process.

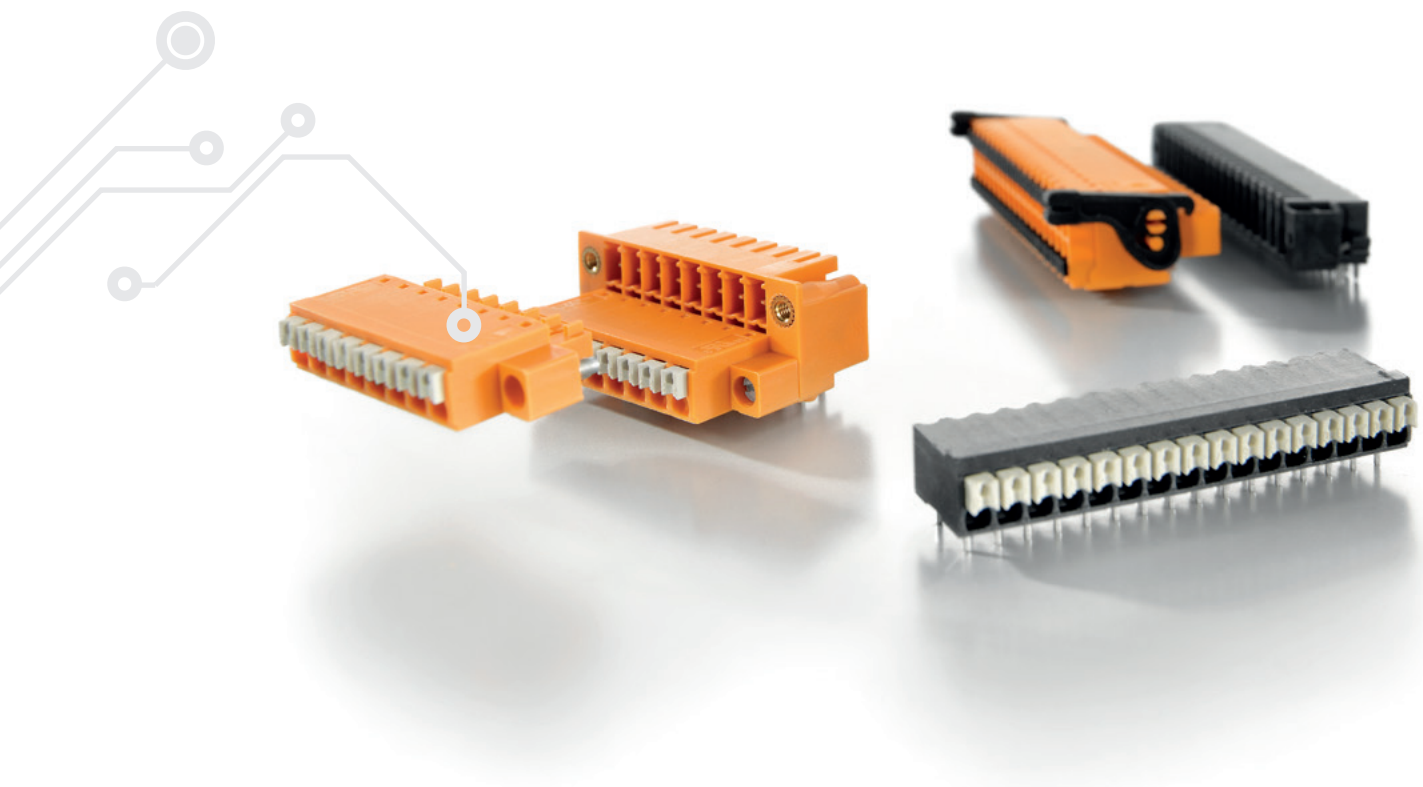

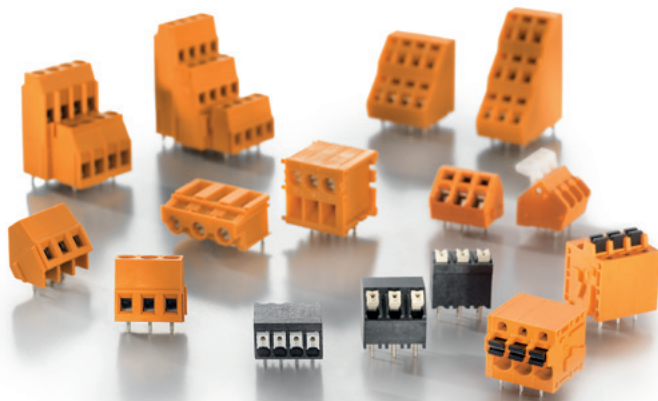

### OMNIMATE® Signal PCB terminals


- Application-oriented connection systems ranging from clamping yoke screw connections to PUSH IN spring connections in all relevant cross-section ranges up to 6 mm<sup>2</sup>
- Can be used universally in all standard pitches from 3.50 mm to 7.62 mm
- A wide range of reflow-compatible products for automated SMT processes
- Compact, multi-layer designs up to 72-pole

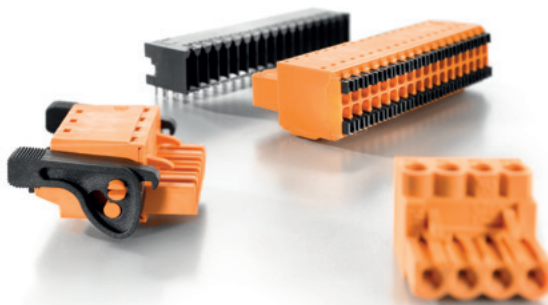

### OMNIMATE® Signal PCB plug-in connector

- 36 connections at 3.50 mm pitch, highest level of power reserves at 3.81 mm pitch and largest application area at 5.08 mm pitch
- Application-oriented connection systems ranging from clamping yoke screw connections to PUSH IN spring connections.
- A wide range of reflow-compatible products for automated SMT processes
- Multi-row and multi-layer designs up to 48-pole

**Clamping yoke screw connection**




Webcode #01011

**LM 3.5**

Small, compact PCB terminal with conductor outlet direction of 90° or 135°.

- Clamping yoke screw connection
- Pitch: 3.50 mm
- Number of poles: 2-12
- IEC: 320 V / 16 A / 0.2-1.5 mm<sup>2</sup>
- UL: 300 V / 10 A / AWG 28-14




Webcode #01013

**LM 5.00/5.08**

Single-row PCB terminal with conductor outlet direction of 90°, 135° and 180°.

- Clamping yoke screw connection
- Pitch: 5.00 mm / 5.08 mm
- Number of poles: 2-24
- IEC: 630 V / 17.5 A / 0.2-2.5 mm<sup>2</sup>
- UL: 300 V / 15 A / AWG 24-14




Webcode #01015

**LS 5.08**

Small, compact PCB terminal with conductor outlet direction of 90°.

- Clamping yoke screw connection
- Pitch: 5.08 mm
- Number of poles: 2-12
- IEC: 630 V / 17.5 A / 0.08-1.5 mm<sup>2</sup>
- UL: 300 V / 15 A / AWG 28-1




Webcode #01017

**LL 5.00/5.08**

Single-row PCB terminal with conductor outlet direction of 90°.

- Clamping yoke screw connection
- Pitch: 5.00 mm / 5.08 mm
- Number of poles: 2-24
- IEC: 500 V / 32.5 A / 0.5-6 mm<sup>2</sup>
- UL: 300 V / 20 A / AWG 28-12

**Clamping yoke screw connection**




Webcode #01019

**LL 9.52**

Single-row PCB terminal with conductor outlet direction of 90°.

- Clamping yoke screw connection
- Pitch: 9.52 mm
- Number of poles: 2-3
- IEC: 1000 V / 32 A / 0.18-6 mm<sup>2</sup>
- UL: 300 V / 30 A / AWG 26-1

**Leaf-spring screw connection**




Webcode #01021

**PS 3.5**

Very small and compact PCB terminal with conductor outlet direction of 90°.

- Leaf-spring screw connection
- Pitch: 3.50 mm
- Number of poles: 2-12
- IEC: 320 V / 17.5 A / 0.2-1.5 mm<sup>2</sup>
- UL: 300 V / 10 A / AWG 28 - AWG 16




Webcode #01023

**PM 5.00/5.08**

PCB terminal with conductor inlet direction of 90°.

- Leaf-spring screw connection
- Pitch: 5.00 mm / 5.08 mm
- Number of poles: 2-12
- IEC: 600 V / 24 A / 0.13-2.5 mm<sup>2</sup>
- UL: 300 V / 15 A / AWG 26-14

**TOP screw connection**




Webcode #01025

**TOP**

PCB terminal with conductor insertion and contact point actuation from the same direction.

- TOP screw connection
- Pitch: 5.08 mm
- Number of poles: 2-24
- IEC: 630 V / 24 A / 0.2-2.5 mm<sup>2</sup>
- UL: 300 V / 10 A / AWG 26-14

**PUSH IN spring connection**




Webcode #01027

**LS2HF 3.50**

Double-storey PCB terminal for wave soldering processes, with conductor insertion and slider operation from the same direction (TOP).

- PUSH IN spring connection
- Pitch: 3.50 mm
- Number of poles: 4-24
- IEC: 400 V / 10 A / 0.14-1.5 mm<sup>2</sup>
- UL: pending




Webcode #01029

**LSF-SMT 3.5 / 3.81**

PCB terminal for fully automatic assembly for THR reflow soldering (SMT) and wave soldering.

- PUSH IN spring connection
- Pitch: 3.50 mm / 3.81 mm
- Number of poles: 2-24
- IEC: 320 V / 17.5 A / 0.2-1.5 mm<sup>2</sup>
- UL: 300 V / 12 A / AWG 24-16




Webcode #01031

**LSF-SMT 5.00 / 5.08**

PCB terminal for fully automatic assembly for THR reflow soldering (SMT) and wave soldering.

- PUSH IN spring connection
- Pitch: 5.00 mm / 5.08 mm
- Number of poles: 2-8
- IEC: 500 V / 17.5 A / 0.2-1.5 mm<sup>2</sup>
- UL: 300 V / 12 A / AWG 24-16



Webcode #01033


**LSF-SMT 7.50 / 7.62**

PCB terminal for fully automatic assembly for THR reflow soldering (SMT) and wave soldering.

- PUSH IN spring connection
- Pitch: 7.50 mm / 7.62 mm
- Number of poles: 2-8
- IEC: 800 V / 17.5 A / 0.2-1.5 mm<sup>2</sup>
- UL: 300 V / 12 A / AWG 24-16

## OMNIMATE® Signal – PCB terminals

### PUSH IN spring connection




Webcode #01035

#### LSF-SMD 3.5

PCB terminal for fully automatic assembly for reflow soldering (SMT).

- PUSH IN spring connection
- Pitch: 3.50 mm
- Number of poles: 2-12
- IEC: 320 V / 17.5 A / 0.2-1.5 mm<sup>2</sup>
- UL: 300 V / 12 A / AWG 24-16




Webcode #01037

#### LSF-SMD 5.00

PCB terminal for fully automatic assembly for reflow soldering (SMT).

- PUSH IN spring connection
- Pitch: 5.00 mm
- Number of poles: 2-8
- IEC: 500 V / 17.5 A / 0.2-1.5 mm<sup>2</sup>
- UL: 300 V / 12 A / AWG 24-16




Webcode #01039

#### LSF-SMD 7.50

PCB terminal for fully automatic assembly for reflow soldering (SMT).

- PUSH IN spring connection
- Pitch: 7.50 mm
- Number of poles: 2-6
- IEC: 800 V / 17.5 A / 0.2-1.5 mm<sup>2</sup>
- UL: 300 V / 12 A / AWG 24-16

### PUSH IN spring connection




Webcode #01041

#### LMF 5.00/5.08

PCB terminal with pusher for opening the contact point and an integrated test point.

- PUSH IN spring connection
- Pitch: 5.00 mm / 5.08 mm
- Number of poles: 2-24
- IEC: 400 V / 24 A / 0.2-2.5 mm<sup>2</sup>
- UL: 300 V / 10 A / AWG 26-12



Webcode #01043


#### LMFS 5.00/5.08

PCB terminal without pusher; contact point can be opened using a screwdriver and integrated test point.

- PUSH IN spring connection
- Pitch: 5.00 mm / 5.08 mm
- Number of poles: 2-24
- IEC: 400 V / 24 A / 0.2-2.5 mm<sup>2</sup>
- UL: 300 V / 10 A / AWG 26-12

## OMNIMATE® Signal – PCB connectors

### 2.50




Webcode #11340

#### BLF 2.50

Female plug for conductor connection with PUSH IN spring connection.

- PUSH IN spring connection
- Pitch: 2.50 mm
- Number of poles: 2-12
- IEC: 320 V / 6 A / 0.08 - 0.5 mm<sup>2</sup>
- UL: 150 V / 5 A / AWG 28 - 20




Webcode #11341

#### SL 2.50

Male header for wave soldering methods for 2.50 mm pitch.

- Male header
- Pitch: 2.50 mm
- Number of poles: 2-12
- IEC: 320 V / 6 A
- UL: 320 V / 6 A

### 3.50 double-row design



Webcode #01059

#### B2CF 3.50


Compact double-row female plug with maximum connection density within an extremely small space.

- PUSH IN spring connection
- Pitch: 3.50 mm
- Number of poles: 4-36
- IEC: 320 V / 13.4 A / 0.14-1.5 mm<sup>2</sup>
- UL: 300 V / 9.5 A / AWG 26-16


## Support for each step of your design-in process

Your design process is ambitious and really complex. You need to be able to insert as much reliable information as possible directly into your planning tool. Use our support service for every aspect of your design-in management. Choose from the following services:

- Data sheets
- CAD models
- EDA library
- Handling videos
- Counterpart selector

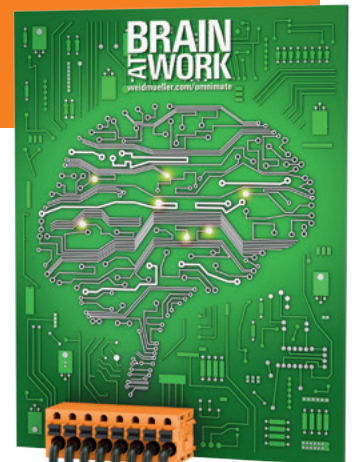

3.50 double-row design




Webcode #01061

**S2C 3.50**

High-temperature-resistant, double-row male header for reflow and wave soldering methods.

- Male header
- Pitch: 3.50 mm
- Number of poles: 4–36
- IEC: 200 V / 13.4 A
- UL: 150 V / 10 A




Webcode #01063

**S2L 3.50**

Double-row male header for wave soldering methods.

- Male header
- Pitch: 3.50 mm
- Number of poles: 6–36
- IEC: 250 V / 10 A
- UL: 150 V / 10 A

3.50




Webcode #01067

**BL 3.50**

Female plug for conductor connection with clamping yoke screw connection.

- Clamping yoke screw connection
- Pitch: 3.50 mm
- Number of poles: 2–24
- IEC: 320 V / 17 A / 0.2–1.5 mm<sup>2</sup>
- UL: 300 V / 10 A / AWG 28–14




Webcode #01071

**BLZF 3.5**

Female plug for conductor connection with tension-clamp connection system.

- Tension-clamp system
- Pitch: 3.50 mm
- Number of poles: 2–24
- IEC: 320 V / 14.5 A / 0.2–1.5 mm<sup>2</sup>
- UL: 300 V / 10 A / AWG 26–14

3.50




Webcode #01069

**SL-SMT 3.50**

High-temperature-resistant male header for reflow and wave soldering methods.

- Male header
- Pitch: 3.50 mm
- Number of poles: 2–24
- IEC: 320 V / 15 A
- UL: 300 V / 10 A




Webcode #01073

**SL 3.50**

Male header for wave soldering methods.

- Male header
- Pitch: 3.50 mm
- Number of poles: 2–24
- IEC: 320 V / 17 A
- UL: 300 V / 10 A




Webcode #01065

**BL-I/O 3.5**

Extremely compact female plug in one or three-row design and with an integrated LED display.

- PUSH IN spring connection
- Pitch: 3.50 mm
- Number of poles: 10–30
- IEC: 200 V / 2.2 A / 0.2–1 mm<sup>2</sup>
- UL: 50 V / 5 A / AWG 24–16

3.81




Webcode #01075

**BCZ 3.81**

Compact female plug for conductor connection with clamping yoke screw connection.

- Clamping yoke screw connection
- Pitch: 3.81 mm
- Number of poles: 2–20
- IEC: 320 V / 17.5 A / 0.14–1.5 mm<sup>2</sup>
- UL: 300 V / 10 A / AWG 28–16

3.81




Webcode #01079

**BCF 3.81**

Female plug with very low profile for conductor connection with PUSH IN spring connection.

- PUSH IN spring connection
- Pitch: 3.81 mm
- Number of poles: 2–18
- IEC: 320 V / 17.5 A / 0.2–1.5 mm<sup>2</sup>
- UL: 300 V / 10 A / AWG 28–16




Webcode #01083

**BCL-SMT 3.81**

High-temperature-resistant female header with a very low profile for reflow soldering methods.

- Female header
- Pitch: 3.81 mm
- Number of poles: 2–12
- IEC: 320 V / 17.5 A
- UL: 300 V / 10 A




Webcode #01077

**SC-SMT 3.81**

High-temperature-resistant male header with a very low profile for reflow and wave soldering methods.

- Male header
- Pitch: 3.81 mm
- Number of poles: 2–16
- IEC: 320 V / 17.5 A
- UL: 300 V / 10 A




Webcode #11333

**SCZ 3.81**

Compact male plug for conductor connection with clamping yoke screw connection.

- Clamping yoke screw connection
- Pitch: 3.81 mm
- Number of poles: 2–12
- IEC: 320 V / 17.5 A / 0.14–1.5 mm<sup>2</sup>
- UL: 300 V / 10 A / AWG 28–16

3.81




Webcode #01081

**SC 3.81**

Male header with a very low profile for wave soldering methods.

- Male header
- Pitch: 3.81 mm
- Number of poles: 2–20
- IEC: 320 V / 17.5 A
- UL: 300 V / 10 A

5.08




Webcode #01085

**BLZP 5.08HC**

High-current female plug for conductor connection with 90°, 180° to 225° and 270° outlet direction.

- Clamping yoke screw connection
- Pitch: 5.08 mm
- Number of poles: 2–24
- IEC: 400 V / 23 A / 0.2–4 mm<sup>2</sup>
- UL: 300 V / 20 A / AWG 30–12




Webcode #01093

**BLT 5.08HC**

High-current female plug for conductor connection with a straight 180° outlet direction and space for labelling.

- TOP screw connection
- Pitch: 5.08 mm
- Number of poles: 2–24
- IEC: 400 V / 27 A / 0.2–2.5 mm<sup>2</sup>
- UL: 300 V / 17 A / AWG 26–14




Webcode #01089

**BLF 5.08HC**

Compact high-current female plug for conductor outlet directions of 90° to 180° and 270°.

- PUSH IN spring connection
- Pitch: 5.08 mm
- Number of poles: 2–24
- IEC: 400 V / 24 A / 0.2–2.5 mm<sup>2</sup>
- UL: 300 V / 18.5 A / AWG 26–12

5.08




Webcode #01097

**BLC 5.08**

Female plug to allow for the pre-assembly of wiring harnesses in large quantities.

- Crimp connection system
- Pitch: 5.08 mm
- Number of poles: 2–16
- IEC: 400 V / 21 A
- UL: 300 V / 10 A / AWG 26–14




Webcode #01101

**BLL 5.08**

Female header for PCB assembly with 90° and 180° outlet direction and optimised solder pin length for wave soldering methods.

- Female header
- Pitch: 5.08 mm
- Number of poles: 2–24
- IEC: 400 V / 23 A
- UL: 300 V / 15 A




Webcode #01091

**SL-SMT 5.08HC**

Highly temperature-resistant angled male header optimised for automatic assembly and for reflow and wave soldering methods.

- Male header
- Pitch: 5.08 mm
- Number of poles: 2–24
- IEC: 400 V / 27.5 A
- UL: 300 V / 18.5 A




Webcode #01095

**SL 5.08HC**

Male headers in glass-fibre-reinforced plastic, optimised for wave soldering methods.

- Male header
- Pitch: 5.08 mm
- Number of poles: 2–24
- IEC: 400 V / 24 A
- UL: 300 V / 18.5 A

5.08




Webcode #01103

**SLT 5.08**

Male plugs with straight outlet direction provide space for labelling and can be coded.

- TOP screw connection system
- Pitch: 5.08 mm
- Number of poles: 2–16
- IEC: 400 V / 16 A / 0.2–2.5 mm<sup>2</sup>
- UL: 300 V / 15 A / AWG 26–14




Webcode #01099

**SLF 5.08**

Male plugs with straight outlet direction provide space for labelling and can be coded.

- PUSH IN spring connection
- Pitch: 5.08 mm
- Number of poles: 2–12
- IEC: 400 V / 25.9 A / 0.2–2.5 mm<sup>2</sup>
- UL: 300 V / 14 A / AWG 26–12

Rectangular connector




Webcode #11361

**RSV 1.6 C**

Rectangular connector for a high component density, for use as a free coupling or a PCB variant.

- Crimp connection system
- Pitch: 5.00 mm
- Number of poles: 4–36
- IEC: 630 V / 17 A
- UL: 600 V / 10 A / AWG 26–12



Webcode #01107

**RSV 1.6 L**

Rectangular connector with solder pin and solder socket contacts for PCB applications.

- Solder pin contacts
- Pitch: 5.00 mm
- Number of poles: 4–36
- IEC: 500 V / 14 A
- UL: 300 V / 10 A


## OMNIMATE® Power

### Powerful connections with maximum security


New products and innovations help to shake up the market. Many power electronics applications are constantly evolving at a rapid pace, causing the requirements placed on connection systems to increase as well.

As specialists with a great deal of practical experience, we know the maximum power and security requirements that you place on your electronic devices. Our high-performance PCB terminals, PCB connectors and panel feedthrough terminal blocks therefore also comply with applicable device standards such as the IEC 61800 standard for speed-controlled drive technology.

Our Power products also fully achieve 600 volts in accordance with UL standards. The range is rounded off by application-specific connectors for motor connections with shield support.

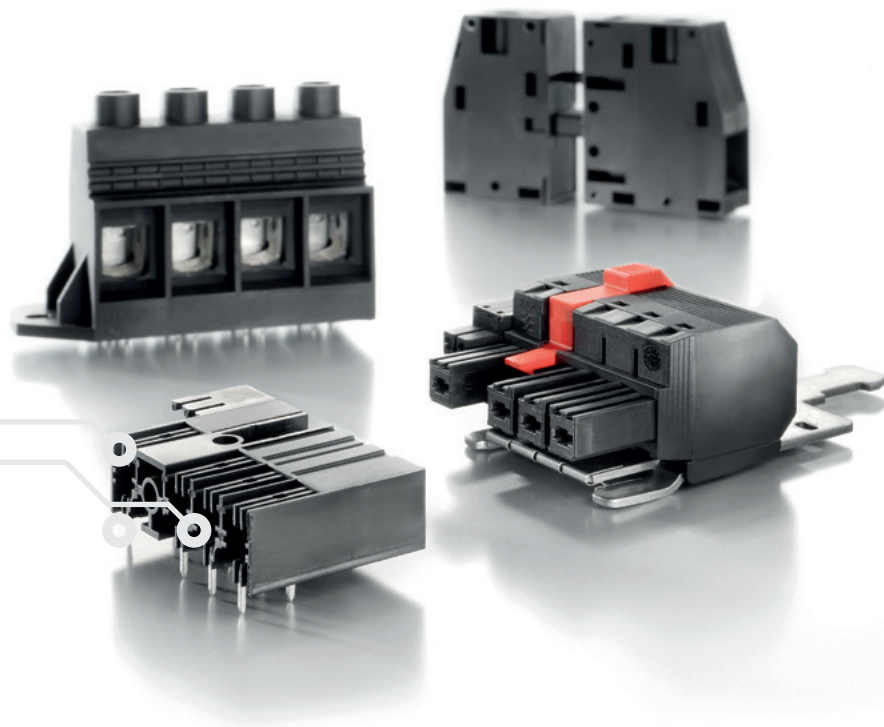




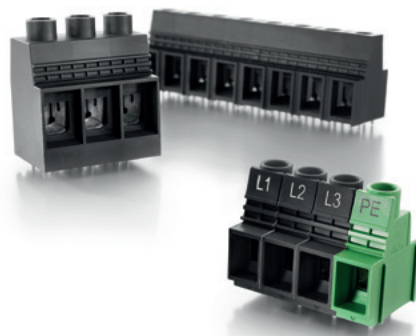

### OMNIMATE® Power PCB terminals

600 V  
cUL US


- High-power to 150 A / 1000 V (IEC) or 127 A / 600 V (UL)
- Application-oriented scalability with connection cross-sections from 16 mm<sup>2</sup> to 50 mm<sup>2</sup>
- Simple UL device approval up to 600 V
- Maintenance-free steel clamping yoke for vibration-resistant screw connections

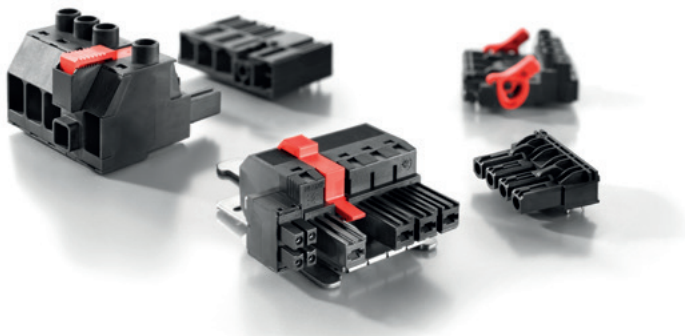

### OMNIMATE® Power PCB plug-in connectors

600 V  
cUL US

- Application-oriented scalability: from the compact 4 mm<sup>2</sup> connector for 29 A (IEC) or 20 A (UL) up to the sturdy 16 mm<sup>2</sup> connector for 76 A (IEC) or 60 A (UL)
- Unlimited usage up to 1000 V (IEC) or 600 V (UL)
- A variety of application-optimised mounting options

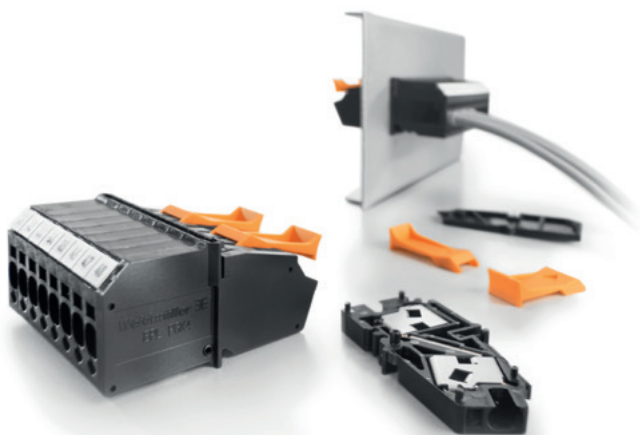


### OMNIMATE® Power panel feedthrough terminal blocks

- Clamping yoke screw connection
- PUSH IN connection
- Wall and housing feedthrough
- Simple, flexible and cost-saving assembly and connection of conductors
- Cable lug
- Solder connection

## OMNIMATE® Power PCB terminals

### PUSH IN spring connection




Webcode #01047

#### LUF 10.00

Sturdy direct connection to meet the most stringent current and voltage requirements in all power electronics applications.

- PUSH IN spring connection
- Pitch: 10.00 mm
- Number of poles: 2-8
- IEC: 800 V / 76 A / 0.5-16 mm<sup>2</sup>
- UL: 600 V / 58 A / AWG 18-6

### Clamping yoke screw connection




Webcode #01045

#### LL 6.35

High-performance PCB terminal with offset solder pins and conductor outlet direction of 90°.

- Clamping yoke screw connection
- Pitch: 6.35 mm
- Number of poles: 2-12
- IEC: 1000 V / 32 A / 0.18-6 mm<sup>2</sup>
- UL: 600 V / 30 A / AWG 26-10




Webcode #01049

#### LU 10.16

High-performance PCB terminal with offset solder pins and conductor outlet direction of 90°.

- Clamping yoke screw connection
- Pitch: 10.16 mm
- Number of poles: 2-10
- IEC: 1000 V / 76 A / 0.5-16 mm<sup>2</sup>
- UL: 300 V / 65 A / AWG 26-6




Webcode #01051

#### LUP 10.16 V with test point

High-performance PCB terminal with integrated test point and conductor outlet direction of 90°.

- Clamping yoke screw connection
- Pitch: 10.16 mm
- Number of poles: 2-9
- IEC: 1000 V / 76 A / 0.5-16 mm<sup>2</sup>
- UL: 600 V / 51 A / AWG 26-6

### Clamping yoke screw connection




Webcode #01053

#### LUP 12.70 with test point

High-performance PCB terminal with integrated test point and conductor outlet direction of 90°.

- Clamping yoke screw connection
- Pitch: 12.70 mm
- Number of poles: 2-9
- IEC: 1000 V / 76 A / 0.5-16 mm<sup>2</sup>
- UL: 600 V / 58 A / AWG 26-6




Webcode #01055

#### LX 15.00 with test point

High-performance PCB terminal with integrated test point and conductor outlet direction of 90°.

- Clamping yoke screw connection
- Pitch: 15.00 mm
- Number of poles: 1-9
- IEC: 1000 V / 101 A / 1.5-25 mm<sup>2</sup>
- UL: 600 V / 85 A / AWG 16-4



Webcode #01057


#### LXXX 15.00 with test point

High-performance PCB terminal with integrated test point and conductor outlet direction of 90°.

- Clamping yoke screw connection
- Pitch: 15.00 mm
- Number of poles: 1-9
- IEC: 1000 V / 150 A / 0.5-50 mm<sup>2</sup>
- UL: 600 V / 127 A / AWG 20-1

## OMNIMATE® Power – PCB connectors

### Hybrid




Webcode #01111

#### BVF 7.62HP hybrid

Hybrid female plug – the perfect 2-in-1 solution for the simultaneous combination of energy and signals. Available with plug-in EMC shield support on request.

- PUSH IN spring connection
- Pitch: 7.62 mm
- Pole count: 2/4-5/8
- IEC: 1000 V / 38 A / 0.5-10 mm<sup>2</sup>
- UL: 600 V / 35 A / AWG 24-8




Webcode #01113

#### SV 7.62 hybrid

Hybrid male header with energy and signal contacts.

- Male header
- Pitch: 7.62 mm
- Pole count: 2/4-5/8
- IEC: 1000 V / 41 A
- UL: 300 V / 35 A

### IT




Webcode #01115

#### BLZ 7.62IT

Female plug with 180° outlet direction and touch safety for IT networks with self-locking centre flange.

- Clamping yoke screw connection
- Pitch: 7.62 mm
- Number of poles: 2-6
- IEC: 1000 V / 41 A / 0.2-6 mm<sup>2</sup>
- UL: 600 V / 40.5 A / AWG 24-8




Webcode #01117

#### SL 7.62IT

Male header with optional solder flange attachment and with leading contact for computer networks.


- Male header
- Pitch: 7.62 mm
- Number of poles: 2-6
- IEC: 630 V / 29 A
- UL: 300 V / 20 A

IT




**BVZ 7.62IT**  
Female plug with 180° outlet direction and touch safety for IT networks with self-locking centre flange.

- Clamping yoke screw connection
- Pitch: 7.62 mm
- Number of poles: 2-4
- IEC: 1000 V / 41 A / 0.2-6 mm<sup>2</sup>
- UL: 600 V / 40.5 A / AWG 24-8




**SV 7.62IT**  
Male header with optional solder flange attachment and with leading contact for computer networks.

- Male header
- Pitch: 7.62 mm
- Number of poles: 2-4
- IEC: 1000 V / 41 A
- UL: 300 V / 40.5 A



**BUZ 10.16IT**  
Female plug with 180° outlet direction and touch safety for IT networks with self-locking centre flange.


- Clamping yoke screw connection
- Pitch: 10.16 mm
- Number of poles: 2-4
- IEC: 1000 V / 78 A / 0.2-16 mm<sup>2</sup>
- UL: 300 V / 60 A / AWG 22-4



**SU 10.16IT**  
Male header with optional solder flange attachment and with leading contact for computer networks.


- Male header
- Pitch: 10.16 mm
- Number of poles: 2-4
- IEC: 1000 V / 76 A
- UL: 300 V / 60 A

7.62




**BLZ 7.62HP**  
Female plug with single compartment mating profile with 180° outlet direction and touch protection for HP networks.

- Clamping yoke screw connection
- Pitch: 7.62 mm
- Number of poles: 2-12
- IEC: 630 V / 29 A / 0.2-4 mm<sup>2</sup>
- UL: 600 V / 20 A / AWG 20-12




**BLF 7.62HP**  
Female plug with single compartment mating profile with 180° outlet direction and touch protection for HP networks.

- PUSH IN spring connection
- Pitch: 7.62 mm
- Number of poles: 2-12
- IEC: 1000 V / 24 A / 0.5-2.5 mm<sup>2</sup>
- UL: 600 V / 20 A / AWG 20-12




**SL 7.62HP**  
Male header with single compartment mating profile and touch protection.

- Male header
- Pitch: 7.62 mm
- Number of poles: 2-12
- IEC: 630 V / 29 A
- UL: 300 V / 20 A




**SLZ 7.62HP**  
Male plug with single compartment mating profile with 180° outlet direction as touch-safe solution for the reverse voltage in HP networks.

- Clamping yoke screw connection
- Pitch: 7.62 mm
- Number of poles: 2-5
- IEC: 1000 V / 20 A / 0.5-2.5 mm<sup>2</sup>
- UL: 600 V / 17 A / AWG 20-12



**SLF 7.62HP**  
Male plug with single compartment mating profile with 180° outlet direction as touch-safe solution for the reverse voltage in HP networks.


- PUSH IN spring connection
- Pitch: 7.62 mm
- Number of poles: 2-5
- IEC: 1000 V / 24 A / 0.5-2.5 mm<sup>2</sup>
- UL: 600 V / 20 A / AWG 20-12



**BLL 7.62HP**  
Touch-safe female header with single compartment mating profile for the PCB with one-hand safety interlock.


- Female header
- Pitch: 7.62 mm
- Number of poles: 2-5
- IEC: 630 V / 24 A
- UL: 300 V / 20 A

7.62




**BVZ 7.62HP**  
High-performance female plug for pole-loss-safe attachment or for use with patented multi-function flanges for TNC(S) networks.

- Clamping yoke screw connection
- Pitch: 7.62 mm
- Number of poles: 2-12
- IEC: 1000 V / 41 A / 0.2-6 mm<sup>2</sup>
- UL: 600 V / 40.5 A / AWG 24-8




**BVF 7.62HP**  
High-performance female plug with 180° outlet direction as a touch-safe solution for the power output for TNC(S) networks.

- PUSH IN spring connection
- Pitch: 7.62 mm
- Number of poles: 2-5
- IEC: 1000 V / 41 A / 0.5-10 mm<sup>2</sup>
- UL: 600 V / 35 A / AWG 24-8




**SV 7.62HP**  
High-performance single-row male header for pole-loss-safe attachment or for use with patented multi-function flanges for TNC(S) networks.

- Male header
- Pitch: 7.62 mm
- Number of poles: 2-12
- IEC: 1000 V / 41 A
- UL: 300 V / 40.5 A




**SVZ 7.62HP**  
High-performance male plug for pole-loss-safe attachment or for use with patented multi-function flanges for TNC(S) networks.

- Clamping yoke screw connection
- Pitch: 7.62 mm
- Number of poles: 2-7
- IEC: 1000 V / 41 A / 0.2-6 mm<sup>2</sup>
- UL: 600 V / 35 A / AWG 24-10



**SVF 7.62HP**  
High-performance male plug with 180° outlet direction as a three-flange version for the housing feedthrough for TNC(S) networks.


- PUSH IN spring connection
- Pitch: 7.62 mm
- Number of poles: 2-6
- IEC: 1000 V / 41 A / 0.5-10 mm<sup>2</sup>
- UL: 600 V / 35 A / AWG 24-10



**BVL 7.62HP**  
High-performance female header for pole-loss-safe attachment or for use with patented multi-function flanges for TNC(S) networks.


- Female header
- Pitch: 7.62 mm
- Number of poles: 2-7
- IEC: 1000 V / 41 A
- UL: 300 V / 35 A

10.16



**BUZ 10.16HP**  
High-performance female plug with 180° outlet direction for pole-loss-safe attachment or for use with patented multi-function flanges for TNC(S) networks.

- Clamping yoke screw connection
- Pitch: 10.16 mm
- Number of poles: 2-9
- IEC: 1000 V / 78 A / 0.2-16 mm<sup>2</sup>
- UL: 600 V / 60 A / AWG 22-4




**SU 10.16HP**  
High-performance single-row male header for pole-loss-safe attachment or for use with patented multi-function flanges for TNC(S) networks.

- Male header
- Pitch: 10.16 mm
- Number of poles: 2-9
- IEC: 1000 V / 76 A
- UL: 300 V / 60 A

## OMNIMATE® Power – PCB connectors

10.16




Webcode #01155

### SUZ 10.16HP

High-performance male plug with 180° outlet direction and high-strength contact system for TNC(S) networks.

- Clamping yoke screw connection
- Pitch: 10.16 mm
- Number of poles: 2-9
- IEC: 1000 V / 78 A / 0.2-16 mm<sup>2</sup>
- UL: 600 V / 54 A / AWG 24-6



Webcode #01157

### BUL 10.16HP

High-performance female header with 180° outlet direction and high-strength contact system for TNC(S) networks.

- Female header
- Pitch: 10.16 mm
- Number of poles: 2-4
- IEC: 1000 V / 76 A
- UL: 300 V / 57 A

## OMNIMATE® Power – Feed-through terminals




Webcode #01159

### PGK

Device feedthrough terminal blocks with disc design and intuitive locking for a quick and compact solution.

- PUSH IN spring connection
- Connection cross-section: up to 4 mm<sup>2</sup>
- IEC: 500 V / 32 A / 0.5-4 mm<sup>2</sup>
- UL: 300 V / 30 A / AWG 24-10



Webcode #01161

### WGK

High-current feed-through terminals as a universal solution to guide currents of various scales through the device wall.

- Clamping yoke screw connection
- Connection cross-section: 4 to 95 mm<sup>2</sup>
- IEC: 1000 V / 232 A / 0.5-95 mm<sup>2</sup>
- UL: 600 V / 230 A / AWG 24-4/0


## 72-hour sample service Design-in samples delivered to any location

With PCB and device designs, there always comes a point at which design engineers need to find exactly the right connection for their application. Just order your design-in samples, quickly and easily. Make the most of the free 72-hour sample service for OMNIMATE®:

1. Select your required sample from the online catalogue
2. Check your enquiry list
3. Enter your contact details and complete your order

You'll receive your OMNIMATE® product samples free of charge within 72 hours.

Webcode #01163

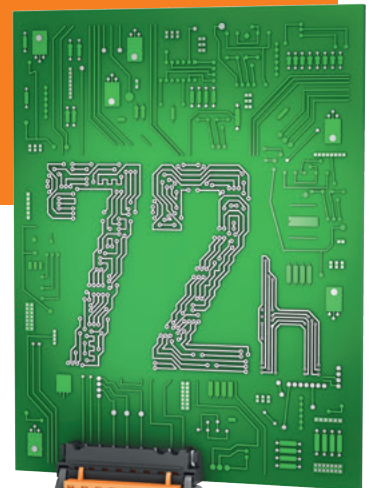

# OMNIMATE® Data


## Reliable data interfaces for your device

Plug-in connectors and sockets for data transmission are already an integral part of the future-proof device design. In the industrial environment, they have to stand up to exacting requirements and the ever-increasing data transmission rates demand high-quality on individual components.

The Weidmüller data connectors and sockets provide impressive solutions to this challenge, as they ensure a secure and efficient interface to your device.

The fully shielded product range boasts high levels of electromagnetic compatibility, caters to all established outlet angles, and includes latching hooks on the top and bottom as well as an innovative connection system for an industry-standard design.

Benefit from using our coordinated and high-performance components and a wide range of potential applications.

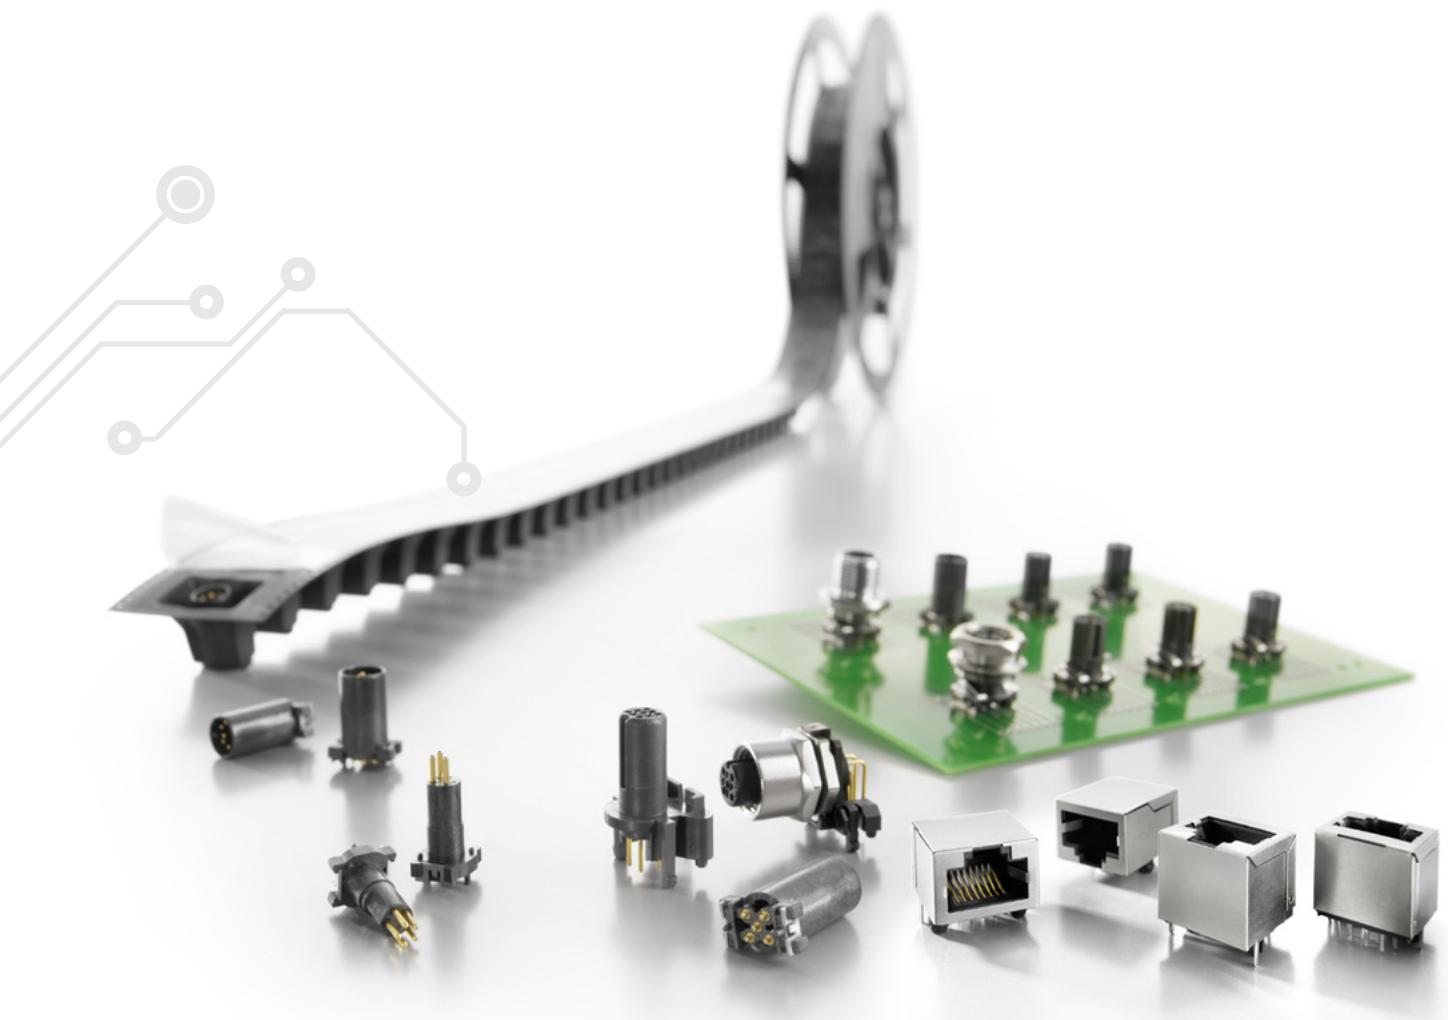



**OMNIMATE® Data  
RJ45 PCB sockets and plug-in  
connectors**

- Future-proof transmission properties thanks to the Cat. 5 to 6<sub>A</sub> standard for data transmission rates of up to 10 Gbit/s
- Electromagnetic compatibility and protection thanks to 360° shielding
- Integrated compensation (magnetic) counteracts induct and capacitive couplings and saves space on the PCB




**OMNIMATE® Data  
M8 and M12 PCB sockets**

- Variety of different designs
- Automatic assembly or individually mountable
- Different installation options
- Several codings: A, B, D, X
- Modular assembly by separation of insert and housing
- Wide range of plug-in connectors and moulded cables




PCB socket




**RJ45 solder connection (SMD)**  
PCB socket for reflow soldering process (SMT)

- PCB socket, 8-pole
- Outlet direction: 90° and 180°
- Category: Cat.5
- Plugging cycles: 750
- Fastening mechanism: top and bottom




**RJ45 solder connection (THT)**  
PCB socket for reflow (THR) and wave soldering process.

- PCB socket, 8-pole
- Outlet direction: 90° and 180°
- Category: Cat.5 and 6
- Plugging cycles: 750
- Fastening mechanism: top and bottom



**RJ45 solder connection (THT)**  
PCB socket for the reflow (THR) and wave soldering process with integrated magnetics.

- PCB socket, 8-pole
- Outlet direction: 90° and 180°
- Category: Cat.5 and 6
- Plugging cycles: 750



**RJ45 solder connection (THT) Duo**  
PCB socket for reflow (THR) and wave soldering process with integrated magnetics.

- PCB socket, 8-pole
- Outlet direction: 90°
- Category: Cat.5 and 6
- Plugging cycles: 750

Plug-in connectors



**RJ45 connector „steadytec“**  
Tool-free and field-attachable plug for Industrial Ethernet

- IDC connection, 4-8-core
- Outlet direction: 180°
- Category: Cat.5 and Cat.6<sub>A</sub>
- AWG 26...AWG 22 / 0.48...0.76 mm<sup>2</sup>



**RJ45 connector**  
Tool-free and field-attachable plug for Industrial Ethernet

- Pierce connection, 4-8-core
- Outlet direction: 90° and 180°
- Category: Cat.5 and Cat.6<sub>A</sub>
- AWG 27...AWG 24 / 0.46...0.61 mm<sup>2</sup>

Patch cable



**RJ45 patch cable**  
Freely configurable RJ45 cable in a wide range of colours

- Protected latching hook, 8-core
- Outlet direction: 90°, 180° and 270°
- Category: Cat.6<sub>A</sub>

USB 3.0



**USB 3.0 solder connection (THT)**  
PCB socket type A for the reflow (THR) and wave soldering process

- Downward compatible, 10 pole
- Outlet direction: 180°
- Data rate: up to 5Gbit/s
- Plugging cycles: 1500



## OMNIMATE® Data – M8 and M12 PCB sockets

### M8




Webcode # 11365

#### M8 Dome (individual part)

PCB circular connector for automatic assembly and M8 threads.

- Number of poles: 3, 4, 8
- Female and male contact
- SMT, THR
- Shielded and unshielded




Webcode # 11367

#### M8 Front mounting

PCB circular connector with M8 thread for front mounting.

- Number of poles: 3, 4, 8
- Female and male contact
- Outlet direction: 180°
- Shielded and unshielded



Webcode # 11369

#### M8 Rear panel mounting

PCB circular connector with M8 thread for rear panel mounting.

- Number of poles: 3, 4, 8
- Female and male contact
- Outlet direction: 90°, 180°
- Shielded and unshielded

### M12




Webcode # 11353

#### M12 Dome (individual part)

PCB circular connector for automatic assembly and M12 threads.

- Number of poles: 4, 5, 8
- Female and male contact
- SMT
- Shielded and unshielded
- Coding: A, B, D




Webcode # 11355

#### M12 Front mounting

PCB circular connector with M12 thread for front mounting.

- Number of poles: 4, 5, 8
- Female and male contact
- Outlet direction: 90°, 180°
- Shielded and unshielded
- Coding: A, B, D, X



Webcode # 11357

#### M12 Front mounting

PCB circular connector with M12 thread for front mounting.

- Number of poles: 4, 5, 8
- Female and male contact
- Outlet direction: 90°, 180°
- Shielded and unshielded
- Coding: A, B, D, X

## Sensor-actuator interface product configurator

The sensor-actuator-interface cable configurator allows you to custom-create assembled SAI cables (sensor/bus cables) according to your requirements and specifications. You have the choice of configuring a cable which is identical on both ends, or with two different mating profiles, or with one end left open. The cable configurator can also automatically create technical data sheets for all of your customised cable variants.

Webcode # 11363

# OMNIMATE® Housings


## The perfect platform for form and function

Modern and innovative electronics housings owe their success to the synergy between design, connection technologies and functionality. With OMNIMATE® Housings, we offer you the right housings to meet your requirements perfectly.

Weidmüller's electronics provide a state-of-the-art platform for electronics applications: for all design types and usage areas. The application and its requirements are the foundation for the housing design.

Component housings using the standard pitch sizes are particularly well suited for standardised electrical cabinet applications. The CH20M product series is primarily designed for high-spec applications and meets strict requirement profiles, for instance in the areas of machine safety and high-performance signal converters.



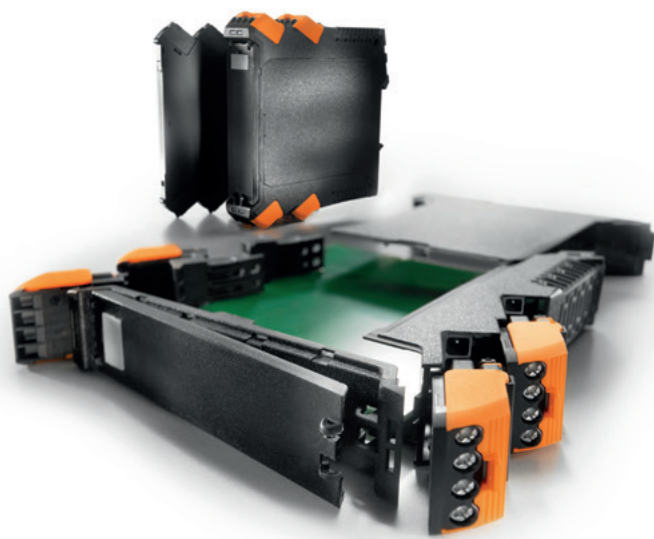


### **OMNIMATE® Housings CH20M - Modular Component Housing**

- Systematic modularity- from head (plate) to (clip-on) foot
- Excellent scalability - 7 different widths, from 6.1 - 67.5 mm
- Maximized security: with leading-pin contact and captive coding system -
- Unlimited continuity - a unified design for all pitch widths
- Very compact size - up to 4 connection levels - with eject lever
- Complete process security - SMT/THR connection components packaged in Tape-on-Reel and an optimized PCB design
- Maximized efficiency - with the optimized use of PCB surface space




# OMNIMATE® Housings

“Tailor-made suits straight off the rack” for application-specific solutions

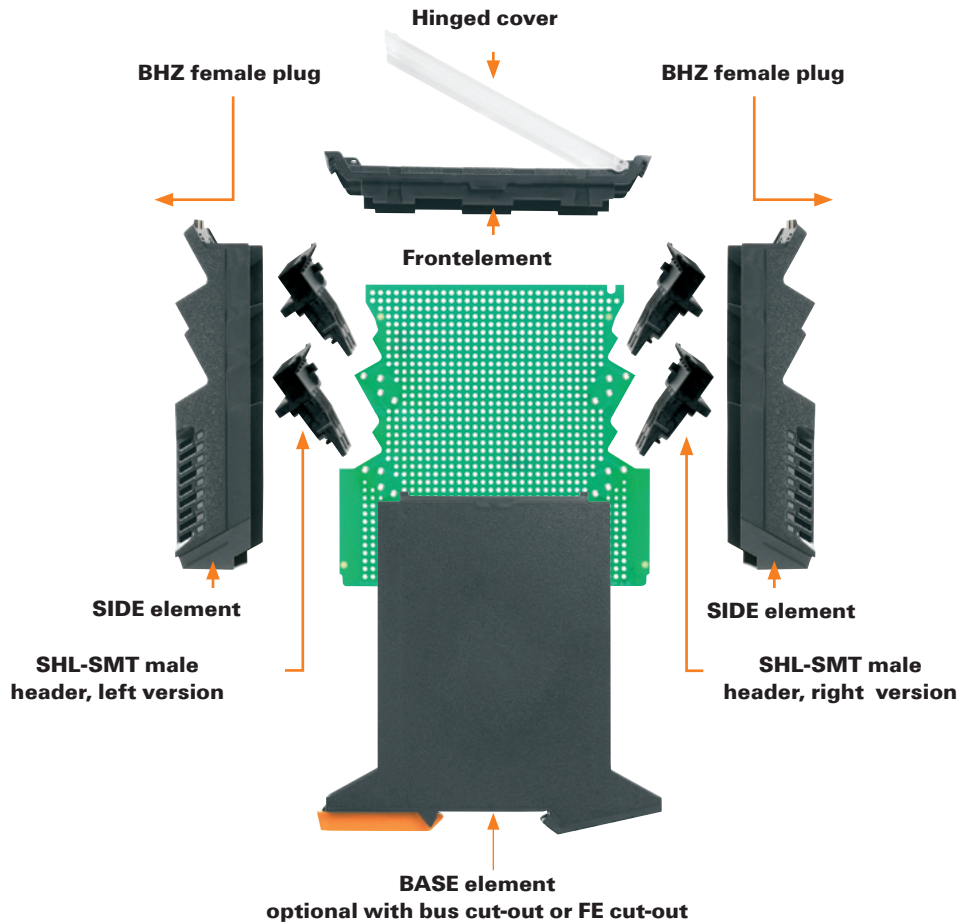


## Features of the BHZ/SHL connector system

- Clamping yoke screw connection – with “WireReady”, “WireGuard” protection and plus/minus screw
- Integrated, captive coding (with “AutoSet” function) protects against accidental mismatch
- Leading contact on the male headers
- Finger-safety provided for both, male and female connector

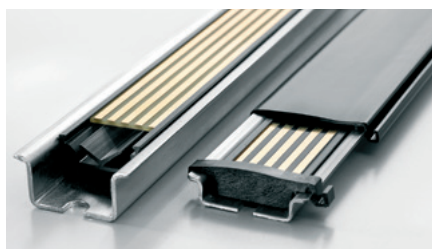

## Unlimited configuration

Compatible: the individual modules can be positioned anywhere on any TS-35 standard top-hat rail. Unused areas are safely covered.

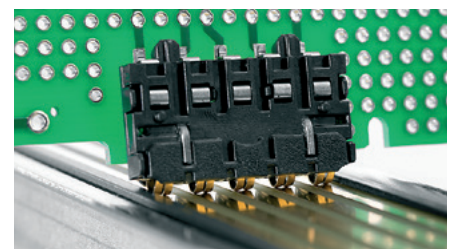


## Maximum availability

Reliable: Five fully-galvanised and partially gold-plated twin-arched contacts are used to establish a permanent contact to the rail bus. THR solder flanges ensure that the connection to the circuit board is stable.



## OMNIMATE® Housing – CH20M

### CH20M



Webcode # 11334

#### CH20M6

The tailor-made solution for a wide application spectrum. Fits in any terminal strip.

- Housing width: 6.1 mm
- Connection levels on each side: 4
- Connectable conductors: 8
- Connection technology reflow-compatible: yes
- Circuit board capacity: 1
- Variable circuit board positions: no



Webcode # 11335

#### CH20M12

The "small" option amongst the "large" housing solutions for compact electronics applications.

- Housing width: 12.5 mm
- Connection levels on each side: 3
- Connectable conductors: 12
- Connection technology reflow-compatible: yes
- Circuit board capacity: 1
- Variable circuit board positions: yes



Webcode # 11336

#### CH20M17

Ideal housing solution for compact standard electronics applications.

- Housing width: 17.5 mm
- Connection levels on each side: 3
- Connectable conductors: 18
- Connection technology reflow-compatible: yes
- Circuit board capacity: 1
- Variable circuit board positions: yes



Webcode # 11337

#### CH20M22

Standard format with optimal width for most typical electronics applications.

- Housing width: 22.5 mm
- Connection levels on each side: 3
- Connectable conductors: 24
- Connection technology reflow-compatible: yes
- Circuit board capacity: 1
- Variable circuit board positions: yes

### CH20M



Webcode # 11338

#### CH20M45

Extra-large size for electronics applications that require more space, such as compact controllers and power supplies.

- Housing width: 45 mm
- Connection levels on each side: 3
- Connectable conductors: 48
- Connection technology reflow-compatible: yes
- Circuit board capacity: 2
- Variable circuit board positions: yes



Webcode # 11339

#### CH20M67

XXL size for those electronics applications that require lots of space, such as compact controllers and power supplies.

- Housing width: 67.5 mm
- Connection levels on each side: 3
- Connectable conductors: 72
- Connection technology reflow-compatible: yes
- Circuit board capacity: 3
- Variable circuit board positions: yes

# Shape design-in processes in a uniquely efficient way

## Our services make sure you get perfect results

They develop connection systems for PCBs and devices based on the final application. Our specialists will gladly provide you with really concrete support with your design-in process, with expertise, advice and a range of useful services.



Our design-in application specialists know your working environment intimately and will support you from the specifications stage right through to series production of your individual solution. Not only will you benefit from our OMNIMATE® services such as the product configurator with 3D models available for download, or the unparalleled 72-hour sample service for your free design-in samples; you'll also have access to a wide range of additional services designed to make your day-to-day work quicker, easier and more professional.



Webcode #01163

### 72-hour sample service

With PCB and device designs, there always comes a point at which design engineers need to find exactly the right connection for their application. Just order your design-in samples, quickly and easily. Make the most of the free 72-hour sample service for OMNIMATE®. Wherever you're situated, we always keep our word and deliver your samples to the desired location within 72 hours.



Webcode #01201

### Webinars on practical issues


Exciting online seminars on relevant issues relating to device connection systems will help you with the practical aspects of your project, from device design to integration into modern drive modules or how to reduced engineering costs. All webinar services are free of charge. You can find out dates, topics and presenters quickly and easily using the corresponding webcode.



Webcode #11359

### Whitepaper

Find out detailed information and interesting facts about trend topics in the field of device connectivity in our Whitepaper section.

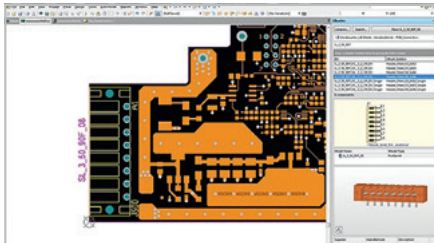

Webcode #01203

### Component library for electronic PCB design

Switching symbols and the painstaking creation of footprints are now things of the past. We offer extensive component libraries of OMNIMATE® PCB terminals and PCB connectors for a wide range of different EDA systems. Simply download and import the data set and you're ready to go.



b2b.partcommunity.com

### CAD models in the Part Community

CAD models for our OMNIMATE® PCB connection systems can be found in one of the industry's most important online forums. The "Part Community" allows engineers and technicians to trade knowledge on technical topics in all fields. The Community's online catalogue contains the exact dimensions and all other relevant data for our products.



Webcode # 11347

### Technical information

The OMNIMATE® device connection methodology is highly flexible, ensuring your application requirements are met. The more familiar you are with it, the easier it is to find the optimum component.



### Weidmüller YouTube channel

Did you know? You can find a range of useful handling videos about our products, as well as exciting company insights, on our YouTube channel. Have a look and subscribe to our channel today!



### On-site advice by application specialists

We develop connection systems for PCBs and devices based on the application. And if you can involve us in your development at an early stage – even better. As part of our personal on-site customer consultancy service, our application specialists will meet with your technicians to discuss questions and problems relating to your project, and will assist you with their comprehensive expertise.

## **Weidmüller – Your partner in Industrial Connectivity**

As experienced experts we support our customers and partners around the world with products, solutions and services in the industrial environment of power, signal and data. We are at home in their industries and markets and know the technological challenges of tomorrow. We are therefore continuously developing innovative, sustainable and useful solutions for their individual needs. Together we set standards in Industrial Connectivity.

Weidmüller Interface GmbH & Co. KG  
Klingenbergstraße 16  
32758 Detmold, Germany  
T +49 5231 14-0  
F +49 5231 14-292083  
info@weidmueller.com  
www.weidmueller.com

Your local Weidmüller partner can  
be found on our website:  
[www.weidmueller.com/countries](http://www.weidmueller.com/countries)

Made in Germany



Order number: 2484590000/10/2016/SMKW