

ECN/PCN No.: R0429

For Manufacturer

Product Description: SMD 1582.4MHz SAW Filter	Abracon Part Number / Part Series: ABSES5AD-L100KM	☐ Documentation only ☒ ECN ☐ EOL	☐ Series ☐ Part Number ☐ Safety ☒ Non-Safety
Affected Revision: IR	New Revision: A	Application:	

Prior to Change:

SMD 1582.4MHz SAW Filter



ABSES5AD-L100KM



Request Samples

Check Inventory

1.4 x 1.1 x 0.7 mm
RoHS Compliant

Frequency Characteristics

S21 narrow band

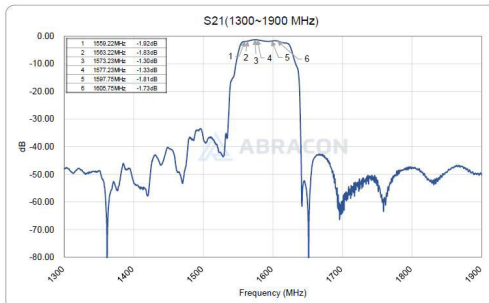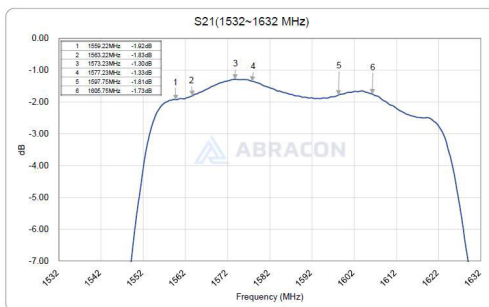

After Change:

SMD 1582.4MHz SAW Filter

ABSES5AD-L100KM

Request Samples





Check Inventory


 1.4 x 1.1 x 0.7 mm
 RoHS Compliant
 MSL Level = 1

Frequency Characteristics

S21 narrow band

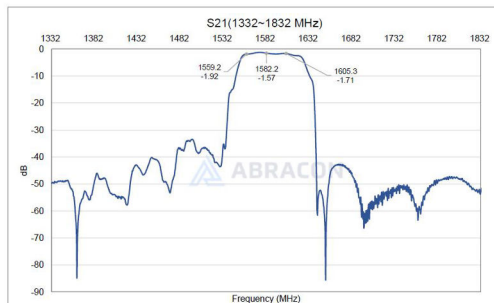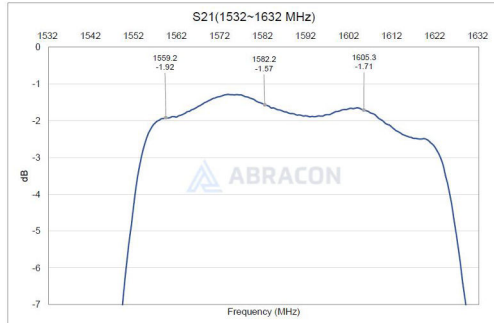

Updated test data

Cause/Reason for Change: Updated test data

Change Plan
Effective Date:

09/16/2025

Additional Remarks:
Change Declaration:
Issued Date:

09/16/2025

Issued By:

Allan

Issued Department:

Engineering

Approval:

Saravanan Subramanian

Engineering Manager

Approval:

Reuben Quintanilla

Quality Director

Approval:

Ying Huang


Purchasing Director

For Abracon EOL only
Last Time Buy (if applicable):
Alternate Part Number / Part Series:
Additional Approval:
Additional Approval:
Additional Approval:
Customer Approval (If Applicable)
Qualification Status:
☐ Approved ☐ Not accepted

Note: It is considered approved if there is no feedback from the customer 1 month after ECN/PCN is released.
Customer Part Number:
Customer Project:

Company Name:	Company Representative:	Representative Signature:
Customer Remarks:		

SMD 1582.4MHz SAW Filter



ABSES5AD-L100KM

Request Samples



Check Inventory



1.4 x 1.1 x 0.7 mm
RoHS Compliant
MSL Level = 1



Features

- Support GPS/GLONASS/BEIDOU/GALILEO
- Bandwidth 46.834MHz
- 1.4 x 1.1 x 0.7 mm in Size
- Low Insertion Loss: 1.2 dB
- Out-of-Band Rejection: > 30 dB
- Maximum Input Power: 10 dBm
- RoHS Compliant


Applications

- RF Modules
- Transportation & Telematics
- Asset Tracking / Fleet Management
- UAVs, Robotics & Autonomous Vehicles
- Micro-Mobility Solutions
- Precision Agriculture

Product Image

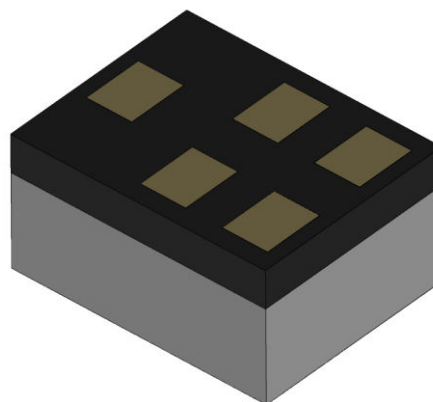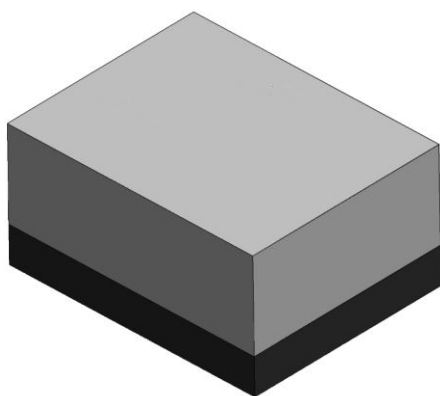

SMD 1582.4MHz SAW Filter



ABSES5AD-L100KM

Request Samples



Check Inventory



1.4 x 1.1 x 0.7 mm
RoHS Compliant
MSL Level = 1


Electrical Specifications

Parameters	Minimum	Typical	Maximum	Units	Notes
Center Frequency (fc)	-	1582.4	-	MHz	-
VSWR ⁽¹⁾	-	1.6	2.0	-	1559.05 - 1563.15 MHz
	-	1.2	2.0		1574.42 - 1576.42MHz
	-	1.3	2.0		1597.78 - 1605.66MHz
Insertion Loss ⁽¹⁾	-	1.8	2.2	dB	1559.05 - 1563.15 MHz
	-	1.2	1.5	dB	1574.42 - 1576.42 MHz
	-	1.5	2.0	dB	1597.78 - 1605.66 MHz
Amplitude Ripple ⁽¹⁾	-	0.2	1.0	dB	1559.05 - 1563.15MHz
	-	0.2	1.0	dB	1574.42 - 1576.42MHz
	-	0.2	1.0	dB	1597.78 - 1605.66MHz
Attenuation ⁽¹⁾ (Reference level from 0 dB)	35	38	-	dB	10 – 925 MHz
	38	42	-		1427 - 1463 MHz
	38	42	-		1710 – 1785 MHz
	38	42	-		1850 – 2025 MHz
	40	45	-		2300 – 3000 MHz
	25	30	-		4800 – 5000 MHz
Group Delay ⁽¹⁾ (+25 °C)	-	14	20	ns	1559.05 -1605.66 MHz
Group Delay Ripple	-	1.5	6.9	ns	1559.05 -1605.66 MHz
Source Impedance ⁽²⁾ (single ended)	-	50	-	Ω	
Load Impedance ⁽²⁾ (single ended)	-	50	-	Ω	
Input Power Level	-	-	10	dBm	
DC Voltage (V)	-	-	3	V	

Notes: (1) Averaged values of linear S-Parameters at +25°C

(2) A matching network is unnecessary (refer to the Measurement Circuits section)

SMD 1582.4MHz SAW Filter



ABSES5AD-L100KM

Request Samples



Check Inventory



1.4 x 1.1 x 0.7 mm
RoHS Compliant
MSL Level = 1


Mechanical Specifications

Parameters	Specifications
Dimension	1.4 x 1.1 x 0.7 mm
Mounting Type	SMD Mount

Environmental Specifications

Parameters	Specifications
Operating Temperature Range	-40°C ~ +85°C
Storage Temperature Range	-40°C ~ +85°C
MSL level	1
ESD	N/A

SMD 1582.4MHz SAW Filter



ABSES5AD-L100KM

Request Samples



Check Inventory



1.4 x 1.1 x 0.7 mm

RoHS Compliant

MSL Level = 1

Ordering Information

Part Number	Description
ABSES5AD-L100KM	SMD 1582.4MHz SAW Filter on Tape & Reel
ABSES5AD-L100KM-EVB	SMD 1582.4MHz SAW Filter Evaluation Board


Note: Other options not listed may be available upon request via [Abracon online support](#)



12117 Bee Caves Rd, Bldg-3, Suite 200 Bee
Cave, TX 78738
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 09-16-25

ABRACON IS
ISO9001-2015
CERTIFIED



SMD 1582.4MHz SAW Filter

ABSES5AD-L100KM

Request Samples




Check Inventory




1.4 x 1.1 x 0.7 mm
RoHS Compliant
MSL Level = 1


Package Dimensions

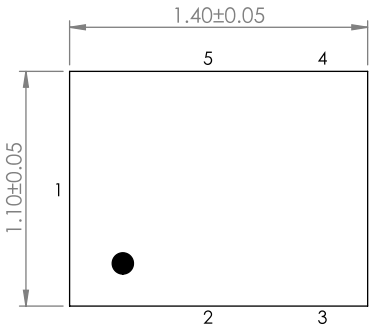

TOP VIEW

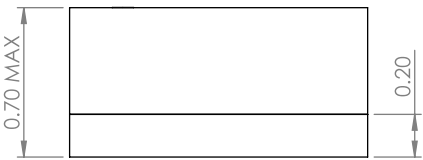

FRONT VIEW

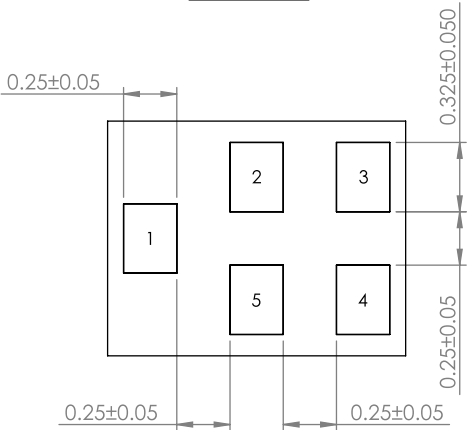


BOTTOM VIEW

Unit: mm

Pin No.	Description
1	Input
4	Output
2, 3, 5	Ground

SMD 1582.4MHz SAW Filter



ABSES5AD-L100KM

Request Samples



Check Inventory




1.4 x 1.1 x 0.7 mm

RoHS Compliant

MSL Level = 1

Recommended Land Pattern

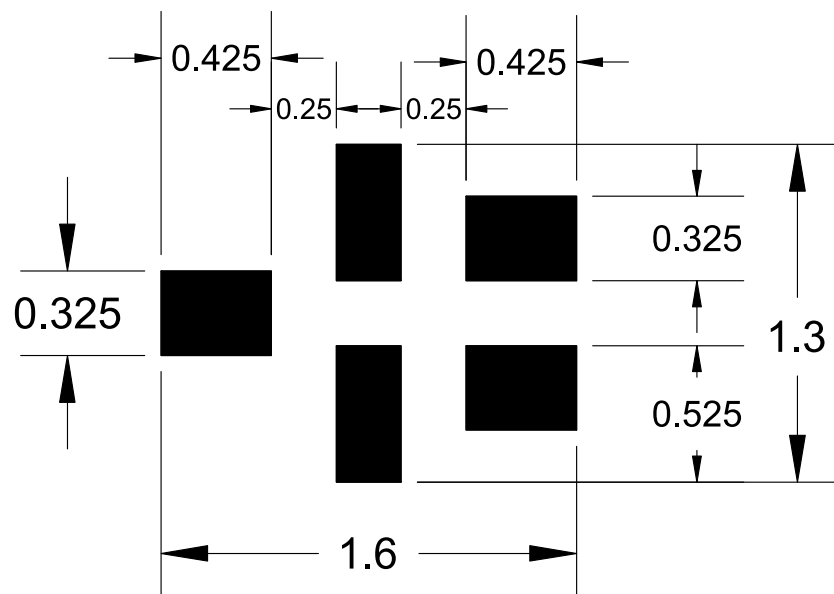


Land Pattern

Unit : mm

Please note: The line width should be designed to achieve a 50-ohm characteristic impedance, depending on the PCB material and thickness. For technical assistance, please contact [Abracon online support](#) through our online support platform.

SMD 1582.4MHz SAW Filter



ABSES5AD-L100KM

Request Samples




Check Inventory




1.4 x 1.1 x 0.7 mm
RoHS Compliant
MSL Level = 1

Measurement Circuit

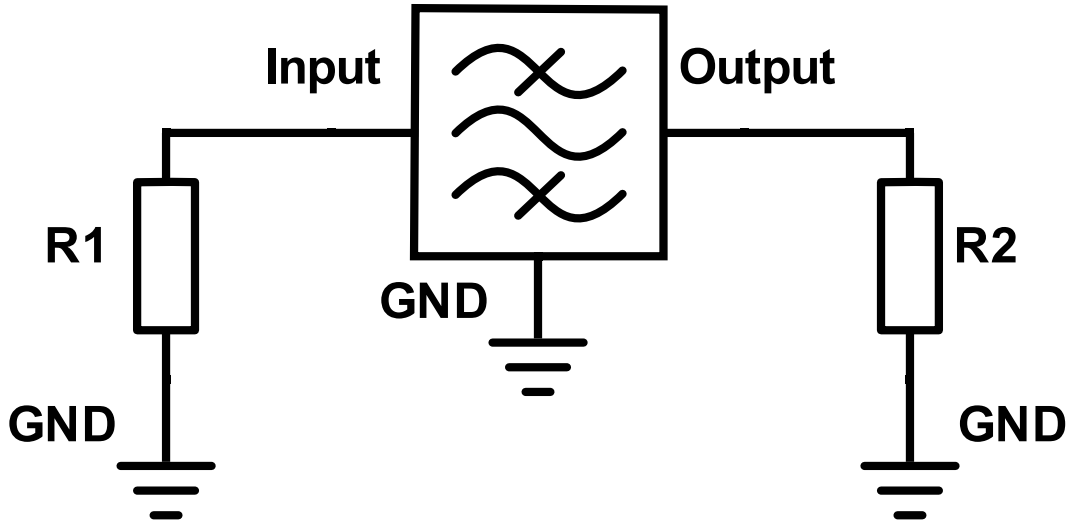

Port	Matching Component
Input (Pin 1)	R1: 50 Ω
Output (Pin 4)	R2: 50 Ω

SMD 1582.4MHz SAW Filter



ABSES5AD-L100KM

Request Samples





Check Inventory




1.4 x 1.1 x 0.7 mm
RoHS Compliant
MSL Level = 1

Frequency Characteristics

S21 narrow band

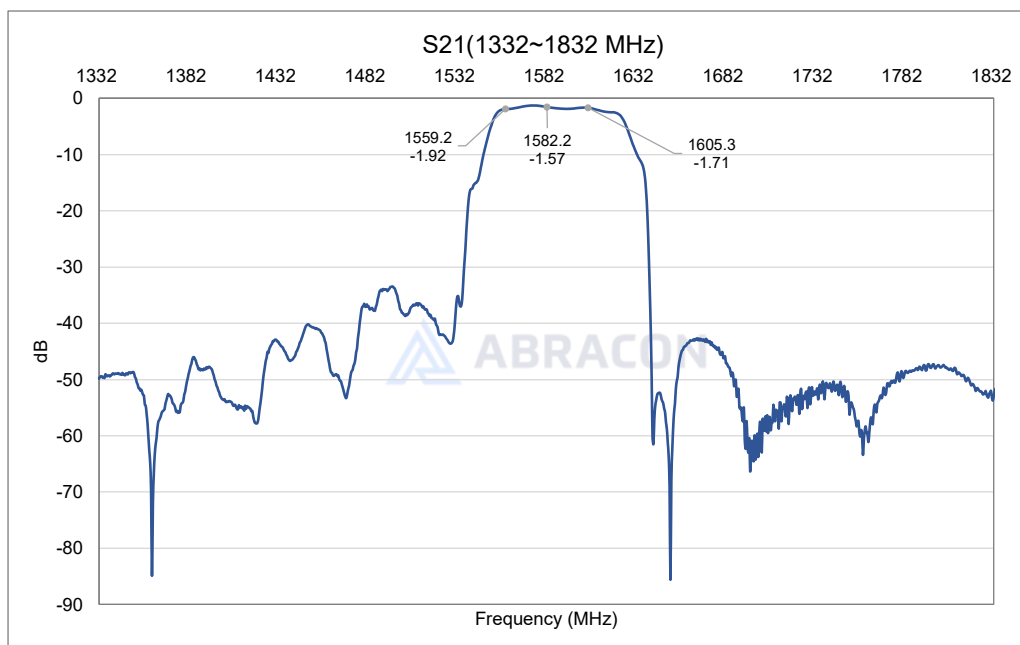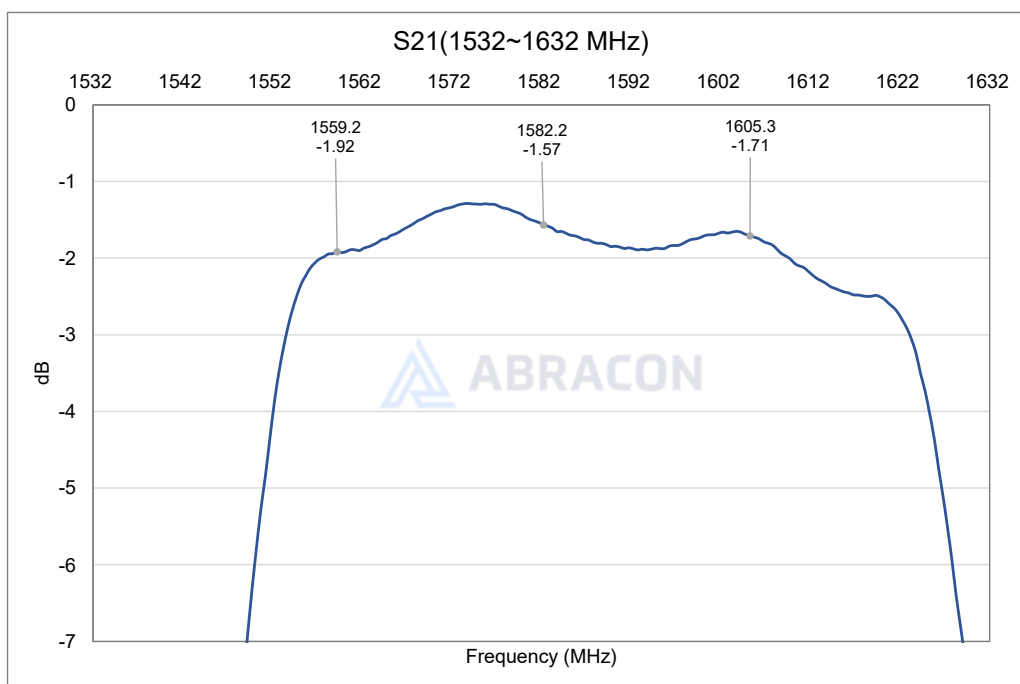

SMD 1582.4MHz SAW Filter



ABSES5AD-L100KM

Request Samples




Check Inventory




1.4 x 1.1 x 0.7 mm
RoHS Compliant
MSL Level = 1


S21 wide band

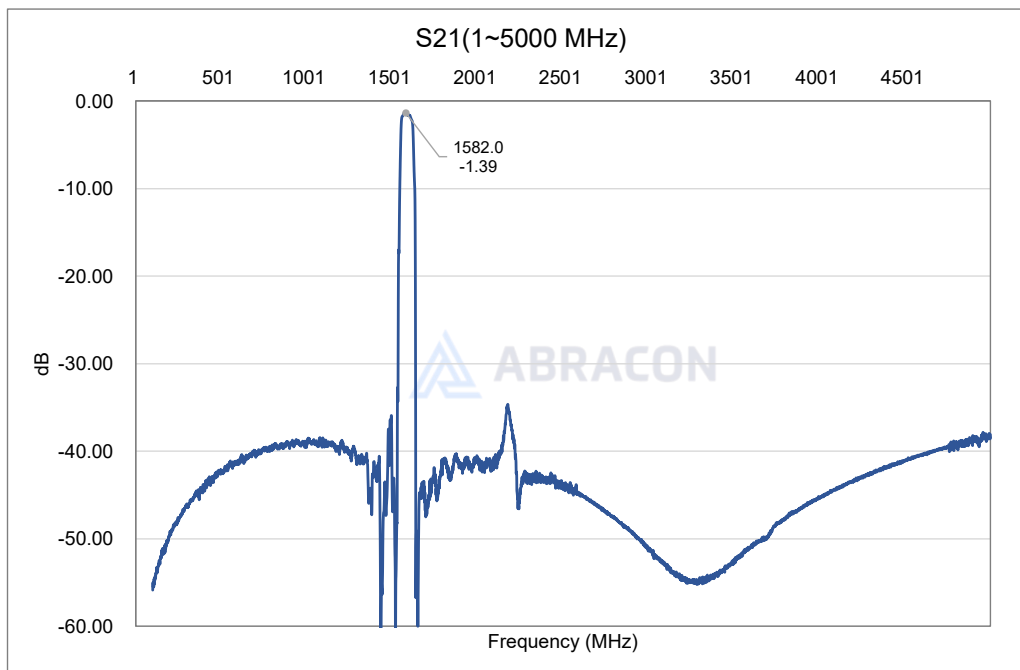

Group Delay

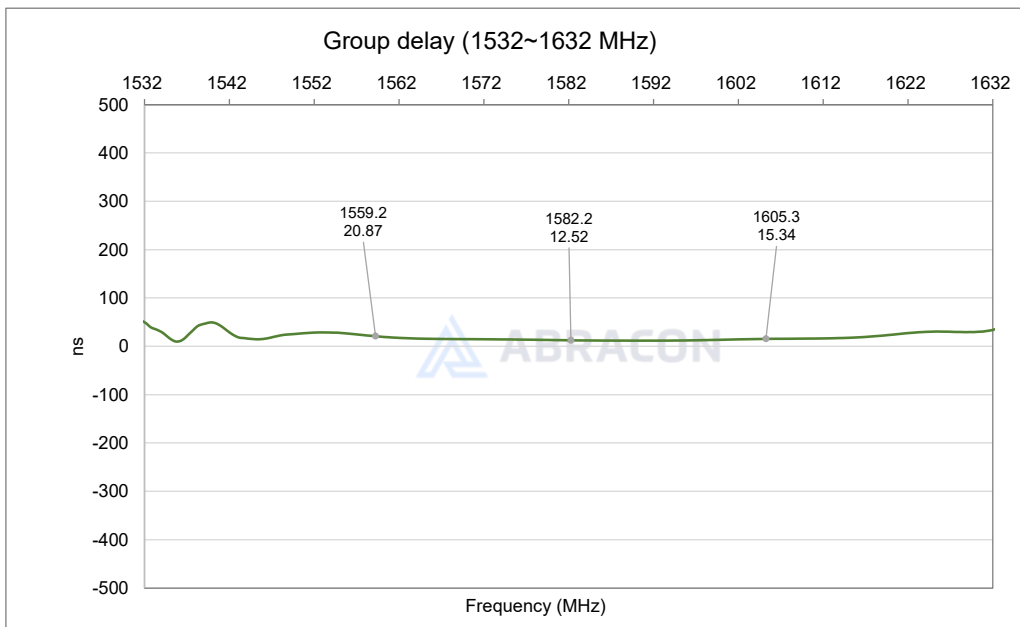

SMD 1582.4MHz SAW Filter



ABSES5AD-L100KM

Request Samples





Check Inventory




1.4 x 1.1 x 0.7 mm
RoHS Compliant
MSL Level = 1

VSWR (S11 & S22)

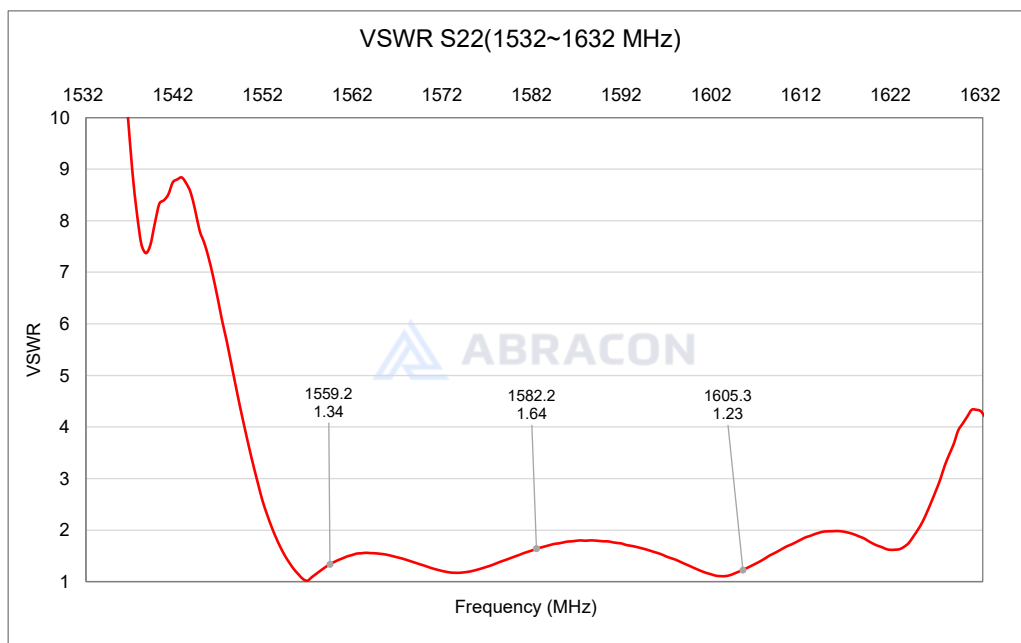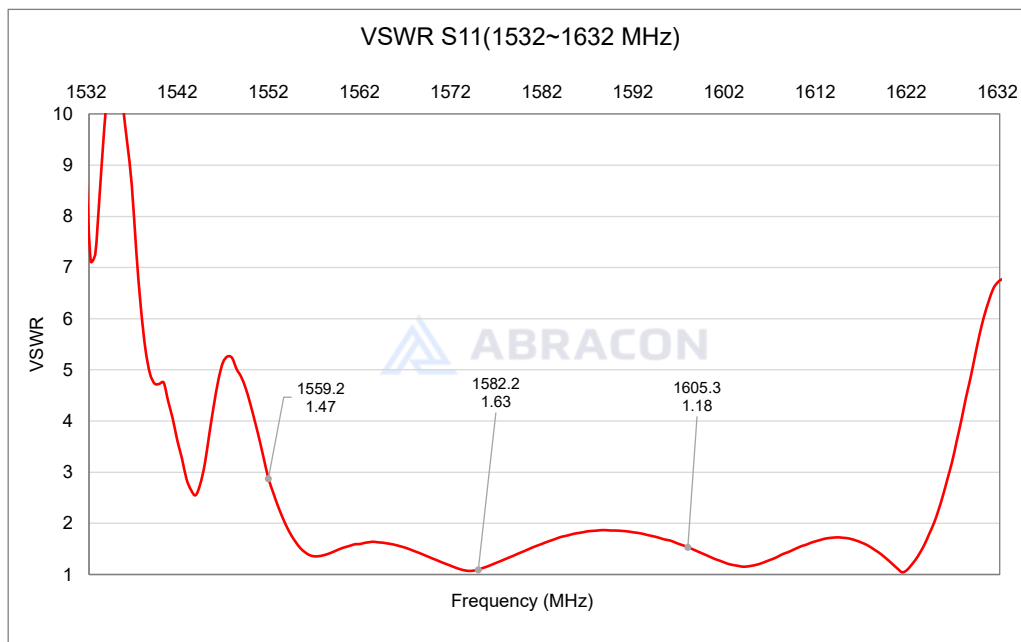

SMD 1582.4MHz SAW Filter



ABSES5AD-L100KM

Request Samples




Check Inventory




1.4 x 1.1 x 0.7 mm
RoHS Compliant
MSL Level = 1

Smith Chart (S11 & S22)


Smith chart S11 (1559~1605MHz)

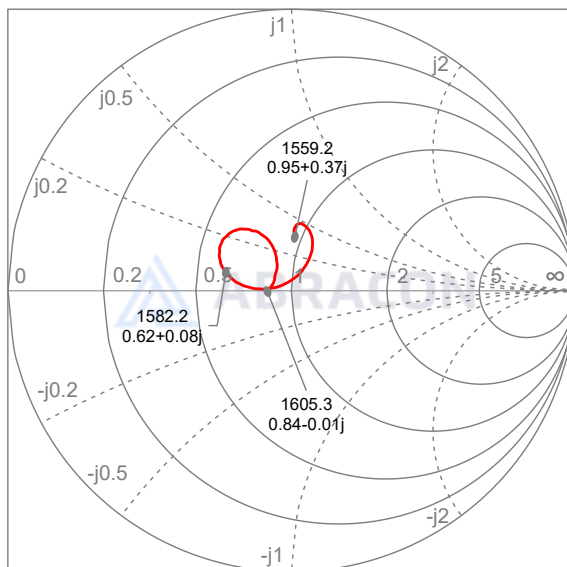

Smith chart S22 (1559~1605MHz)

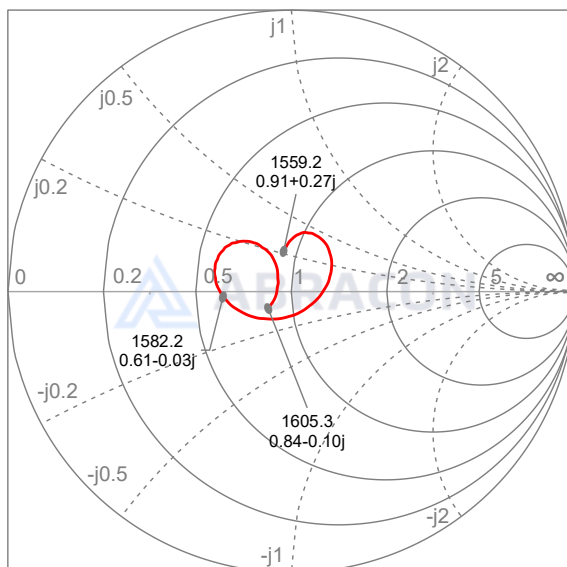

SMD 1582.4MHz SAW Filter



ABSES5AD-L100KM

Request Samples



Check Inventory



1.4 x 1.1 x 0.7 mm
RoHS Compliant
MSL Level = 1

Reflow Profile [JEDEC J-STD-020]

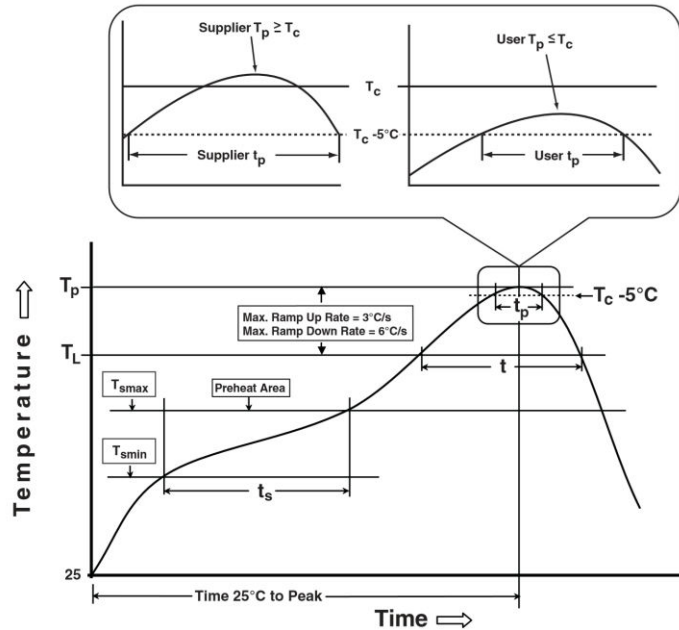


Table 1

SnPb Eutectic Process Classification Temperatures (T_c)

Package Thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5mm	235°C	220°C
≥2.5mm	220°C	220°C

Table 2


Pb-Free Process Classification Temperatures (T_c)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
<1.6mm	260°C	260°C	260°C
1.6mm - 2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat / soak		
Temperature minimum (T _{smmin})	100°C	150°C
Temperature maximum (T _{smmax})	150°C	180°C
Time (T _{smmin} to T _{smmax}) (t _s)	60 – 120 sec.	60 – 90 sec.
Average ramp-up rate (T _{smmax} to T _p)	3°C/sec. max	3°C/sec. max
Liquidous temperature (T _L)	183°C	220°C
Time at Liquidous (T _L)	60 – 150 sec.	50 – 80 sec.
Peak package body temperature (T _p)*	See Table 1	See Table 2
Time (T _p)* within 5°C of the specified classification temperature (T _c)	20 sec.	20 ~ 40 sec.
Ramp-down rate (T _p to T _{smmax})	6°C/sec. max	6°C/sec. max
Time 25°C to peak temperature	6 min. max	8 min. max
Reflow cycles	2 max	2 max

*Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

**Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.



SMD 1582.4MHz SAW Filter

ABSES5AD-L100KM

Request Samples



Check Inventory




1.4 x 1.1 x 0.7 mm
RoHS Compliant
MSL Level = 1

Packaging

Tape & Reel (5,000 pcs / reel)

1. Tape & Reel Dimension

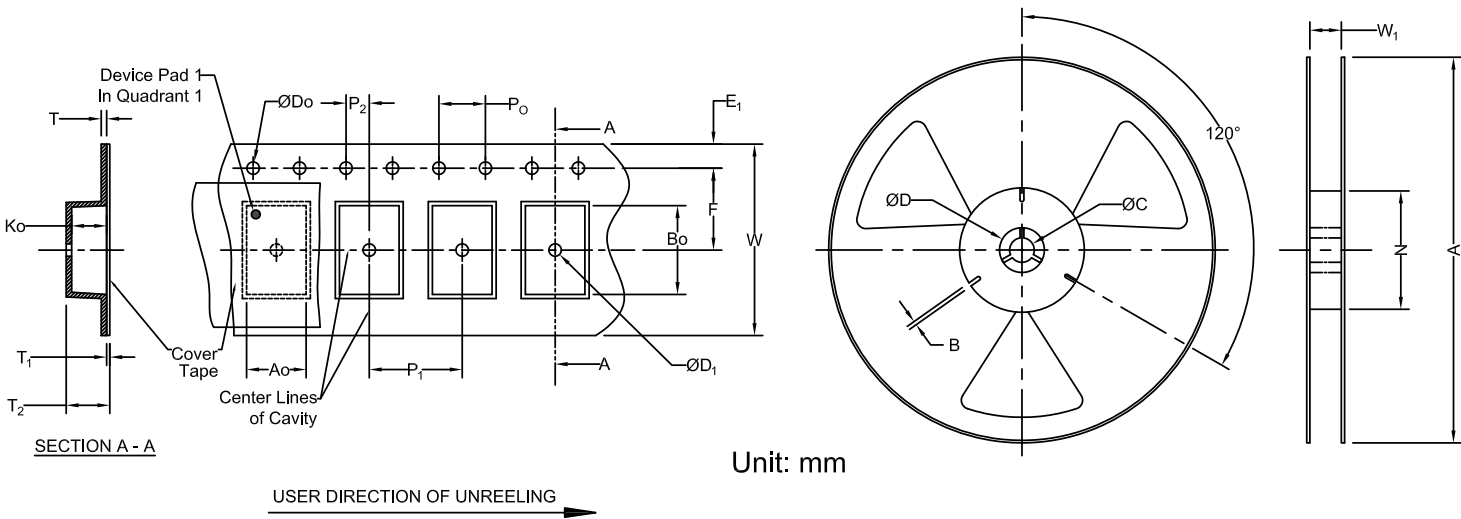

Carrier Tape Specifications (mm)

Do	D1	E1	P0	P2	T	F	P1	W	A0	B0	K0	Reel Qty
1.55 ± 0.05	0.6 ± 0.05	1.75 ± 0.1	4.0 ± 0.1	2.0 ± 0.05	0.2 ± 0.03	3.5 ± 0.05	4.0 ± 0.1	8.0 ± 0.3	1.3 ± 0.05	1.6 ± 0.05	0.68 ± 0.04	5,000

Reel Specifications (mm)

A	W1	N	C	B
180.9 ± 0.15	8.48 ± 0.15	57.12 ± 0.15	13.12 ± 0.15	2.2 ± 0.2

ATTENTION: Abracon LLC's products are Commercial-Off-The-Shelf ('COTS'), which are designed, intended, and validated for use in commercial, industrial, and automotive applications. The customer is responsible for testing and verifying the performance of an Abracon solution to meet their system-level requirements.



12117 Bee Caves Rd, Bldg-3, Suite 200 Bee
Cave, TX 78738
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 09-16-25

ABRACON IS
ISO9001-2015
CERTIFIED

Brand	Affected PN	Discontinued/EOL PN	Added PN
Abracon	ABSES5AD-L100KM		
	ABSES5AD-L100KM-EVB		

Series	ECO#	Datasheet Link
ABSES5AD-L100KM	R0429	https://abracon.com/datasheets/ABSES5AD-L100KM.pdf
ABSES5AD-L100KM	R0429	https://abracon.com/datasheets/ABSES5AD-L100KM.pdf

ECN Notification Link

https://abracon.com/downloads/ECN-PCN/ECN-PCN-Notification_ECOR0429_ABSES5AD-L100KM.pdf

https://abracon.com/downloads/ECN-PCN/ECN-PCN-Notification_ECOR0429_ABSES5AD-L100KM.pdf