



March 9, 2026

To: KII Display Distributors

## **Notice of Product ECN – TCG121XGLBPNN-AN40**

Thank you very much for your continuous support of Kyocera Display products. Due to capacity constraints at our Kyocera production facility, we have made the decision to utilize a partner array to help ensure lead time consistency and long-term availability.

Thank you for your understanding.

### **1. Product Effected:**

- TCG121XGLBPNN-AN40

### **2. New Product Information:**

Changing over to the new array will result in slight changes to the specification of this part. We have created a comparison file to help customers understand the differences between the current part and the new replacement part. The following will be the replacement part number for the outgoing product.

- TCG121XGLBPNN-AN40 → TCG121XGLBPNN-AN40-TA

### **3. Schedule:**

- Last Time Buy Date: July 24, 2026
- Last Time Ship Date: January 29, 2027
- Mass production start: To Be Advised

We apologize for the inconvenience and appreciate your understanding.

Regards,

Kyocera Display

# 12.1inch XGA TFT Change

## TCG121XGLPBPNN-AN40

February 3, 2026

Product Engineering Department  
Display Division  
Corporate Automotive System Group

| Approved    | Checked | Prepared      |
|-------------|---------|---------------|
| I. Kawajiri | Y. Hata | K. Komurasaki |

# About the specifications of Renewal products



|                 |            | TCG121XGLPBPNN-AN40<br>[Current product]  | TCG121XGLPBPNN-AN40-TA<br>[After changes] |
|-----------------|------------|---|---|
| TFT array       |            | Kyocera                                   | Partner                                   |
| Polarizer       |            | B   | CHANGE                                    |
| Driver IC       |            | D   | NO CHANGE                                 |
| PCB             | Substrate  | E   | NO CHANGE                                 |
|                 | Assembly   | Kyocera China factory(SKC)                | NO CHANGE                                 |
|                 | Components | Components change according to TFT change |   |
|                 | Connector  | 20186-020E-11F<br>(I-PEX)                 | FI-SEB20P-HFE<br>(JAE)※compatible model   |
| FPC             |            | F   | CHANGE                                    |
| Backlight       |            | H   | NO CHANGE                                 |
| Backend process |            | Kyocera Thailand factory(KTC)             | Kyocera China factory(SKC)                |
| COO             |            | Thailand                                  | Taiwan,China                              |

The next pages describe the influence on the characteristics.

# Impact on the values stated in the specifications



|                        |                           | TCG121XGLPBPNN-AN40<br>[Current product]                      | TCG121XGLPBPNN-AN40-TA<br>[After changes] |
|------------------------|---------------------------|---|---|
| Product Specifications | Polarizer                 | Anti-Glare treatment  | NO CHANGE                                 |
|                        | Interface                 | LVDS  | NO CHANGE                                 |
|                        | Outline dimensions        | 260.5(W)x203(H)x10.4(D) mm                                    | NO CHANGE                                 |
|                        | Base color                | Normally Black  | NO CHANGE                                 |
|                        | Operating temperature     | -30~80°C  | NO CHANGE                                 |
|                        | Storage temperature       | -30~80°C  | NO CHANGE                                 |
|                        | Supply voltage (LCD)      | Typ. 3.3V   | NO CHANGE                                 |
|                        | Current consumption (LCD) | Typ. 300mA  | NO CHANGE                                 |
|                        | Supply voltage (LED)      | Typ. 12.0V  | NO CHANGE                                 |
|                        | Current consumption (LED) | Typ. 900mA  | NO CHANGE                                 |
|                        | Operating life time       | Typ. 70,000hr<br>( $D_{PWM}=100\%$ , $T_a=25^\circ\text{C}$ ) | NO CHANGE                                 |

Above value is tentative. Please confirm to the specifications for the final value.

# Impact on the values stated in the specifications

| (Ta=25°C)               |  | TCG121XGLPBPNN-AN40(-T)<br>[Current product] | TCG121XGLPBPNN-AN40-TA(-USJ)<br>[After changes] |           |
|-------------------------|--|--|---|-----------|
| Optical characteristics | Response time                              | Rise   | Typ. 18ms                                       | NO CHANGE |
|                         |  | Down   | Typ. 12ms                                       | NO CHANGE |
|                         | Brightness(D <sub>PWM</sub> =100%, Center) |  | Typ. 1,200cd/m <sup>2</sup>                     | NO CHANGE |
|                         | Contrast ratio                             |  | Typ. 750  | NO CHANGE |
|                         | Viewing angle range                        | UPPER  | Typ. 85deg                                      | NO CHANGE |
|                         |  | LOWER  | Typ. 85deg                                      | NO CHANGE |
|                         | CR>10                                      | LEFT   | Typ. 85deg                                      | NO CHANGE |
|                         |  | RIGHT  | Typ. 85deg                                      | NO CHANGE |
|                         | Chromaticity coordinates                   | Red  | 0.600 ± 0.050, 0.350 ± 0.050                    | NO CHANGE |
|                         |  | Green  | 0.335 ± 0.050, 0.570 ± 0.050                    | NO CHANGE |
|                         |  | Blue   | 0.150 ± 0.050, 0.120 ± 0.050                    | NO CHANGE |
|                         |  | White  | 0.320 ± 0.050, 0.345 ± 0.050                    | NO CHANGE |

Above value is tentative. Please confirm to the specifications for the final value.

# Impact on the values stated in the specifications

## TCG121XGLPBPNN-AN40 [Current product]

5-1. LCD

Temp. = -30~80°C

| Item                                 | Symbol         | Condition     | Min.         | Typ. | Max.         | Unit     |
|--------------------------------------|----------------|---------------|--------------|------|--------------|----------|
| Supply voltage                       | 1) $V_{DD}$    | -             | 3.0          | 3.3  | 3.6          | V        |
| Current consumption                  | $I_{DD}$       | 2)            | -            | 300  | 390          | mA       |
| Permissible input ripple voltage     | $V_{RP}$       | $V_{DD}=3.3V$ | -            | -    | 100          | mVp-p    |
| Input signal voltage                 | 3) $V_{IL}$    | "Low" level   | 0            | -    | $0.3V_{DD}$  | V        |
|                                      | $V_{IH}$       | "High" level  | $0.7V_{DD}$  | -    | $V_{DD}$     | V        |
| Input leak current                   | $I_{OL}$       | $V_{IS}=0V$   | -10          | -    | 10           | $\mu A$  |
|                                      | $I_{OH}$       | $V_{IS}=3.3V$ | -            | -    | 400          | $\mu A$  |
| LVDS Input voltage                   | 4) $V_L$       | -             | 0            | -    | 1.9          | V        |
| Differential input voltage           | $V_{ID}$       | -             | 200          | -    | 600          | mV       |
| Differential input threshold voltage | 4) 5) $V_{TL}$ | "Low" level   | $V_{CM}-100$ | -    | -            | mV       |
|                                      | $V_{TH}$       | "High" level  | -            | -    | $V_{CM}+100$ | mV       |
| Terminator                           | $R_1$          | -             | -            | 100  | -            | $\Omega$ |
| $V_{DD}$ -turn-on conditions         | 1) 6) $t_1$    | -             | 0.1          | -    | 20           | ms       |
|                                      | $t_2$          | -             | 10           | -    | -            | ms       |
|                                      | $t_3$          | -             | 0            | -    | -            | ms       |
|                                      | $t_4$          | -             | 2            | -    | -            | s        |
|                                      | $t_5$          | -             | 200          | -    | -            | ms       |
|                                      | $t_6$          | -             | 200          | -    | -            | ms       |



## TCG121XGLPBPNN-AN40-TA [After changes]

$T_a = -30\sim 80^\circ C$

| Min.         | Typ. | Max.         | Unit     |
|--------------|------|--------------|----------|
| 3.0          | 3.3  | 3.6          | V        |
| -            | 300  | 390          | mA       |
| -            | -    | 100          | mVp-p    |
| 0            | -    | $0.3V_{DD}$  | V        |
| $0.7V_{DD}$  | -    | $V_{DD}$     | V        |
| -10          | -    | 10           | $\mu A$  |
| -            | -    | 20           | $\mu A$  |
| 0            | -    | 2.1          | V        |
| 200          | -    | 600          | mV       |
| $V_{CM}-100$ | -    | -            | mV       |
| -            | -    | $V_{CM}+100$ | mV       |
| -            | 100  | -            | $\Omega$ |
| 0.1          | -    | 20           | ms       |
| 10           | -    | -            | ms       |
| 0            | -    | -            | ms       |
| 2            | -    | -            | s        |
| 200          | -    | -            | ms       |
| 200          | -    | -            | ms       |

Revise to the latest notation.

| Item                          | Test condition  | Criteria  | N | Result |
|-------------------------------|---|---|---|--------|
| High temp. operation          | 80°C/Dry/500Hr  | Function/display image:<br>No abnormality is confirmed<br><br>Current consumption:<br>No abnormality is confirmed | 3 | Pass   |
| High temp. humidity operation | 40°C/90%RH/500Hr  |   | 3 | Pass   |
| Low temp. operation           | -30°C/Dry/500Hr   |   | 3 | Pass   |
| Temp. cycle                   | -30°C ↔ 80°C/240Cycle   |   | 3 | Pass   |
| Vibration                     | 2G/10~100Hz/ ↔ 5min<br>Sine wave/X,Y,Z/2Hr for each axis        | Function/display image:<br>No abnormality is confirmed  | 2 | Pass   |
| Shock                         | 50G/11msec/half-sine wave<br>± X, ± Y, ± Z/3 time for each axis |   | 2 | Pass   |

There were no problems in the reliability test.



KYOCERA Corporation

# SPEC for Mass Production

|          |                       |
|----------|-----------------------|
| Spec No. | TQ3C-8EAF0-E1YAL84-03 |
| Date     | February 4, 2026      |

## **TYPE : TCG121XGLPBPNN-AN40-TA**

<12.1 inch XGA transmissive color TFT with LED backlight  
and constant current circuit for LED backlight>

### CONTENTS

1. Application
2. Construction and outline
3. Mechanical specifications
4. Absolute maximum ratings
5. Electrical characteristics
6. Optical characteristics
7. Interface signals
8. Input timing characteristics
9. Lot number identification
10. Warranty
11. Precautions for use
12. Reliability test data
13. Outline drawing



KYOCERA CORPORATION

This specification is subject to change without notice.  
Consult Kyocera before ordering.

|                     |                                |                |                    |                        |
|---------------------|--------------------------------|----------------|--------------------|------------------------|
| Original Issue Date | Designed by: Engineering dept. |                |                    | Confirmed by: QA dept. |
|                     | Prepared                       | Checked        | Approved           | Approved               |
| April 5, 2022       | <i>K. Komurasaki</i>           | <i>Y. Hata</i> | <i>I. Kawajiri</i> | <i>T. Sawada</i>       |

## **Warning**

1. This Kyocera LCD module has been specifically designed for use only in electronic devices and industrial machines in the area of audio control, office automation, industrial control, home appliances, etc. The module should not be used in applications where the highest level of safety and reliability are required and module failure or malfunction of such module results in physical harm or loss of life, as well as enormous damage or loss. Such fields of applications include, without limitation, medical, aerospace, communications infrastructure, atomic energy control. Kyocera expressly disclaims any and all liability resulting in any way to the use of the module in such applications.
2. Customer agrees to indemnify, defend and hold Kyocera harmless from and against any and all actions, claims, damages, liabilities, awards, costs, and expenses, including legal expenses, resulting from or arising out of Customer's use, or sale for use, or Kyocera modules in applications.

## **Caution**

1. Kyocera shall have the right, which Customer hereby acknowledges, to immediately scrap or destroy tooling for Kyocera modules for which no Purchase Orders have been received from the Customer in a two-year period.
2. Please note that we may not be able to respond to new environmental regulations after receiving the final mass production order for this product.

Spec No.

TQ3C-8EAF0-E1YAL84-03

Part No.

TCG121XGLPBPNN-AN40-TA

Page

-

## Revision record

| Date             |               | Designed by : Engineering dept. |   |                    | Confirmed by :<br>QA dept. |
|------------------|---------------|---------------------------------|---|--------------------|----------------------------|
|                  |               | Prepared                        | Checked   | Approved           | Approved                   |
| February 4, 2026 |               | <i>K. Komurasaki</i>            | <i>Y. Hata</i>  | <i>I. Kawajiri</i> | <i>T. Sawada</i>           |
| Rev. No.         | Date          | Page                            | Descriptions  |                    |                            |
| 01               | Jan. 25, 2024 | 5                               | 1) V <sub>IN</sub> -turn-on conditions<br>Modify the diagram.   |                    |                            |
|                  |               | 11                              | 7-3. Data mapping (6bit input)<br>Modify the diagram.   |                    |                            |
| 02               | Mar. 10, 2025 | -                               | Remove the CONFIDENTIAL notation.   |                    |                            |
|                  |               | 2                               | 4-2. Environmental absolute maximum ratings<br>Revise the description of operating temperature.                                       |                    |                            |
|                  |               | 2-8                             | Changed the symbols.<br>Temp. → Ta<br>Ta → Temp.  |                    |                            |
|                  |               | 3, 4                            | 5-1. LCD<br>-Revise the maximum values of input leak current and LVDS input voltage.<br>-Revise the V <sub>CM</sub> value in Note 5). |                    |                            |
|                  |               | 9                               | 7-1. LCD<br>-Add "(CN1)" to LCD connector and Matching connector.<br>-Add the LCD connector (CN1).                                    |                    |                            |
|                  |               | 10                              | 7-2. LED<br>Add "(CN3)" to LCD connector and matching connector.  |                    |                            |
|                  |               | 17                              | 9. Lot number identification<br>Add version number.   |                    |                            |
|                  |               | -                               | Revise the outline drawing.   |                    |                            |
| 03               | Feb. 4, 2026  | 2                               | 4-2. Environmental absolute maximum ratings<br>Revised note on operating temperature  |                    |                            |
|                  |               | 9                               | 7-1. LCD<br>Added description of scan direction   |                    |                            |
|                  |               | 17                              | 9. Lot number identification<br>Revised the description   |                    |                            |
|                  |               | -                               | Revise the outline drawing  |                    |                            |
|                  |               |                                 |   |                    |                            |

## 1. Application

This document defines the specification of TCG121XGLPBPNN-AN40-TA. (RoHS Compliant)

## 2. Construction and outline

|                    |  |
|--------------------|--|
| LCD                | : Transmissive color dot matrix type TFT   |
| Backlight system   | : LED  |
| Polarizer          | : Anti-Glare treatment   |
| Interface          | : LVDS   |
| Additional circuit | : Timing controller, Power supply (3.3V input)<br>With constant current circuit for LED Backlight(12V input) |

## 3. Mechanical specifications

| Item                  | Specification                                       | Unit |
|-----------------------|---|------|
| Outline dimensions 1) | 260.5(W)×203(H)×10.4(D)                             | mm   |
| Active area           | 245.76(W)×184.32(H)<br>(30.8cm/12.1 inch(Diagonal)) | mm   |
| Dot format            | 1,024×(B,G,R)(W)×768(H)                             | dot  |
| Dot pitch             | 0.08(W)×0.24(H)                                     | mm   |
| Base color 2)         | Normally Black                                      | -    |
| Mass                  | 555   | g    |

1) Projection not included. Please refer to outline for details.

2) Due to the characteristics of the LCD material, the color varies with environmental temperature.

## 4. Absolute maximum ratings

### 4-1. Electrical absolute maximum ratings

| Item                            |                                 | Symbol          | Min. | Max.                 | Unit |
|---------------------------------|---------------------------------|-----------------|------|----------------------|------|
| Supply voltage(+3.3V)           |                                 | V <sub>DD</sub> | -0.3 | 3.95                 | V    |
| Supply voltage(+12V)            |                                 | V <sub>IN</sub> | -0.3 | 14.0                 | V    |
| Input signal<br>Voltage      1) | RxINi+, RxINi-      (i=0,1,2,3) | V <sub>I1</sub> | -0.3 | V <sub>DD</sub> +0.3 | V    |
|                                 | CK IN+, CK IN-                  | V <sub>I2</sub> | -0.3 | V <sub>DD</sub> +0.3 | V    |
|                                 | MODE, SC                        | V <sub>I3</sub> | -0.3 | V <sub>DD</sub> +0.3 | V    |
|                                 | BLBRT, BLEN                     | V <sub>I4</sub> | -0.3 | V <sub>IN</sub>      | V    |

1) V<sub>DD</sub> must be supplied correctly within the range described in 5-1.

### 4-2. Environmental absolute maximum ratings

| Item                             | Symbol           | Min. | Max. | Unit |
|----------------------------------|------------------|------|------|------|
| Operating temperature      1) 2) | T <sub>OP</sub>  | -30  | 80   | °C   |
| Storage temperature      3)      | T <sub>STO</sub> | -30  | 80   | °C   |
| Operating humidity      4)       | H <sub>OP</sub>  | 10   | 5)   | %RH  |
| Storage humidity      4)         | H <sub>STO</sub> | 10   | 5)   | %RH  |
| Vibration                        | -                | 6)   | 6)   | -    |
| Shock                            | -                | 7)   | 7)   | -    |

1) Operating temperature range defines the operation only and the contrast, response time and other display optical characteristics are set at Ta (Ambient Temperature) =25°C.

2) Panel surface temperature (all the surface).

3) Ta = -30°C < 48h , Ta = 80°C < 168h

Store LCD at normal temperature/humidity. Keep them free from vibration and shock.

An LCD that is kept at a low or a high temperature for a long time can be defective due to other conditions, even if the low or high temperature satisfies the standard.

(Please refer to “Precautions for Use” for details.)

4) Non-condensing

5) Ta ≤ 40°C, 85%RH Max.

Ta > 40°C, Absolute humidity shall be less than 85%RH at 40°C.

6)

|                 |             |   |
|-----------------|-------------|---|
| Frequency       | 10~55 Hz    | Acceleration value<br>(0.3~9 m/s <sup>2</sup> ) |
| Vibration width | 0.15mm      |   |
| Interval        | 10-55-10 Hz | 1minute   |

2 hours in each direction X, Y, Z (6 hours total)

EIAJ ED-2531

7) Acceleration: 490 m/s<sup>2</sup>, Pulse width: 11 ms

3 times in each direction: ±X, ±Y, ±Z

EIAJ ED-2531


## 5. Electrical characteristics

### 5-1. LCD

Ta = -30~80°C

| Item                                       | Symbol          | Condition             | Min.                 | Typ. | Max.                 | Unit  |
|--|-----------------|-----------------------|----------------------|------|----------------------|-------|
| Supply voltage 1)                          | V <sub>DD</sub> | -                     | 3.0                  | 3.3  | 3.6                  | V     |
| Current consumption                        | I <sub>DD</sub> | 2)                    | -                    | 300  | 390                  | mA    |
| Permissive input ripple voltage            | V <sub>RP</sub> | V <sub>DD</sub> =3.3V | -                    | -    | 100                  | mVp-p |
| Input signal voltage 3)                    | V <sub>IL</sub> | "Low" level           | 0                    | -    | 0.3V <sub>DD</sub>   | V     |
|  | V <sub>IH</sub> | "High" level          | 0.7V <sub>DD</sub>   | -    | V <sub>DD</sub>      | V     |
| Input leak current                         | I <sub>OL</sub> | V <sub>I3</sub> =0V   | -10                  | -    | 10                   | μA    |
|  | I <sub>OH</sub> | V <sub>I3</sub> =3.3V | -                    | -    | 20                   | μA    |
| LVDS Input voltage 4)                      | V <sub>L</sub>  | -                     | 0                    | -    | 2.1                  | V     |
| Differential input voltage 4)              | V <sub>ID</sub> | -                     | 200                  | -    | 600                  | mV    |
| Differential input threshold voltage 4) 5) | V <sub>TL</sub> | "Low" level           | V <sub>CM</sub> -100 | -    | -                    | mV    |
|  | V <sub>TH</sub> | "High" level          | -                    | -    | V <sub>CM</sub> +100 | mV    |
| Terminator                                 | R <sub>1</sub>  | -                     | -                    | 100  | -                    | Ω     |
| V <sub>DD</sub> -turn-on conditions 1) 6)  | t1              | -                     | 0.1                  | -    | 20                   | ms    |
|  | t2              | -                     | 10                   | -    | -                    | ms    |
|  | t3              | -                     | 0                    | -    | -                    | ms    |
|  | t4              | -                     | 2                    | -    | -                    | s     |
|  | t5              | -                     | 200                  | -    | -                    | ms    |
|  | t6              | -                     | 200                  | -    | -                    | ms    |

#### 1) V<sub>DD</sub>-turn-on conditions

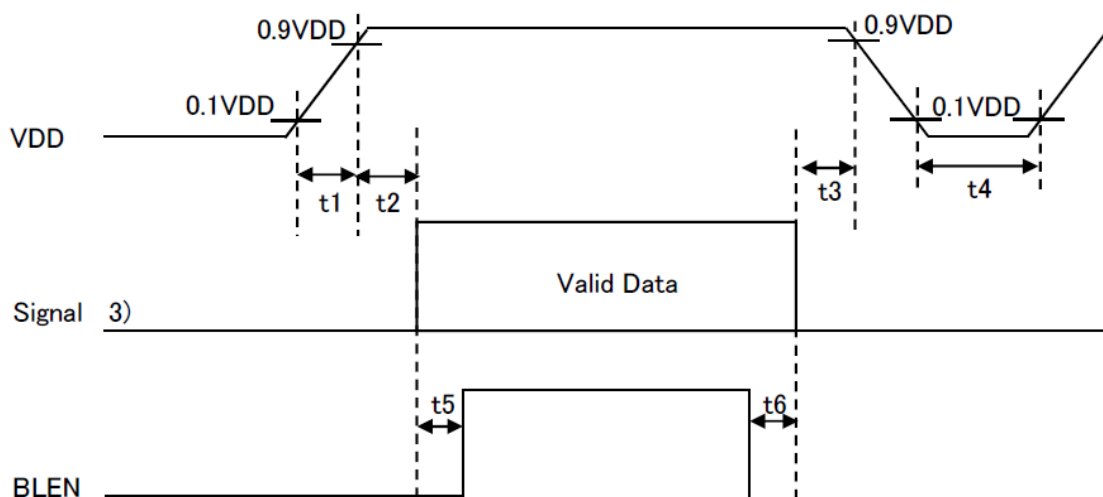




5-2. Constant current circuit for LED Backlight

Ta = -30~80°C


| Item                             | Symbol          | Condition       | Min. | Typ.   | Max.     | Unit  |
|----------------------------------|-----------------|-----------------|------|--------|----------|-------|
| Supply voltage                   | 1) $V_{IN}$     | -               | 10.8 | 12.0   | 13.2     | V     |
| Current consumption              | $I_{IN}$        | 2)              | -    | 900    | 1,110    | mA    |
| Permissible input ripple voltage | $V_{RP\_BL}$    | $V_{IN}=12.0V$  | -    | -      | 100      | mVp-p |
| BLBRT Input signal voltage       | $V_{IL\_BLBRT}$ | "Low" level     | 0    | -      | 0.8      | V     |
|                                  | $V_{IH\_BLBRT}$ | "High" level    | 2.3  | -      | $V_{IN}$ | V     |
| BLBRT Input pull-down resistance | $R_{IN\_BLBRT}$ | -               | 100  | 300    | 500      | kΩ    |
| BLEN Input signal voltage        | $V_{IL\_BLEN}$  | "Low" level     | 0    | -      | 0.8      | V     |
|                                  | $V_{IH\_BLEN}$  | "High" level    | 2.3  | -      | $V_{IN}$ | V     |
| BLEN Input pull-down resistance  | $R_{IN\_BLEN}$  | -               | 100  | 300    | 500      | kΩ    |
| PWM Frequency                    | 3) $f_{PWM}$    | -               | 200  | -      | 10k      | Hz    |
| PWM Duty ratio                   | 3) $D_{PWM}$    | $f_{PWM}=200Hz$ | 1    | -      | 100      | %     |
|                                  |                 | $f_{PWM}=2kHz$  | 10   | -      | 100      | %     |
|                                  |                 | $f_{PWM}=10kHz$ | 50   | -      | 100      | %     |
| Operating life time              | 4), 5) $T$      | Temp.=25°C      | -    | 70,000 | -        | h     |

1)  $V_{IN}$ -turn-on conditions

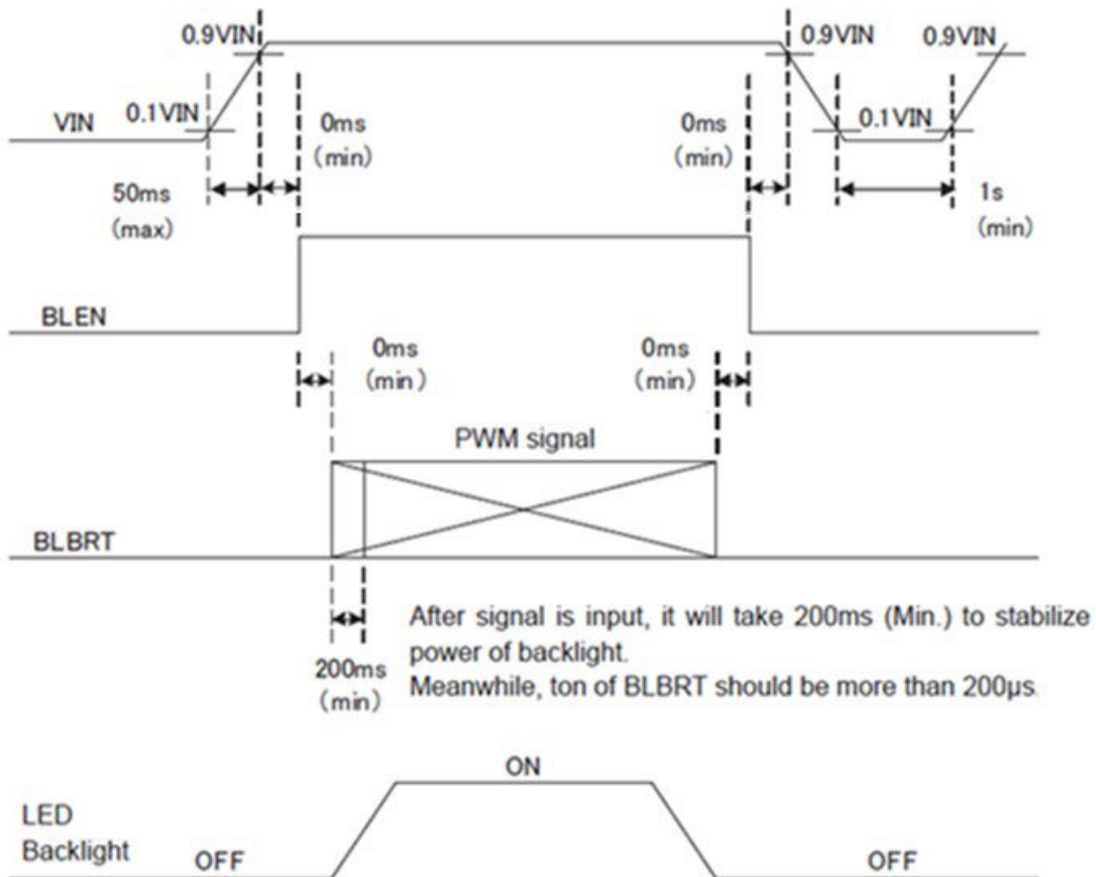

2)  $V_{IN} = 12V$ ,  $T_a = 25^\circ C$ ,  $D_{PWM} = 100\%$

3) PWM timing diagram

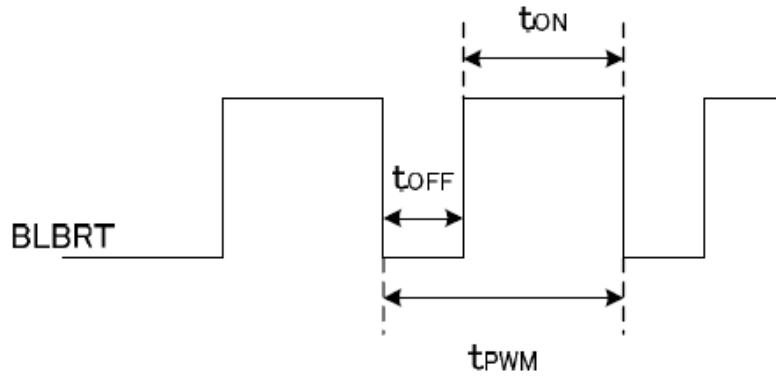

Please do not set  $t_{OFF}$  with  $0 \mu s < t_{OFF} < 1 \mu s$ .

In case of lower frequency, the deterioration of the display quality, flicker etc., may occur.

- 4) When brightness decrease 50% of minimum brightness.  
The average life of a LED will decrease when the LCD is operating at higher temperatures.
- 5) Life time is estimated data. (Condition:  $D_{PWM} = 100\%$ , Temp. =  $25^{\circ}C$  in chamber).

## 6. Optical characteristics


Measuring spot =  $\phi$  6.0mm, Ta = 25°C

| Item                                  | Symbol           | Condition                 | Min.                      | Typ.  | Max.  | Unit              |    |
|---------------------------------------|------------------|---------------------------|---------------------------|-------|-------|-------------------|----|
| Response time                         | Rise             | $\tau_r$                  | $\theta = \phi = 0^\circ$ | -     | 18    | -                 | ms |
|                                       | Down             | $\tau_d$                  | $\theta = \phi = 0^\circ$ | -     | 12    | -                 | ms |
| Viewing angle range<br>View direction | $\theta_{UPPER}$ | $CR \geq 10$              | -                         | 85    | -     | deg.              |    |
|                                       | $\theta_{LOWER}$ |                           | -                         | 85    | -     |                   |    |
|                                       | $\phi_{LEFT}$    |                           | -                         | 85    | -     | deg.              |    |
|                                       | $\phi_{RIGHT}$   |                           | -                         | 85    | -     |                   |    |
| Contrast ratio                        | CR               | $\theta = \phi = 0^\circ$ | 500                       | 750   | -     | -                 |    |
| Brightness                            | L                | DPWM = 100%               | 840                       | 1,200 | -     | cd/m <sup>2</sup> |    |
| Chromaticity coordinates              | Red              | x                         | $\theta = \phi = 0^\circ$ | 0.550 | 0.600 | 0.650             | -  |
|                                       |                  | y                         |                           | 0.300 | 0.350 | 0.400             |    |
|                                       | Green            | x                         | $\theta = \phi = 0^\circ$ | 0.285 | 0.335 | 0.385             |    |
|                                       |                  | y                         |                           | 0.520 | 0.570 | 0.620             |    |
|                                       | Blue             | x                         | $\theta = \phi = 0^\circ$ | 0.100 | 0.150 | 0.200             |    |
|                                       |                  | y                         |                           | 0.070 | 0.120 | 0.170             |    |
|                                       | White            | x                         | $\theta = \phi = 0^\circ$ | 0.270 | 0.320 | 0.370             |    |
|                                       |                  | y                         |                           | 0.295 | 0.345 | 0.395             |    |


### 6-1. Definition of contrast ratio

$$CR(\text{Contrast ratio}) = \frac{\text{Brightness with all pixels "White"}}{\text{Brightness with all pixels "Black"}}$$


### 6-2. Definition of response time

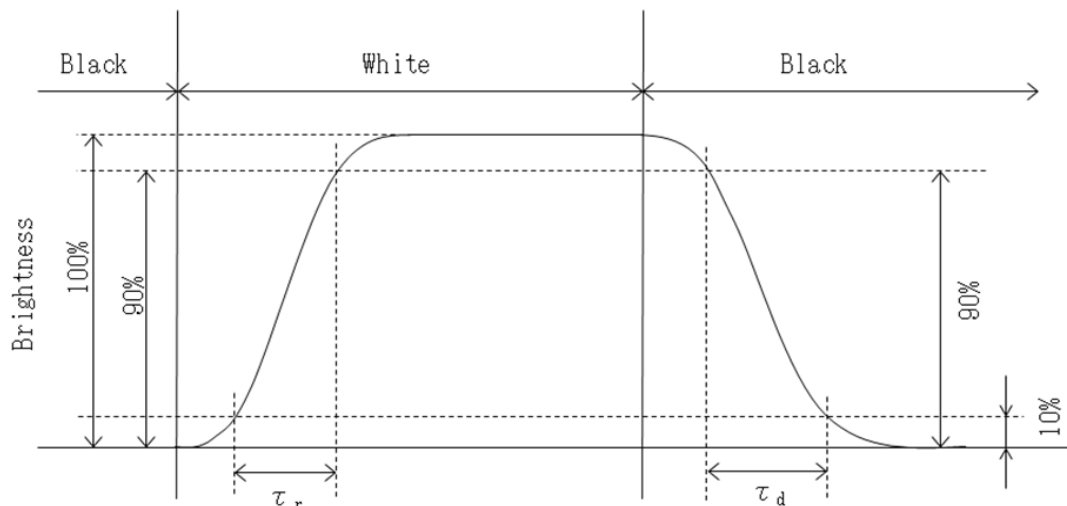

6-3. Definition of viewing angle

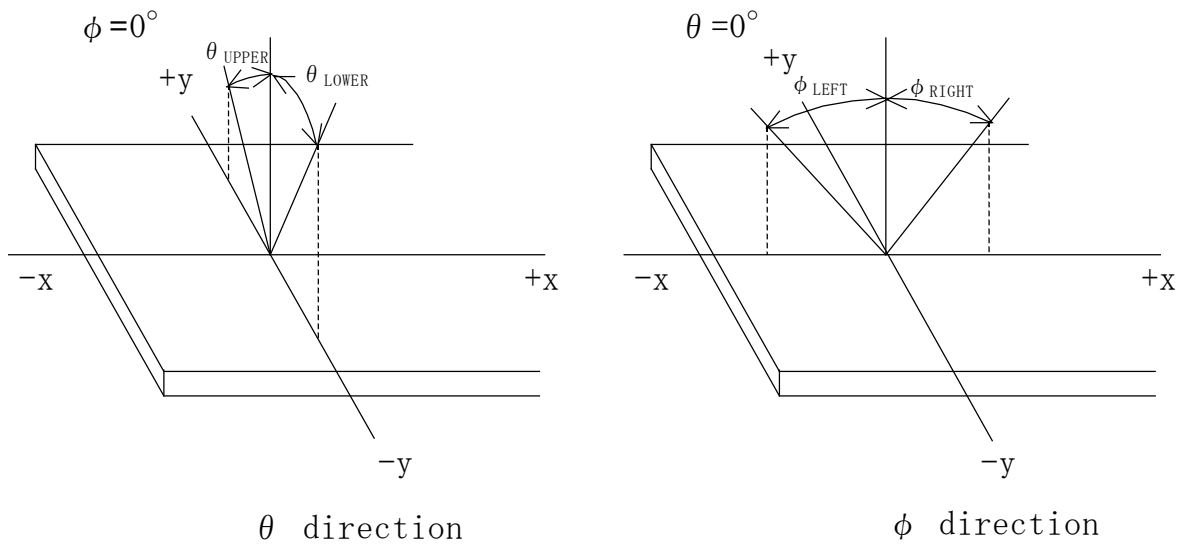

6-4. Brightness measuring point

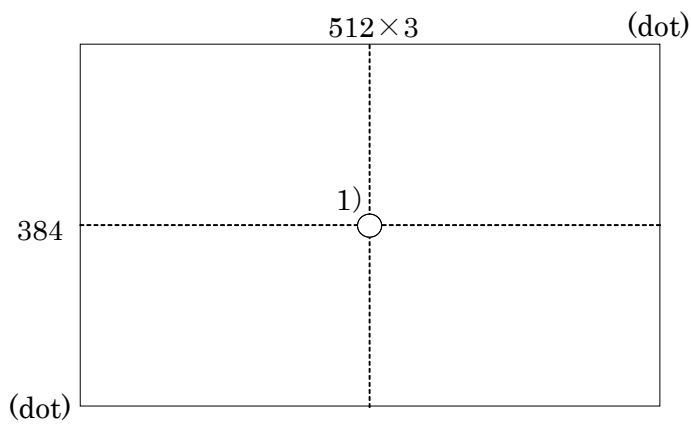

- 1) Rating is defined as the white brightness at center of display screen.
- 2) 5 minutes after LED is turned on. ( $T_a = 25^\circ\text{C}$ )

## 7. Interface signals

### 7-1. LCD

| No. | Symbol          | Description  | Note |
|-----|-----------------|--|------|
| 1   | V <sub>DD</sub> | +3.3V power supply                                     |      |
| 2   | V <sub>DD</sub> | +3.3V power supply                                     |      |
| 3   | GND             | GND  |      |
| 4   | GND             | GND  |      |
| 5   | RxIN0-          | LVDS receiver signal CH0(-)                            | LVDS |
| 6   | RxIN0+          | LVDS receiver signal CH0(+)                            | LVDS |
| 7   | GND             | GND  |      |
| 8   | RxIN1-          | LVDS receiver signal CH1(-)                            | LVDS |
| 9   | RxIN1+          | LVDS receiver signal CH1(+)                            | LVDS |
| 10  | GND             | GND  |      |
| 11  | RxIN2-          | LVDS receiver signal CH2(-)                            | LVDS |
| 12  | RxIN2+          | LVDS receiver signal CH2(+)                            | LVDS |
| 13  | GND             | GND  |      |
| 14  | CK IN1-         | LVDS receiver signal CK(-)                             | LVDS |
| 15  | CK IN1+         | LVDS receiver signal CK(+)                             | LVDS |
| 16  | GND             | GND  |      |
| 17  | RxIN3-          | LVDS receiver signal CH3(-)                            | LVDS |
| 18  | RxIN3+          | LVDS receiver signal CH3(+)                            | LVDS |
| 19  | MODE            | Bit data select signal(GND: 6bit mode、High: 8bit mode) |      |
| 20  | SC              | Scan direction control                                 | 1)   |

LCD connector (CN1) : 20186-020E-11F (I-PEX)  
FI-SEB20P-HFE (JAE)


Matching connector (CN1) : FI-S20S (JAE)

LVDS receiver : Embedded in ASIC


Matching LVDS transmitter : THC63LVDM83D (THine Electronics) or compatible

#### 1) Scan direction

SC : GND  
Scan direction



SC : High



7-2. LED

| No. | Symbol          | Description                       | Note |
|-----|-----------------|-----------------------------------|------|
| 1   | V <sub>IN</sub> | +12V power supply                 |      |
| 2   | V <sub>IN</sub> | +12V power supply                 |      |
| 3   | BLBRT           | PWM signal(Brightness adjustment) |      |
| 4   | BLEN            | ON/OFF terminal voltage           |      |
| 5   | GND             | GND                               |      |
| 6   | GND             | GND                               |      |

LED connector (CN3) : SM06B-SHLS-G-TF(LF)(SN) (JST)


Matching connector (CN3) : SHLP-6V-S-B (JST)

7-3. Data mapping (6bit input)

1) Location of MODE (THC63LVDM83D (THine Electronics) or compatible)

| Transmitter |      | MODE     |
|-------------|------|----------|
| Pin No.     | Data | = L(GND) |
| 51          | TA0  | R0(LSB)  |
| 52          | TA1  | R1       |
| 54          | TA2  | R2       |
| 55          | TA3  | R3       |
| 56          | TA4  | R4       |
| 3           | TA5  | R5(MSB)  |
| 4           | TA6  | G0(LSB)  |
| 6           | TB0  | G1       |
| 7           | TB1  | G2       |
| 11          | TB2  | G3       |
| 12          | TB3  | G4       |
| 14          | TB4  | G5(MSB)  |
| 15          | TB5  | B0(LSB)  |
| 19          | TB6  | B1       |
| 20          | TC0  | B2       |
| 22          | TC1  | B3       |
| 23          | TC2  | B4       |
| 24          | TC3  | B5(MSB)  |
| 27          | TC4  | (HS)     |
| 28          | TC5  | (VS)     |
| 30          | TC6  | DE       |
| 50          | TD0  | GND      |
| 2           | TD1  | GND      |
| 8           | TD2  | GND      |
| 10          | TD3  | GND      |
| 16          | TD4  | GND      |
| 18          | TD5  | GND      |
| 25          | TD6  | (NA)     |

MODE=L (GND)

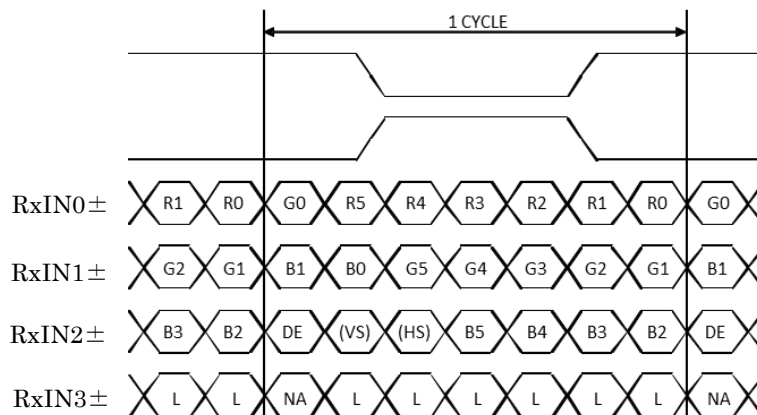


DE : DATA ENABLE

HS : H<sub>SYNC</sub>


VS : V<sub>SYNC</sub>

2) Block diagram

MODE=L (GND)

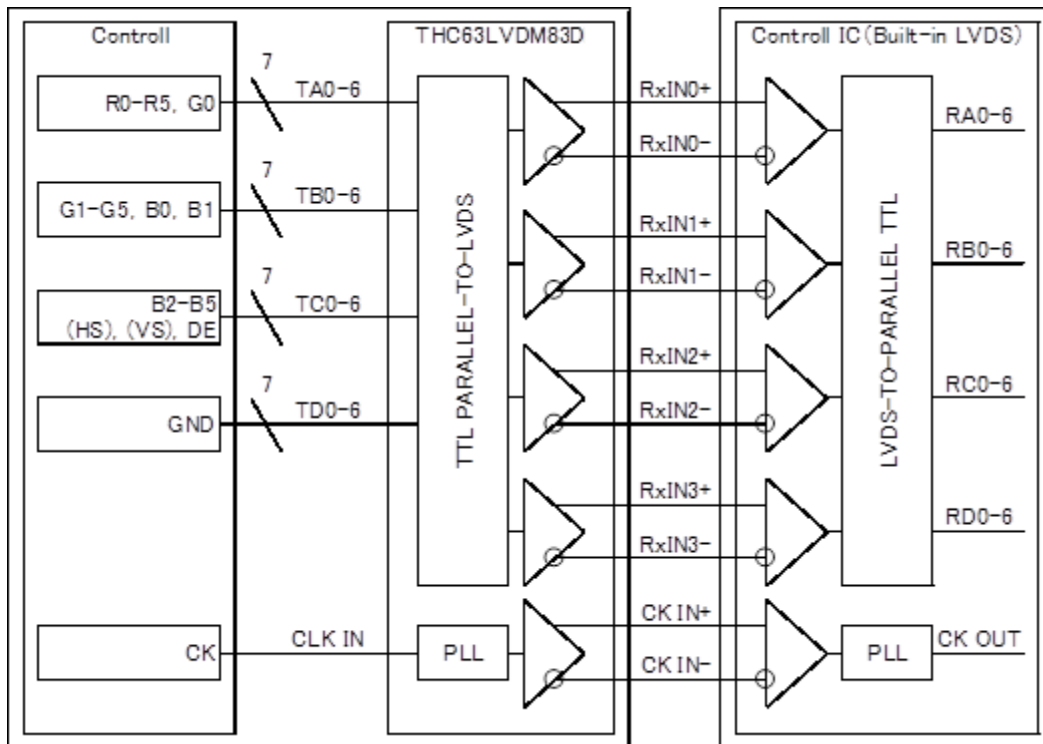

When using “6-bit Transmitter”, please connect the unused channel of the control IC receiver as described in the diagram below.

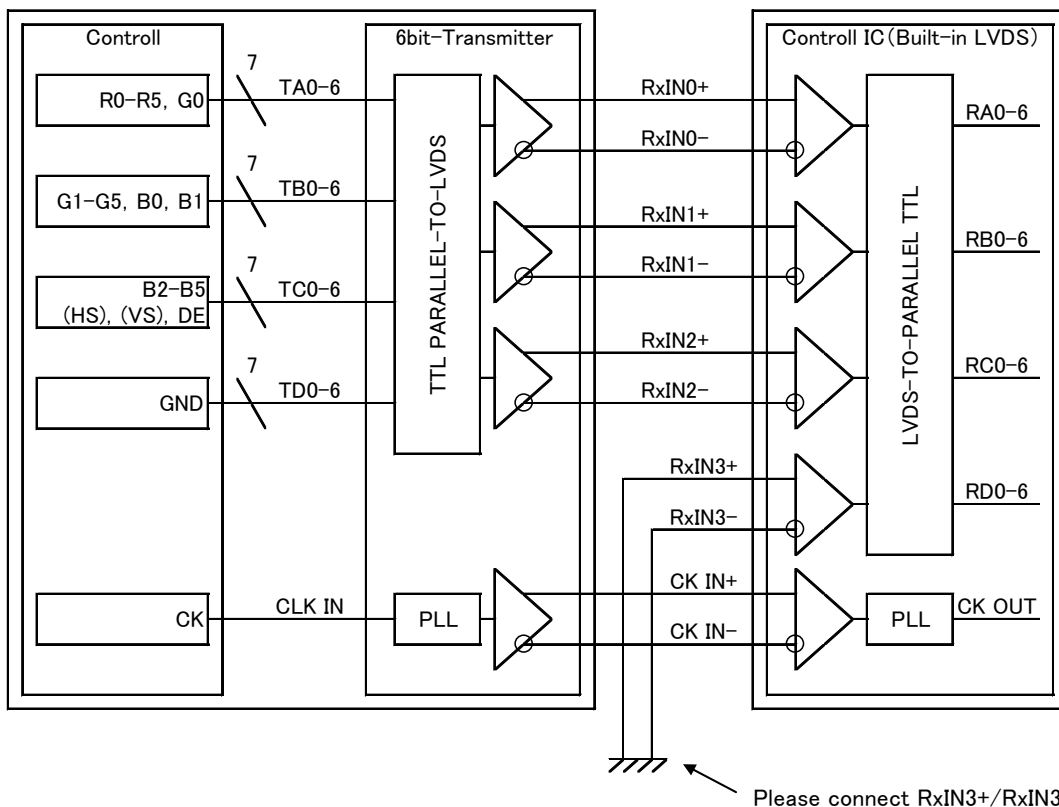


7-4. Data mapping (8bit input)

1) Location of MODE (THC63LVDM83D (THine Electronics) or compatible)

| Transmitter |      | MODE      |
|-------------|------|-----------|
| Pin No.     | Data | = H(3.3V) |
| 51          | TA0  | R0(LSB)   |
| 52          | TA1  | R1        |
| 54          | TA2  | R2        |
| 55          | TA3  | R3        |
| 56          | TA4  | R4        |
| 3           | TA5  | R5        |
| 4           | TA6  | G0(LSB)   |
| 6           | TB0  | G1        |
| 7           | TB1  | G2        |
| 11          | TB2  | G3        |
| 12          | TB3  | G4        |
| 14          | TB4  | G5        |
| 15          | TB5  | B0(LSB)   |
| 19          | TB6  | B1        |
| 20          | TC0  | B2        |
| 22          | TC1  | B3        |
| 23          | TC2  | B4        |
| 24          | TC3  | B5        |
| 27          | TC4  | (HS)      |
| 28          | TC5  | (VS)      |
| 30          | TC6  | DE        |
| 50          | TD0  | R6        |
| 2           | TD1  | R7(MSB)   |
| 8           | TD2  | G6        |
| 10          | TD3  | G7(MSB)   |
| 16          | TD4  | B6        |
| 18          | TD5  | B7(MSB)   |
| 25          | TD6  | (NA)      |

MODE= H(3.3V)

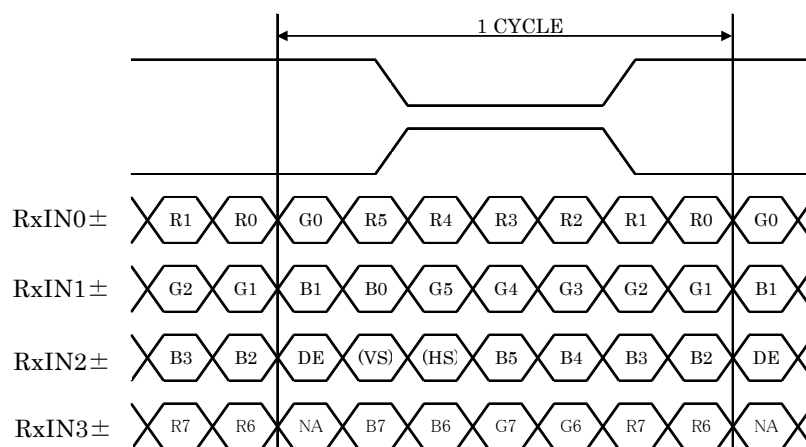


DE : DATA ENABLE

HS : H<sub>SYNC</sub>

VS : V<sub>SYNC</sub>

2) Block diagram

MODE= H (3.3V)

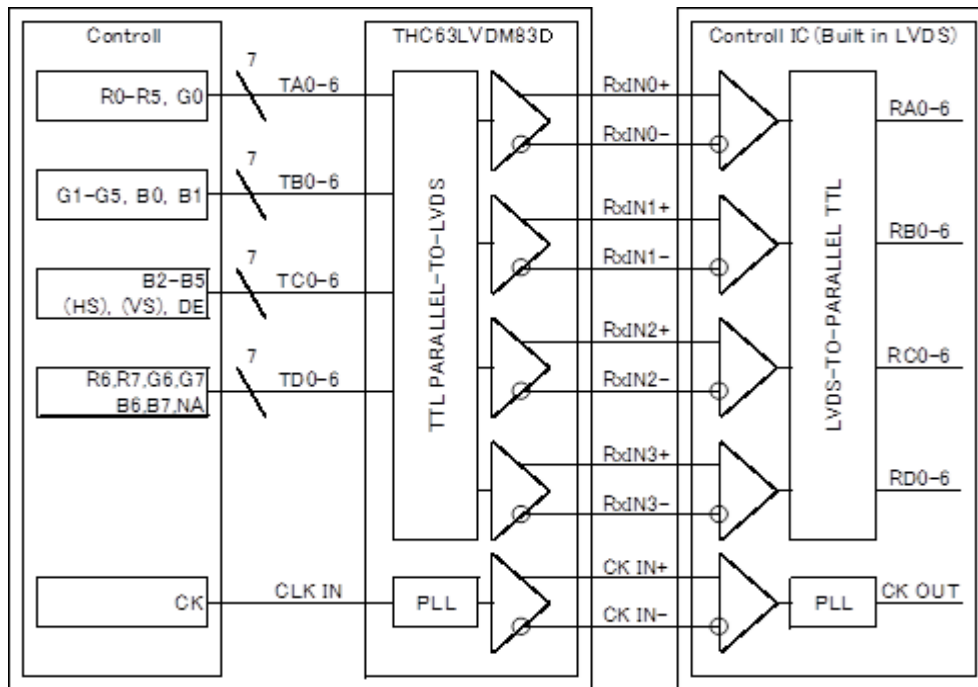


## 8. Input timing characteristics

### 8-1. Timing characteristics


| Item               |                           | Symbol | Min.  | Typ.  | Max.  | Unit    | Note |
|--------------------|---------------------------|--------|-------|-------|-------|---------|------|
| Clock (CK)         | Frequency                 | 1/Tc   | 52    | 65    | 71    | MHz     | 1)   |
| Enable signal (DE) | Horizontal Period         | Th     | 1,114 | 1,344 | 1,400 | Dot     | 2)   |
|                    |                           |        | 15.7  | 20.7  | 23.7  | $\mu s$ |      |
|                    | Horizontal display period | Thd    | 1,024 |       |       | Tc      |      |
|                    | Vertical Period           | Tv     | 778   | 806   | 845   | Line    |      |
|                    | Vertical display period   | Tvd    | 768   |       |       | Th      |      |
| Refresh rate       |                           | fv     | 50    | 60    | 82    | Hz      | 3)   |

- 1) If the display is used under the condition which is out of specifications such as higher clock frequency than specified value, there is a possibility phenomenon such as display error including white display, malfunction and no image may occur. Please use the display under the conditions written in the specification.
- 2) Please set a clock frequency, a vertical dormant period, and the horizontal dormant period so that the Horizontal Period should not reach less than Min. value.
- 3) If the refresh rate reach less than Min. value, the deterioration of the display quality, flicker etc., may occur. ( $fv=1/Tv$ )


#### Vertical Timing Diagram

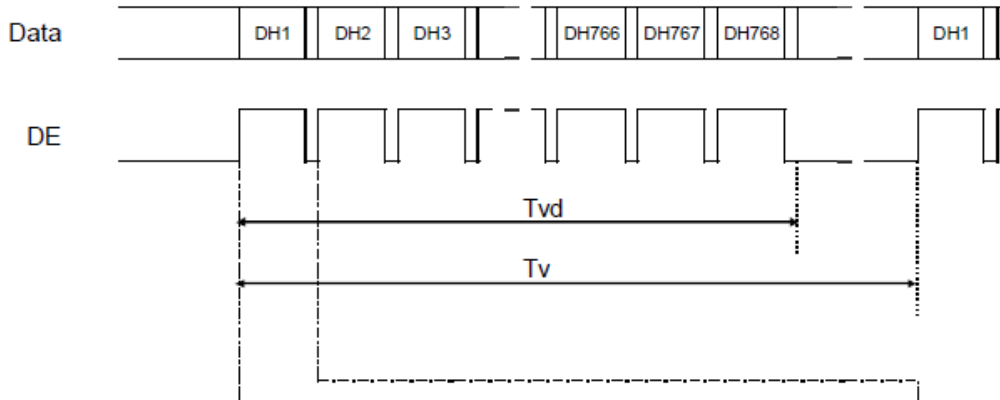

#### Horizontal Timing Diagram

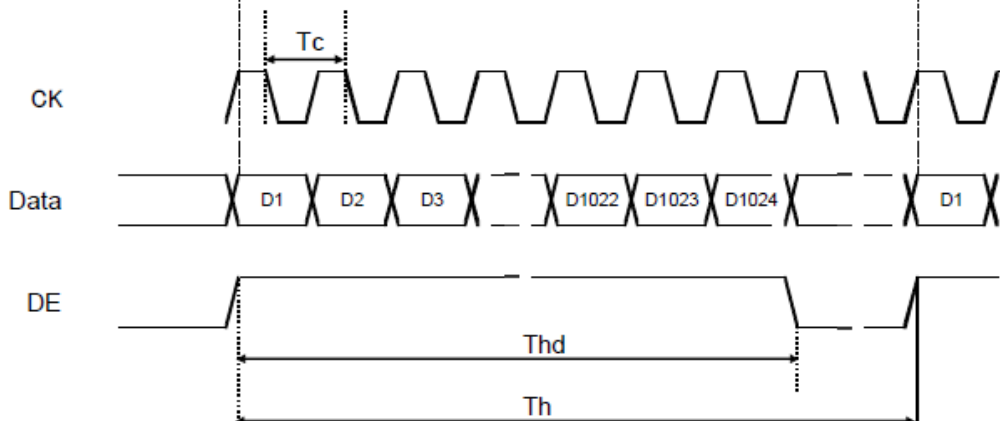

8-2. Input data signals and display position on the screen

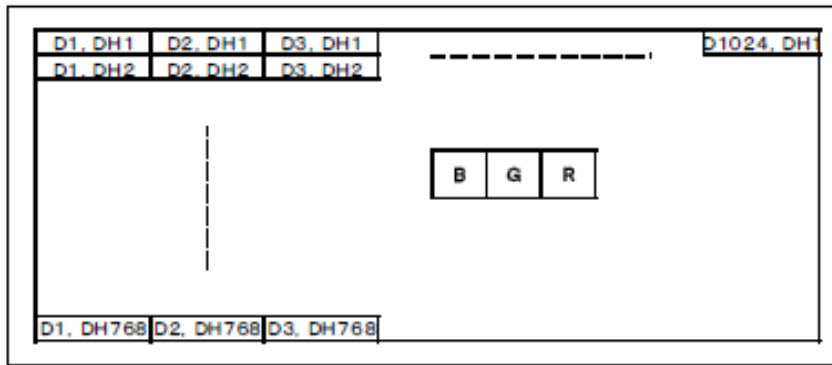



## 11. Precautions for use

### 11-1. Installation of the LCD

- 1) A transparent protection plate shall be added to protect the LCD and its polarizer.
- 2) The LCD shall be installed so that there is no pressure on the LSI chips.
- 3) Since this product is wide viewing product, occurrence level of in-plane unevenness by the external stress is different compared to current normal viewing product. So there is a possibility that in-plane unevenness will be occurred by over twist, strain giving by attaching to LCD, and over pressure to touch panel. Please be careful of stress when designing the housing.
- 4) A transparent protection sheet is attached to the polarizer. Please remove the protection film slowly before use, paying attention to static electricity.

### 11-2. Static electricity

- 1) Since CMOS ICs are mounted directly onto the LCD glass, protection from static electricity is required.
- 2) Workers should use body grounding. Operator should wear ground straps.

### 11-3. LCD operation

- 1) The LCD shall be operated within the limits specified. Operation at values outside of these limits may shorten life, and/or harm display images.
- 2) Please select the best display pattern based on your evaluation because flicker, lines or nonuniformity or unevenness can be visible depending on display patterns.

### 11-4. Storage

- 1) The LCD shall be stored within the temperature and humidity limits specified.  
Store in a dark area, and protect the LCD from direct sunlight or fluorescent light.
- 2) Always store the LCD so that it is free from external pressure onto it.

### 11-5. Usage

- 1) **DO NOT** store in a high humidity environment for extended periods. Polarizer degradation bubbles, and/or peeling off of the polarizer may result.
- 2) The front polarizer is easily scratched or damaged. Prevent touching it with any hard material, and from being pushed or rubbed.
- 3) The LCD screen may be cleaned by wiping the screen surface with a soft cloth or cotton pad using a little Ethanol.
- 4) Water may cause damage or discoloration of the polarizer. Clean condensation or moisture from any source immediately.
- 5) Always keep the LCD free from condensation during testing. Condensation may permanently spot or stain the polarizer.
- 6) Do not disassemble LCD because it will result in damage.
- 7) This Kyocera LCD has been specifically designed for use in general electronic devices, but not for use in a special environment such as usage in an active gas. Hence, when the LCD is supposed to be used in a special environment, evaluate the LCD thoroughly beforehand and do not expose the LCD to chemicals such as an active gas.
- 8) Please do not use solid-base image pattern for long hours because a temporary afterimage may appear. We recommend using screen saver etc. in cases where a solid-base image pattern must be used.
- 9) Liquid crystal may leak when the LCD is broken. Be careful not to let the fluid go into your eyes and mouth. In the case the fluid touches your body; rinse it off right away with water and soap.

## 12. Reliability test data

| Test item                      | Test condition                       | Test time | Judgement  |
|--------------------------------|--------------------------------------|-----------|--|
| High temp. atmosphere          | 80°C                                 | 240h      | Display function : No defect<br>Display quality : No defect<br>Current consumption : No defect |
| Low temp. atmosphere           | -30°C                                | 240h      | Display function : No defect<br>Display quality : No defect<br>Current consumption : No defect |
| High temp. humidity atmosphere | 40°C 90% RH                          | 240h      | Display function : No defect<br>Display quality : No defect<br>Current consumption : No defect |
| Temp. cycle                    | -30°C 0.5h<br>R.T. 0.5h<br>80°C 0.5h | 10cycles  | Display function : No defect<br>Display quality : No defect<br>Current consumption : No defect |
| High temp. operation           | 80°C                                 | 500h      | Display function : No defect<br>Display quality : No defect<br>Current consumption : No defect |

- 1) Each test item uses a test LCD only once. The tested LCD is not used in any other tests.
- 2) The LCD is tested in circumstances in which there is no condensation.
- 3) The reliability test is not an out-going inspection.
- 4) The result of the reliability test is for your reference purpose only.  
The reliability test is conducted only to examine the LCD's capability.





|          |                       |
|----------|-----------------------|
| Spec No. | TQ3C-8EAF0-E2YAL84-02 |
| Date     | February 4, 2026      |

**KYOCERA INSPECTION STANDARD**

**TYPE : TCG121XGLPBPNN-AN40-TA**

KYOCERA CORPORATION

|                        |                                |                |                    |                           |
|------------------------|--------------------------------|----------------|--------------------|---------------------------|
| Original<br>Issue Date | Designed by: Engineering dept. |                |                    | Confirmed by:<br>QA dept. |
|                        | Prepared                       | Checked        | Approved           | Approved                  |
| April 5, 2022          | <i>K. Komurasaki</i>           | <i>Y. Hata</i> | <i>I. Kawajiri</i> | <i>T. Sawada</i>          |

|                                   |                                    |           |
|-----------------------------------|------------------------------------|-----------|
| Spec No.<br>TQ3C-8EAF0-E2YAL84-02 | Part No.<br>TCG121XGLPBPNN-AN40-TA | Page<br>- |
|-----------------------------------|------------------------------------|-----------|

### Revision record

| Date             |               | Designed by : Engineering dept. |  |                    | Confirmed by :<br>QA dept. |
|------------------|---------------|---------------------------------|--|--------------------|----------------------------|
|                  |               | Prepared                        | Checked  | Approved           | Approved                   |
| February 4, 2026 |               | <i>K. Komurasaki</i>            | <i>Y. Hata</i>   | <i>I. Kawajiri</i> | <i>T. Sawada</i>           |
| Rev. No.         | Date          | Page                            | Descriptions   |                    |                            |
| 01               | Mar. 11, 2025 | -                               | Remove the CONFIDENTIAL notation.  |                    |                            |
|                  |               | -                               | Color variation (Mura)<br>Modify the judgement standard.   |                    |                            |
| 02               | Feb. 4, 2026  | 1                               | General<br>Added inspection conditions for ND filter   |                    |                            |
|                  |               |                                 | Black dot defect<br>Changed "Black dot defect" to "Black dot defect (including circular ones)" and added description |                    |                            |
|                  |               | 2                               | Defect (in LCD glass)<br>Changed "White dot, Dark dot (Circle)" to "Circular white dots and circular black dots"     |                    |                            |
|                  |               |                                 |  |                    |                            |

## Visuals specification

### 1) Note

|                               |  | Note   |   |  |
|-------------------------------|--|--|---|--|
| General                       | <p>1. Customer identified anomalies not defined within this inspection standard shall be reviewed by Kyocera, and an additional standard shall be determined by mutual consent.</p> <p>2. This inspection standard about the image quality shall be applied to any defect within the active area and shall not be applicable to outside of the area.</p> <p>3. Inspection conditions<br/>                     Luminance: 500 Lux min.<br/>                     Inspection distance (H1): 300 mm<br/>                     Distance between LCD panel surface and ND filter (H2):<br/> <math>0 &lt; H2 &lt; 30</math> mm<br/>                     *ND filters are placed parallel to the LCD panel.<br/>                     Temperature: <math>25 \pm 5^\circ\text{C}</math><br/>                     Direction: Directly above</p> |  |   |  |
| Definition of inspection item | Dot defect   | Bright dot defect  | <p>The dot is constantly “on” when power applied to the LCD, even when all “Black” data sent to the screen.</p> <p>Inspection tool: 5% Transparency neutral density filter.</p> <p>Count dot: If the dot is visible through the filter.</p> <p>Don't count dot: If the dot is not visible through the filter.</p> |  |
|                               |  | Black dot defect (Including circular ones)                     | <p>The dot is constantly “off” when power applied to the LCD, even when all “White” data sent to the screen.</p> <p>Similar size compared to bright dot. Circular black dots shall be evaluated according to the criteria for circular white dots and circular black dots.</p>                                    |  |
|                               |  | White dot (Circular/foreign particle)                          | <p>Pixel works electrically, however, circular/foreign particle makes dot appear to be “on” even when all “Black” data is sent to the screen. Circular black dots shall be evaluated according to the criteria for circular white dots and circular black dots.</p>   |  |
|                               |  | Adjacent dot   | <p>Adjacent dot defect is defined as two or more bright dot defects or black dot defects.</p>   |  |
|                               | External inspection  | Bubble, Scratch, Foreign particle (Polarizer, Cell, Backlight) | Visible operating (all pixels “Black” or “White”) and non operating.  |  |
|                               | Appearance inspection  | Does not satisfy the value at the spec.                        |   |  |
| Definition of size            | <p>Definition of circle size</p> <p>a: major axis, b: minor axis<br/> <math>d = (a + b) / 2</math></p>   | <p>Definition of linear size</p>                               |   |  |

2) Standard

| Classification   |                     | Inspection item  |  | Judgement standard   |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
|--|---------------------|--|--|--|-------------------|-------------------|-------------------|-------------------|--------------------|--------------------|---------------------|--------------------|--------------------|--------------------|-----------|-----------|-----------|-----------|---|----------------------------------|
| Defect<br>(in LCD<br>glass)  | Single<br>dot       | Bright dot defect  |  | Acceptable number  | : 4               |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
|  |                     | Black dot defect   |  | Acceptable number  | : 5               |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
|  | Adjacent<br>dot     | 2 dots   | Bright<br>dot defect   | Acceptable number  | : 2               |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
|  |                     |  | Black dot<br>defect  | Acceptable number  | : 3               |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
|  |                     | 3 or more dots   |  | Acceptable number  | : 0               |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
|  | Total dot defects   |  |  |  | Acceptable number | : 5 Max           |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
|  | Others              | Circular white dots<br>and circular black<br>dots  |  | <table border="1"> <thead> <tr> <th>Size (mm)</th> <th>Acceptable number</th> </tr> </thead> <tbody> <tr> <td><math>d \leq 0.2</math></td> <td>(Neglected)</td> </tr> <tr> <td><math>0.2 &lt; d \leq 0.4</math></td> <td>5</td> </tr> <tr> <td><math>0.4 &lt; d \leq 0.5</math></td> <td>3</td> </tr> <tr> <td><math>0.5 &lt; d</math></td> <td>0</td> </tr> </tbody> </table> |                   |                   | Size (mm)         | Acceptable number | $d \leq 0.2$       | (Neglected)        | $0.2 < d \leq 0.4$  | 5                  | $0.4 < d \leq 0.5$ | 3                  | $0.5 < d$ | 0         |           |           |   |                                  |
| Size (mm)  | Acceptable number   |  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
| $d \leq 0.2$   | (Neglected)         |  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
| $0.2 < d \leq 0.4$   | 5                   |  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
| $0.4 < d \leq 0.5$   | 3                   |  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
| $0.5 < d$  | 0                   |  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
| External inspection<br>(Defect on<br>Polarizer or<br>between Polarizer<br>and LCD glass) | Polarizer (Scratch) |  | <table border="1"> <thead> <tr> <th>Width (mm)</th> <th>Length (mm)</th> <th>Acceptable number</th> </tr> </thead> <tbody> <tr> <td><math>W \leq 0.1</math></td> <td>—</td> <td>(Neglected)</td> </tr> <tr> <td rowspan="2"><math>0.1 &lt; W \leq 0.3</math></td> <td><math>L \leq 5.0</math></td> <td>(Neglected)</td> </tr> <tr> <td><math>5.0 &lt; L</math></td> <td>0</td> </tr> <tr> <td><math>0.3 &lt; W</math></td> <td>—</td> <td>0</td> </tr> </tbody> </table> |  |                   | Width (mm)        | Length (mm)       | Acceptable number | $W \leq 0.1$       | —                  | (Neglected)         | $0.1 < W \leq 0.3$ | $L \leq 5.0$       | (Neglected)        | $5.0 < L$ | 0         | $0.3 < W$ | —         | 0 |                                  |
|  | Width (mm)          | Length (mm)  | Acceptable number  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
|  | $W \leq 0.1$        | —  | (Neglected)  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
|  | $0.1 < W \leq 0.3$  | $L \leq 5.0$   | (Neglected)  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
|  |                     | $5.0 < L$  | 0  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
|  | $0.3 < W$           | —  | 0  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
|  | Polarizer (Bubble)  |  | <table border="1"> <thead> <tr> <th>Size (mm)</th> <th>Acceptable number</th> </tr> </thead> <tbody> <tr> <td><math>d \leq 0.2</math></td> <td>(Neglected)</td> </tr> <tr> <td><math>0.2 &lt; d \leq 0.3</math></td> <td>5</td> </tr> <tr> <td><math>0.3 &lt; d \leq 0.5</math></td> <td>3</td> </tr> <tr> <td><math>0.5 &lt; d</math></td> <td>0</td> </tr> </tbody> </table>   |  |                   | Size (mm)         | Acceptable number | $d \leq 0.2$      | (Neglected)        | $0.2 < d \leq 0.3$ | 5                   | $0.3 < d \leq 0.5$ | 3                  | $0.5 < d$          | 0         |           |           |           |   |                                  |
|  | Size (mm)           | Acceptable number  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
|  | $d \leq 0.2$        | (Neglected)  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
|  | $0.2 < d \leq 0.3$  | 5  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
| $0.3 < d \leq 0.5$   | 3                   |  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
| $0.5 < d$  | 0                   |  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
| Foreign particle<br>(Circular shape)   |                     | <table border="1"> <thead> <tr> <th>Size (mm)</th> <th>Acceptable number</th> </tr> </thead> <tbody> <tr> <td><math>d \leq 0.2</math></td> <td>(Neglected)</td> </tr> <tr> <td><math>0.2 &lt; d \leq 0.4</math></td> <td>5</td> </tr> <tr> <td><math>0.4 &lt; d \leq 0.5</math></td> <td>3</td> </tr> <tr> <td><math>0.5 &lt; d</math></td> <td>0</td> </tr> </tbody> </table>   |  |  | Size (mm)         | Acceptable number | $d \leq 0.2$      | (Neglected)       | $0.2 < d \leq 0.4$ | 5                  | $0.4 < d \leq 0.5$  | 3                  | $0.5 < d$          | 0                  |           |           |           |           |   |                                  |
| Size (mm)  | Acceptable number   |  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
| $d \leq 0.2$   | (Neglected)         |  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
| $0.2 < d \leq 0.4$   | 5                   |  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
| $0.4 < d \leq 0.5$   | 3                   |  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
| $0.5 < d$  | 0                   |  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
| Foreign particle<br>(Linear shape)<br>Scratch  |                     | <table border="1"> <thead> <tr> <th>Width (mm)</th> <th>Length (mm)</th> <th>Acceptable number</th> </tr> </thead> <tbody> <tr> <td><math>W \leq 0.03</math></td> <td>—</td> <td>(Neglected)</td> </tr> <tr> <td rowspan="3"><math>0.03 &lt; W \leq 0.1</math></td> <td><math>L \leq 2.0</math></td> <td>(Neglected)</td> </tr> <tr> <td><math>2.0 &lt; L \leq 4.0</math></td> <td>3</td> </tr> <tr> <td><math>4.0 &lt; L</math></td> <td>0</td> </tr> <tr> <td><math>0.1 &lt; W</math></td> <td>—</td> <td>(According to<br/>circular shape)</td> </tr> </tbody> </table> |  |  | Width (mm)        | Length (mm)       | Acceptable number | $W \leq 0.03$     | —                  | (Neglected)        | $0.03 < W \leq 0.1$ | $L \leq 2.0$       | (Neglected)        | $2.0 < L \leq 4.0$ | 3         | $4.0 < L$ | 0         | $0.1 < W$ | — | (According to<br>circular shape) |
| Width (mm)   | Length (mm)         | Acceptable number  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
| $W \leq 0.03$  | —                   | (Neglected)  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
| $0.03 < W \leq 0.1$  | $L \leq 2.0$        | (Neglected)  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
|  | $2.0 < L \leq 4.0$  | 3  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
|  | $4.0 < L$           | 0  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
| $0.1 < W$  | —                   | (According to<br>circular shape)   |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |
| Color variation<br>(Mura)  |                     | Not visible through 5% ND filter.  |  |  |                   |                   |                   |                   |                    |                    |                     |                    |                    |                    |           |           |           |           |   |                                  |

|          |                       |
|----------|-----------------------|
| Spec No. | TQ3C-8EAF0-E3YAL84-01 |
| Date     | March 10, 2025        |

**KYOCERA PACKAGING STANDARD**

**TYPE : TCG121XGLPBPNN-AN40-TA**

KYOCERA CORPORATION


|                        |                                |                 |                    |                           |
|------------------------|--------------------------------|-----------------|--------------------|---------------------------|
| Original<br>Issue Date | Designed by: Engineering dept. |                 |                    | Confirmed by:<br>QA dept. |
|                        | Prepared                       | Checked         | Approved           | Approved                  |
| April 5, 2022          | <i>Y. Yamazaki</i>             | <i>T. Fukui</i> | <i>I. Kawajiri</i> | <i>T. Sawada</i>          |

|                                   |                                    |           |
|-----------------------------------|------------------------------------|-----------|
| Spec No.<br>TQ3C-8EAF0-E3YAL84-01 | Part No.<br>TCG121XGLPBPNN-AN40-TA | Page<br>- |
|-----------------------------------|------------------------------------|-----------|


### Revision record

| Date           | Designed by : Engineering dept. |                 |                                   | Confirmed by :<br>QA dept. |
|----------------|---------------------------------|-----------------|-----------------------------------|----------------------------|
|                | Prepared                        | Checked         | Approved                          | Approved                   |
| March 10, 2025 | <i>Y. Yamazaki</i>              | <i>T. Fukui</i> | <i>I. Kawajiri</i>                | <i>T. Sawada</i>           |
| Rev. No.       | Date                            | Page            | Descriptions                      |                            |
| 01             | Mar. 10, 2025                   | -               | Remove the CONFIDENTIAL notation. |                            |
|                |                                 |                 |                                   |                            |


1. How to store LCDs in the pad

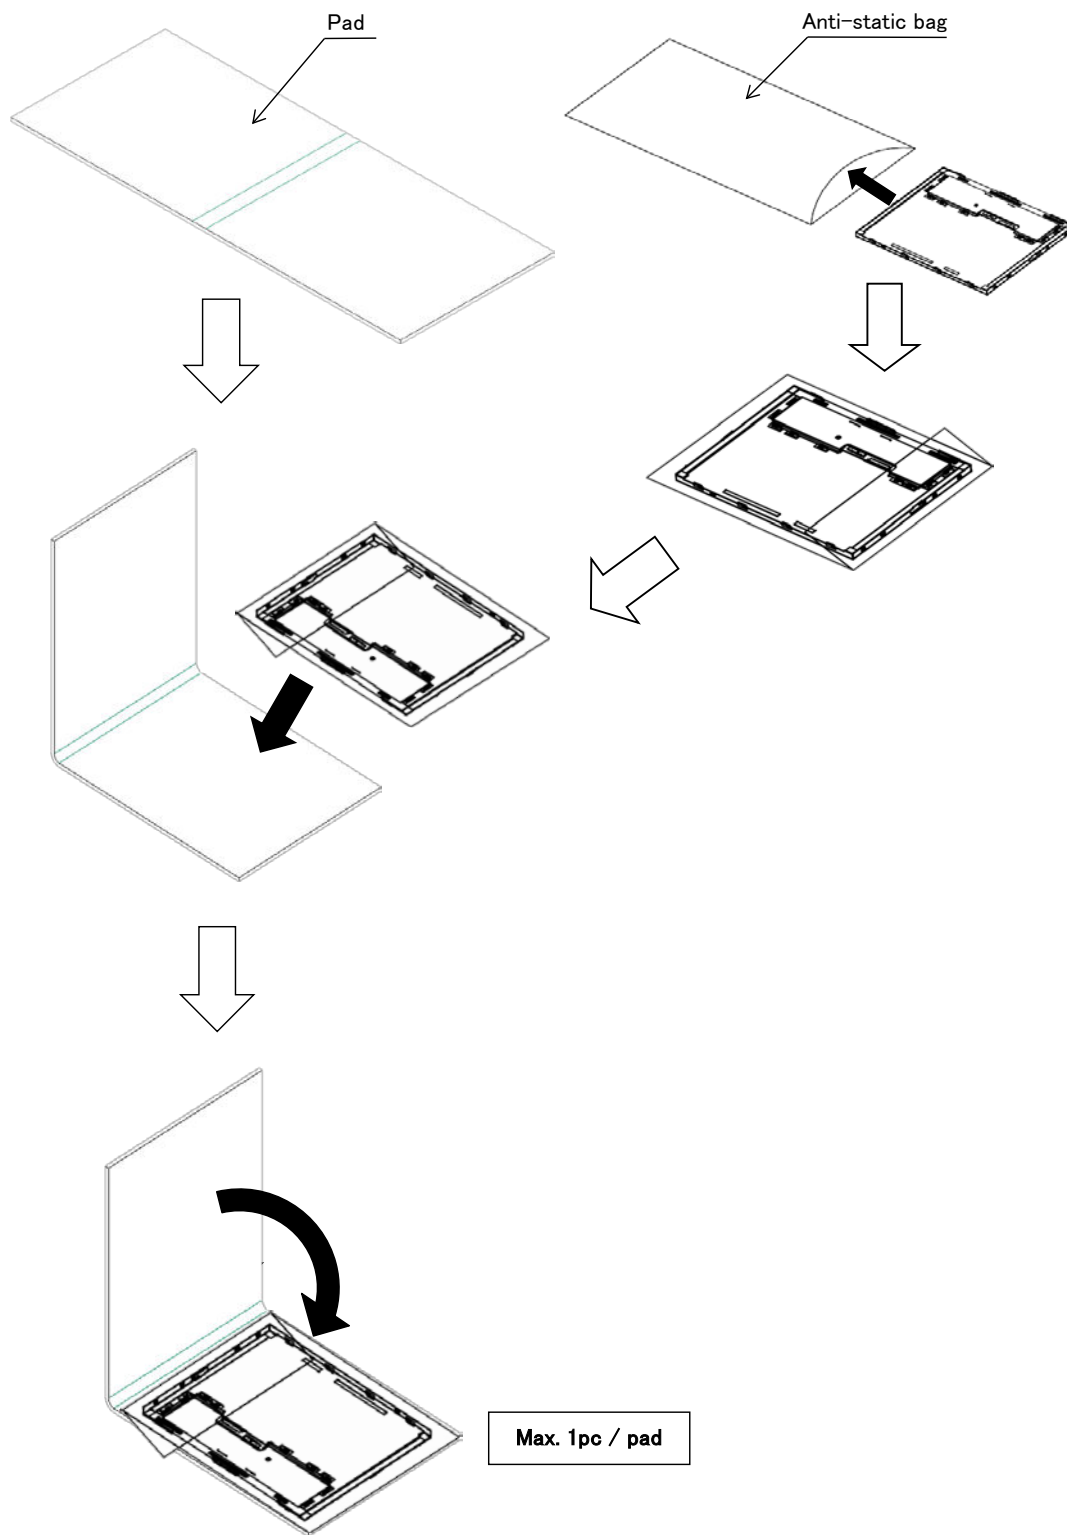

2. How to store LCDs in the box

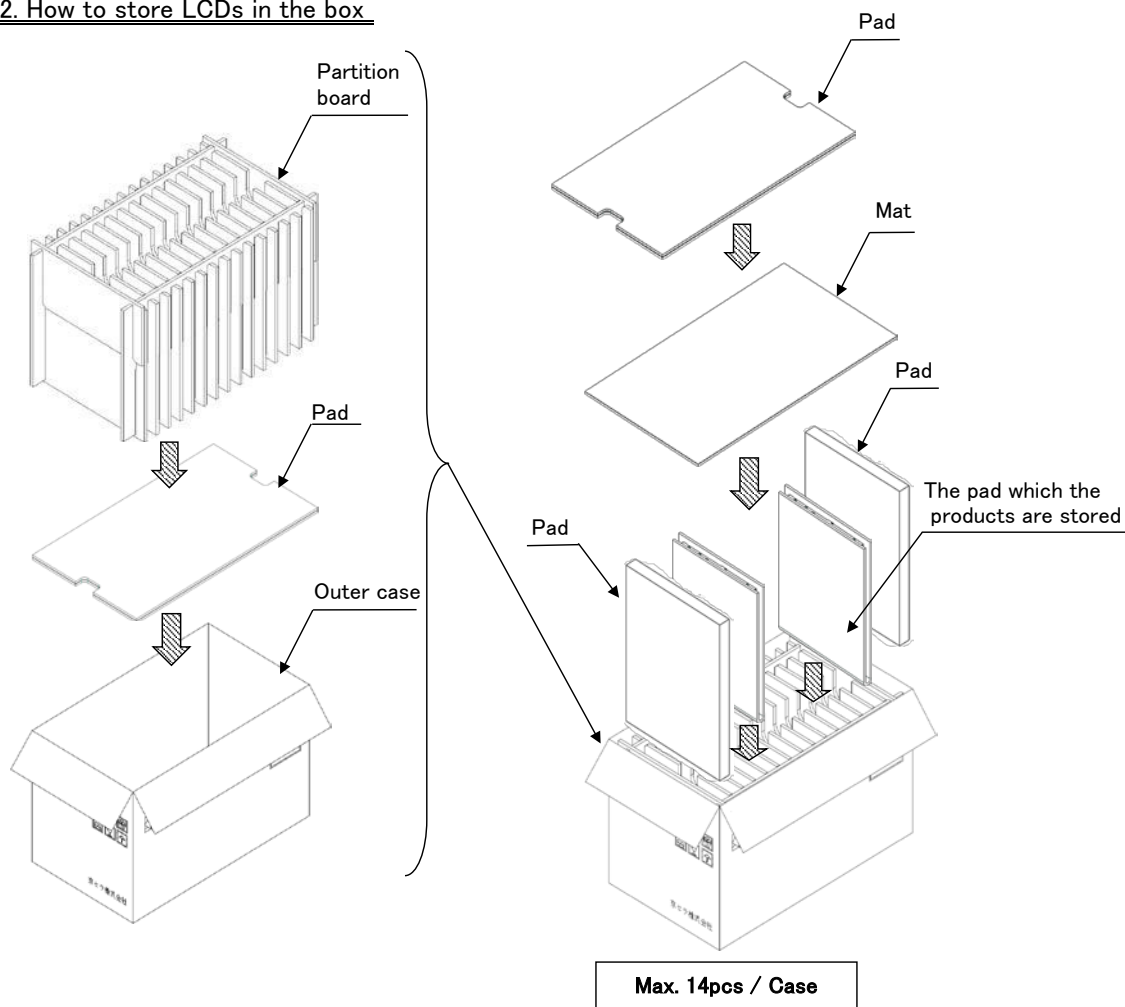

3. Location of the labels

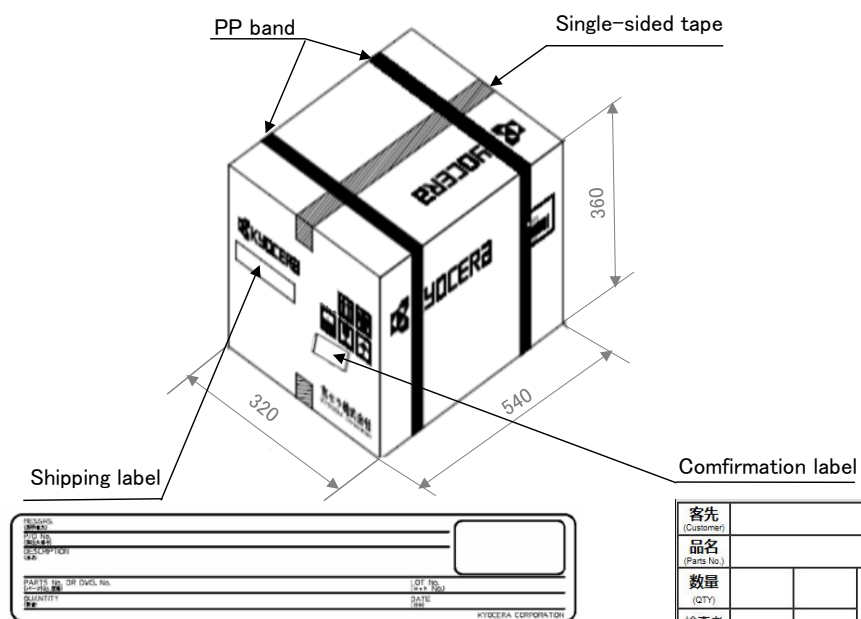

|                                   |  |                     |
|-----------------------------------|--|---------------------|
| 品名<br>数量<br>検査者<br>検査者            |  | KYOCERA CORPORATION |
| PARTS NO. OR DWG. No.<br>QUANTITY |  |                     |

|                  |  |         |
|------------------|--|---------|
| 客先<br>(Customer) |  | 京セラ株式会社 |
| 品名<br>(Part No.) |  |         |
| 数量<br>(QTY)      |  |         |
| 検査者<br>(Check)   |  |         |
| 検査者<br>(Check)   |  |         |