

**PRODUCT
NEWS****Product Discontinuation
Notices**Issue Date
December 12, 2025
20251210_DOP_00003**NOTE:**

This PCN is intended for use exclusively in EUROPE, Middle East and Africa.

Product Discontinuation

Signal Relay

**G6E series****Recommended Replacement**

Signal Relay

**G6S series****[Final order entry date]**

The end of March, 2027

[Date of The Last Shipping]

The end of June, 2027

[Caution on recommended replacement]

Since it is not a directly compatible product, the external dimensions, wiring connections, and mounting dimensions will differ

[Difference from discontinued product]

| Recommended replacement Model | Body Color | Dimensions | Wire connection | Mounting Dimensions | Characteristics | Operation ratings | Operation methods |
|-------------------------------|------------|------------|-----------------|---------------------|-----------------|-------------------|-------------------|
| G6S-2 Series | -- | -- | -- | -- | * | * | ** |
| G6SU-2 Series | -- | -- | -- | -- | * | * | ** |
| G6SK-2 Series | -- | -- | -- | -- | * | * | ** |
| | | | | | | | |

** : Compatible

* : The change is a little/Almost compatible

-- : Not compatible

- : No corresponding specification

[Product Discontinuation and recommended replacement]

| Product discontinuation | Recommended replacement |
|-------------------------|-------------------------|
| G6E-134C-US DC12 | G6S-2 DC12 |
| G6E-134C-US DC24 | G6S-2 DC24 |
| G6E-134C-US DC5 | G6S-2 DC5 |
| G6E-134P-ST-US DC12 | G6S-2 DC12 |
| G6E-134P-ST-US DC24 | G6S-2 DC24 |
| G6E-134P-ST-US DC3 | G6S-2 DC3 |
| G6E-134P-ST-US DC48 | G6S-2 DC48 |
| G6E-134P-ST-US DC5 | G6S-2 DC5 |
| G6E-134P-ST-US DC6 | G6S-2 DC6 |
| G6E-134P-ST-US DC9 | G6S-2 DC9 |
| G6E-134P-US DC12 | G6S-2 DC12 |
| G6E-134P-US DC24 | G6S-2 DC24 |

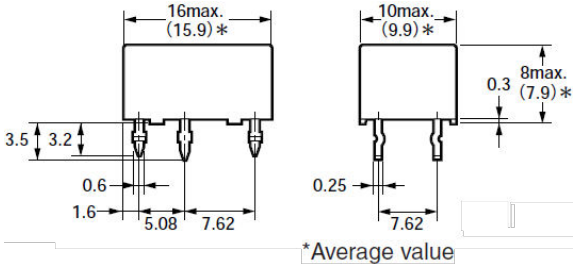
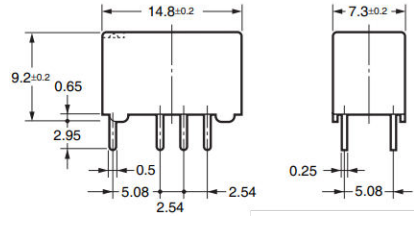
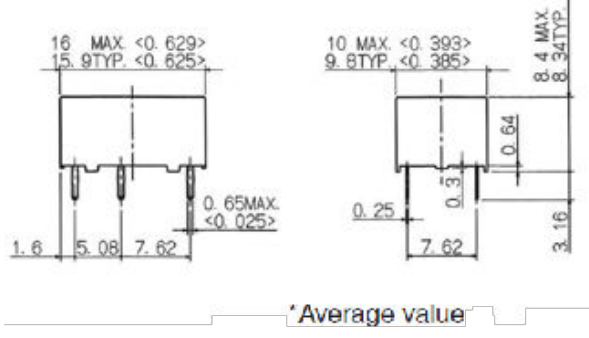
| Product discontinuation | Recommended replacement |
|-------------------------|----------------------------|
| G6E-134P-US DC3 | G6S-2 DC3 |
| G6E-134P-US DC48 | G6S-2 DC48 |
| G6E-134P-US DC5 | G6S-2 DC5 |
| G6E-134P-US DC6 | G6S-2 DC6 |
| G6E-134P-US DC9 | G6S-2 DC9 |
| G6E-134P-US-U DC12 | G6S-2 DC12 |
| G6E-134P-US-U DC24 | G6S-2 DC24 |
| G6E-134P-US-U DC48 | G6S-2 DC48 |
| G6E-134P-US-U DC5 | G6S-2 DC5 |
| G6E-134P-US-U DC6 | G6S-2 DC6 |
| G6E-134P-US-U DC9 | G6S-2 DC9 |
| G6E-134PL-ST-US DC12 | G6S-2 DC12 |
| G6E-134PL-ST-US DC24 | G6S-2 DC24 |
| G6E-134PL-ST-US DC3 | G6S-2 DC3 |
| G6E-134PL-ST-US DC5 | G6S-2 DC5 |
| G6E-134PL-ST-US DC9 | G6S-2 DC9 |
| G6E-134PL-US DC12 | G6S-2 DC12 |
| G6E-134PL-US DC24 | G6S-2 DC24 |
| G6E-134PL-US DC3 | G6S-2 DC3 |
| G6E-134PL-US DC48 | G6S-2 DC48 |
| G6E-134PL-US DC5 | G6S-2 DC5 |
| G6E-134PL-US DC6 | G6S-2 DC6 |
| G6E-134PL-US DC9 | G6S-2 DC9 |
| G6E-134PL-US-U DC12 | G6S-2 DC12 |
| G6E-134PL-US-U DC24 | G6S-2 DC24 |
| G6E-134PL-US-U DC48 | G6S-2 DC48 |
| G6E-134PL-US-U DC5 | G6S-2 DC5 |
| G6E-194P-US DC12 | G6S-2 DC12 |
| G6E-194P-US DC24 | G6S-2 DC24 |
| G6E-194P-US DC5 | G6S-2 DC5 |
| G6EK-134P-1-US DC12 | G6SK-2 DC12 |
| G6EK-134P-1-US DC24 | G6SK-2 DC24 |
| G6EK-134P-1-US DC5 | G6SK-2 DC5 |
| G6EK-134P-1-US DC9 | G6SK-2 DC9 |
| G6EK-134P-ST-US DC1.5 | No recommended replacement |
| G6EK-134P-ST-US DC12 | G6SK-2 DC12 |
| G6EK-134P-ST-US DC24 | G6SK-2 DC24 |
| G6EK-134P-ST-US DC3 | G6SK-2 DC3 |
| G6EK-134P-ST-US DC5 | G6SK-2 DC5 |
| G6EK-134P-ST-US DC6 | G6SK-2 DC6 |
| G6EK-134P-ST-US DC9 | G6SK-2 DC9 |
| G6EK-134P-US DC12 | G6SK-2 DC12 |
| G6EK-134P-US DC24 | G6SK-2 DC24 |
| G6EK-134P-US DC3 | G6SK-2 DC3 |
| G6EK-134P-US DC5 | G6SK-2 DC5 |
| G6EK-134P-US DC6 | G6SK-2 DC6 |
| G6EK-134P-US DC9 | G6SK-2 DC9 |
| G6EK-134P-US-U DC12 | G6SK-2 DC12 |
| G6EK-134P-US-U DC24 | G6SK-2 DC24 |

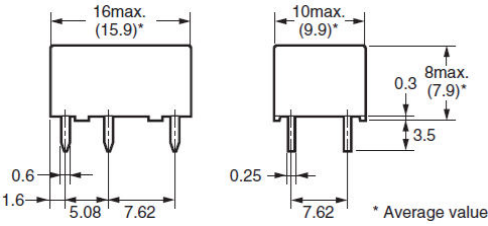
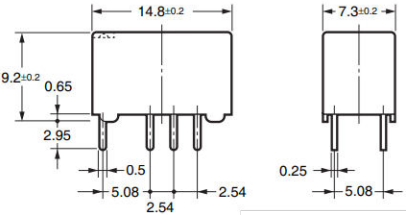
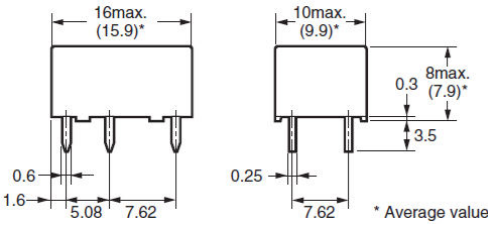
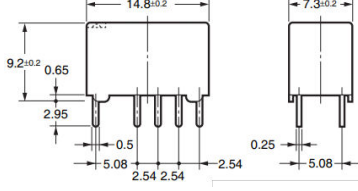
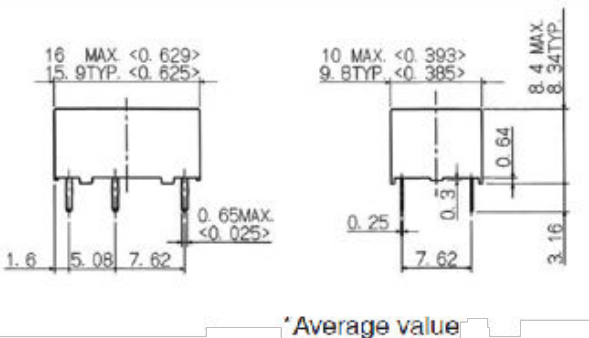
| Product discontinuation | Recommended replacement |
|--------------------------------|--------------------------------|
| G6EK-134P-US-U DC3 | G6SK-2 DC3 |
| G6EK-134P-US-U DC5 | G6SK-2 DC5 |
| G6EK-134PL-1-US DC12 | G6SK-2 DC12 |
| G6EK-134PL-ST-US DC12 | G6SK-2 DC12 |
| G6EK-134PL-ST-US DC24 | G6SK-2 DC24 |
| G6EK-134PL-ST-US DC3 | G6SK-2 DC3 |
| G6EK-134PL-ST-US DC5 | G6SK-2 DC5 |
| G6EK-134PL-ST-US DC6 | G6SK-2 DC6 |
| G6EK-134PL-US DC12 | G6SK-2 DC12 |
| G6EK-134PL-US DC24 | G6SK-2 DC24 |
| G6EK-134PL-US DC5 | G6SK-2 DC5 |
| G6EK-134PL-US DC6 | G6SK-2 DC6 |
| G6EU-134P-ST-US DC12 | G6SU-2 DC12 |
| G6EU-134P-US DC12 | G6SU-2 DC12 |
| G6EU-134P-US DC24 | G6SU-2 DC24 |
| G6EU-134P-US DC3 | G6SU-2 DC3 |
| G6EU-134P-US DC5 | G6SU-2 DC5 |
| G6EU-134P-US DC6 | G6SU-2 DC6 |
| G6EU-134P-US DC9 | G6SU-2 DC9 |
| G6EU-134P-US-U DC12 | G6SU-2 DC12 |
| G6EU-134P-US-U DC3 | G6SU-2 DC3 |
| G6EU-134P-US-U DC5 | G6SU-2 DC5 |
| G6EU-134PL-US DC12 | G6SU-2 DC12 |
| G6EU-134PL-US DC24 | G6SU-2 DC24 |

[Body color]








| Product discontinuation | Recommendable replacement |
|---|--|
| G6E-134C-US G6E-134(P,PL)-ST-US G6E-1(3,9)4(P,PL)-US(-U) G6EK-134(P,PL)-US,1-US,US-U) G6EK-134(P,PL)-ST-US G6EU-134(P,PL)-US(-U) | G6S-2 // // G6SK-2 // G6SU-2 |
| Black | Ivory |

[Dimensions]

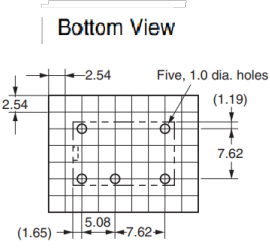
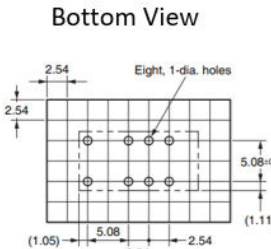
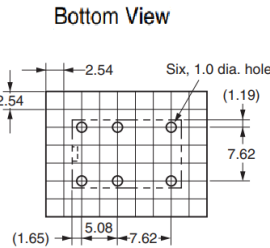
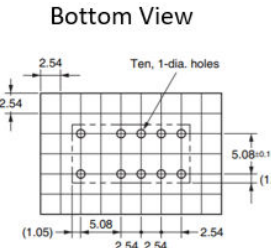
| Product discontinuation | Recommendable replacement |
|--|--|
| <p>G6E-134C-US</p>  <p>**Terminal shape: Self-supporting terminal **Only the terminals at the four corners are processed into self-supporting terminals **Standoff height: 0.3mm **Outline(Max.): 16 x 10 x 8mm</p> | <p>G6S-2</p>  <p>**Terminal shape: PCB terminal **Standoff height: 0.65mm **Outline(Max.): 15 x 7.5 x 9.4mm</p> |
| <p>G6E(U)-134(P, PL)-ST-US</p>  <p>**Terminal shape: PCB terminal **Standoff height: 0.64mm **Outline(Max.): 16 x 10 x 8.4mm</p> | Ditto |

| Product discontinuation | Recommendable replacement |
|---|---|
| <p>G6E(U)-1(3,9)4(P, PL)-US(-U)</p>  <p>**Terminal shape: PCB terminal **Standoff height: 0.3mm **Outline(Max.): 16 x 10 x 8 mm</p> | <p>G6S(U)-2</p>  <p>**Terminal shape: PCB terminal **Standoff height: 0.65mm **Outline(Max.): 15 x 7.5 x 9.4mm</p> |
| <p>G6EK-134(P, PL)-US, 1-US, US-U)</p>  <p>**Terminal shape: PCB terminal **Standoff height: 0.3mm **Outline(Max.): 16 x 10 x 8 mm</p> | <p>G6SK-2</p>  <p>**Terminal shape: PCB terminal **Standoff height: 0.65mm **Outline(Max.): 15 x 7.5 x 9.4mm</p> |
| <p>G6EK-134(P, PL)-ST-US</p>  <p>**Terminal shape: PCB terminal **Standoff height: 0.64mm **Outline(Max.): 16 x 10 x 8.4mm</p> | <p>G6SK-2</p> <p style="text-align: center;">Ditto</p> |







[Wire connection]

| Product discontinuation | Recommendable replacement |
|---|--|
| <p>G6E-134C-US G6E-1(3,9)4(P, PL)-(US, ST-US, US-U)</p> <p>Bottom View</p>  | <p>G6S-2</p> <p>Bottom View</p>  |
| <p>G6EU-134(P, PL)-(US, ST-US, US-U)</p> <p>Bottom View</p>  | <p>G6SU-2</p> <p>Bottom View</p>  |
| <p>G6EK-134(P, PL)-1-US</p> <p>Bottom View</p>  <p>**The coil polarity is opposite to that of standard products.</p> | <p>G6SK-2</p> <p>Bottom View</p>  |
| <p>G6EK-134(P, PL)-(US, ST-US, US-U)</p> <p>Bottom View</p>  | <p>G6SK-2</p> <p>Ditto</p> |

[Mounting dimensions]

| Product discontinuation | Recommendable replacement |
|--|--|
| <p>G6E-134C-US G6E(U)-1(3,9)4(P, PL)-(US, ST-US, US-U)</p> <p style="text-align: center;">Bottom View</p>  <p>Five, 1.0 dia. holes</p> | <p>G6S(U)-2</p> <p style="text-align: center;">Bottom View</p>  <p>Eight, 1-dia. holes</p> |
| <p>G6EK-134(P, PL)-(US, 1-US, US-U) G6EK-134(P, PL)-ST-US</p> <p style="text-align: center;">Bottom View</p>  <p>Six, 1.0 dia. holes</p> | <p>G6SK-2</p> <p style="text-align: center;">Bottom View</p>  <p>Ten, 1-dia. holes</p> |








[Characteristics / Operation ratings]

| Model | | Product discontinuation | | | Recommended replacement |
|--|--|--|---|--|--|
| | | G6E-134C-US 5,12VDC | G6E-134P-ST-US 3,5,6,9,12,24,48VDC | G6E-134P-US-U 5,6,9,12,24,48VDC | G6S-2 3,5,6,9,12,24,48VDC |
| Contact form | | SPDT(1C) | | | DPDT(2C) |
| Contact type | | Bifurcated crossbar | | | <-- |
| Contact material | | Au-Alloy+Ag | | | <-- |
| Rating | Rated load | Resistive load | 0.4A at 125VAC 100K ops. 2A at 30VDC 500K ops. 3A at 30VDC 200K ops. | | 0.5A at 125VAC 100K ops. 2A at 30VDC 100K ops. |
| | | Inductive load (cos φ=0.4) (L/R=7ms) | 0.2A at 125VAC 100K ops. 1A at 30VDC 500K ops. | | - |
| | Rated carry current | 3A | | 2A | |
| | Max. switching voltage | 250VAC, 220VDC | | <-- | |
| | Max. switching current | 3A | | 2A | |
| | Coil rating :power consumption | 3 to 24VDC :Approx. 200 mW, 48VDC : Approx. 400 mW | | 3 to 12VDC :Approx. 140 mW, 24VDC : Approx. 200 mW 48VDC : Approx. 280 mW | |
| Characteristics | Contact Resistance | | 50 mΩ max. | | 75 mΩ max. |
| | Operating(Set) time | | 5 ms max. | | 4 ms max. |
| | Released(Reset) time | | 5 ms max. | | 4 ms max. |
| | Min. set pulse width | | - | | - |
| | Min. reset pulse width | | - | | - |
| | Insulation Resistance | | 1,000 MΩ min. | | <-- |
| | Withstand Voltage | Between coil and contact | 1,500 VAC 50/60Hz 1min | | 2,000 VAC 50/60Hz 1min |
| | | Between contacts of the same polarity | 1,000 VAC 50/60Hz 1min | | <-- |
| | Impulse withstand voltage | Between coil and contact | 2,500 VAC 10 x 160 μs | | 1,500 VAC 10 x 160 μs |
| | Vibration | Durability | 10 to 55 to 10 Hz 2.5 mm single amplitude (5 mm double amplitude) | | <-- |
| | | Malfunction | 10 to 55 to 10 Hz, 1.65 mm single amplitude (3.3 mm double amplitude) | | <-- |
| | Shock resistance | Durability | 1,000m/s ² | | <-- |
| | | Malfunction | 300m/s ² | | 750m/s ² |
| | Durability | Mechanical | 100,000,000 operations min. | | <-- |
| | | Electrical | AC: 100,000 operations min. / DC: 500,000 operations min. (2A), 200,000 operations min (3A) | | AC/DC 100,000 operations min. |
| | Failure rate P level (Reference) | | 10 μA at 10 m VDC | | <-- |
| | Ambient operating temperature | | -40 deg. C to 70 deg. C | | -40 deg. C to 85 deg. C |
| Ambient operating humidity | | 5 to 85 %RH | | <-- | |
| Weight | | Approx. 2.7.g | | Approx. 2 g | |
| Approved standards | | UL/CSA | | UL/CSA | |
| Dimensions |  <p>Outline(Max.): 16 x 10 x 8mm Terminal shape: Self-supporting terminal</p> | |  <p>Outline(Max.): 16 x 10 x 8.4mm</p> |  <p>Outline(Max.): 16 x 10 x 8mm</p> |  <p>Outline(Max.): 15 x 7.5 x 9.4mm</p> |
| Terminal arrangement /Internal connections |  <p>Bottom View</p> | |  <p>Bottom View</p> | | |

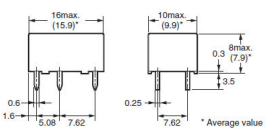
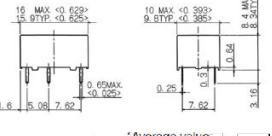
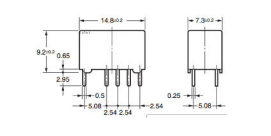



[Characteristics / Operation ratings]

| Model | | Product discontinuation | | | Recommended replacement | |
|--|-------------------------------------|--|---|----------------------------------|--|-------------------------------|
| | | G6E-134PL-US 3,5,6,9,12,24,48 VDC | G6E-134PL-ST-US 3,5,9,12,24 VDC | G6E-134PL-US-U 5,12,24,48 VDC | G6S-2 3,5,6,9,12,24,48 VDC | |
| Contact form | | SPDT(1C) | | | DPDT(2C) | |
| Contact type | | Bifurcated crossbar | | | <-- | |
| Contact material | | Au-Alloy + Ag | | | <-- | |
| Rating | Rated load | Resistive load | 0.4A at 125VAC 100K ops. 2A at 30VDC 500K ops. 3A at 30VDC 200K ops. | | 0.5A at 125VAC 100K ops. 2A at 30VDC 100K ops. | |
| | | Inductive load (cos φ=0.4) (L/R=7ms) | 0.2A at 125VAC 100K ops. 1A at 30VDC 500K ops. | | - | |
| | Rated carry current | 3A | | | 2A | |
| | Max. switching voltage | 250VAC, 220VDC | | | <-- | |
| | Max. switching current | 3A | | | 2A | |
| | Coil rating :power consumption | 3 to 48VDC : Approx. 400 mW | | | 3 to 12VDC : Approx. 140 mW, 24VDC : Approx. 200 mW 48VDC : Approx. 280 mW | |
| Characteristics | Contact Resistance | 50 mΩ max. | | | 75 mΩ max. | |
| | Operating(Set) time | 5 ms max. | | | 4 ms max. | |
| | Released(Reset) time | 5 ms max. | | | 4 ms max. | |
| | Min. set pulse width | - | | | - | |
| | Min. reset pulse width | - | | | - | |
| | Insulation Resistance | 1,000 MΩ min. | | | <-- | |
| | Withstand Voltage | Between coil and contact | 1,500 VAC 50/60Hz 1min | | | 2,000 VAC 50/60Hz 1min |
| | | Between contacts of the same polarity | 1,000 VAC 50/60Hz 1min | | | <-- |
| | Impulse withstand voltage | Between coil and contact | 2,500 VAC 10 x 160 μs | | | 1,500 VAC 10 x 160 μs |
| | Vibration | Durability | 10 to 55 to 10 Hz, 2.5 mm single amplitude (5 mm double amplitude) | | | <-- |
| | | Malfunction | 10 to 55 to 10 Hz, 1.65 mm single amplitude (3.3 mm double amplitude) | | | <-- |
| | Shock resistance | Durability | 1,000m/s ² | | | <-- |
| | | Malfunction | 300m/s ² | | | 750m/s ² |
| | Durability | Mechanical | 100,000,000 operations min. | | | <-- |
| | | Electrical | AC: 100,000 operations min. / DC: 500,000 operations min. (2A), 200,000 operations min (3A) | | | AC/DC 100,000 operations min. |
| | Failure rate P level (Reference) | 10 μA at 10 m VDC | | | <-- | |
| | Ambient operating temperature | -40 deg. C to 70 deg. C | | | -40 deg. C to 85 deg. C | |
| Ambient operating humidity | 5 to 85 %RH | | | <-- | | |
| Weight | Approx. 2.7 g | | | Approx. 2 g | | |
| Approved standards | UL/CSA | | | UL/CSA | | |
| Dimensions | <p>Outline(Max.): 16 x 10 x 8mm</p> | | <p>Outline(Max.): 16 x 10 x 8.4mm</p> | | <p>Outline(Max.): 15 x 7.5 x 9.4mm</p> | |
| Terminal arrangement /Internal connections | <p>Bottom View</p> | | | <p>Bottom View</p> | | |

[Characteristics / Operation ratings]

| Model | | Product discontinuation | | | Recommended replacement |
|--|--|--|---|---------------------------------|--|
| | | G6EK-134P-1-US 5,9,12,24 VDC | G6EK-134P-ST-US 1.5,3,5,6,9,12,24 VDC | G6EK-134P-US-U 3,5,12,24 VDC | G6SK-2 3,5,6,9,12,24 VDC |
| Contact form | | SPDT(1C) | | | DPDT(2C) |
| Contact type | | Bifurcated crossbar | | | <-- |
| Contact material | | Au-Alloy+Ag | | | <-- |
| Rating | Rated load | Resistive load | 0.4A at 125VAC 100K ops. 2A at 30VDC 500K ops. 3A at 30VDC 200K ops. | | 0.5A at 125VAC 100K ops. 2A at 30VDC 100K ops. |
| | | Inductive load (cos φ=0.4) (L/R=7ms) | 0.2A at 125VAC 100K ops. 1A at 30VDC 500K ops. | | - |
| | Rated carry current | 3A | | | 2A |
| | Max. switching voltage | 250VAC, 220VDC | | | <-- |
| | Max. switching current | 3A | | | 2A |
| | Coil rating ,power consumption | 1.5 to 24VDC :Approx. 200 mW | | | 3 to 12VDC :Approx. 200 mW 24VDC :Approx. 300 mW |
| Characteristics | Contact Resistance | | 50 mΩ max. | | 75 mΩ max. |
| | Operating(Set) time | | 5 ms max. | | 4 ms max. |
| | Released(Reset) time | | 5 ms max. | | 4 ms max. |
| | Min. set pulse width | | 15ms | | 10ms |
| | Min. reset pulse width | | 15ms | | 10ms |
| | Insulation Resistance | | 1,000 MΩ min. | | <-- |
| | Withstand Voltage | Between coil and contact | 1,500 VAC 50/60Hz 1min | | 1,000 VAC 50/60Hz 1min |
| | | Between contacts of the same polarity | 1,000 VAC 50/60Hz 1min | | <-- |
| | | Between set and reset coil | - | | 500 VAC 50/60Hz 1min |
| | Impulse withstand voltage | Between coil and contact | 2,500 VAC 10 x 160 μs | | 1,500 VAC 10 x 160 μs |
| | Vibration | Durability | 10 to 55 to 10 Hz 2.5 mm single amplitude (5 mm double amplitude) | | <-- |
| | | Malfunction | 10 to 55 to 10 Hz, 1.65 mm single amplitude (3.3 mm double amplitude) | | <-- |
| | Shock resistance | Durability | 1,000m/s ² | | <-- |
| | | Malfunction | 300m/s ² | | 750m/s ² |
| | Durability | Mechanical | 100,000,000 operations min. | | <-- |
| | | Electrical | AC: 100,000 operations min. / DC: 500,000 operations min. (2A), 200,000 operations min (3A) | | AC/DC 100,000 operations min. |
| | Failure rate P level (Reference) | | 10 μA at 10 m VDC | | <-- |
| | Ambient operating temperature | | -40 deg. C to 70 deg. C | | -40 deg. C to 85 deg. C -40 deg C to 70 deg C for 24VDC only |
| | Ambient operating humidity | | 5 to 85 %RH | | <-- |
| | Weight | | Approx. 2.7g | | Approx. 2 g |
| Approved standards | | UL/CSA | | UL/CSA | |
| Dimensions |  <p>Outline(Max.): 16 x 10 x 8mm</p> | |  <p>Outline(Max.): 16 x 10 x 8.4mm</p> | |  <p>Outline(Max.): 16 x 10 x 8mm</p> |
| |  <p>Outline(Max.): 15 x 7.5 x 9.4mm</p> | | | | |
| Terminal arrangement /Internal connections | <p>Bottom View</p>  <p>Coil polarity reversed</p> | | <p>Bottom View</p>  | | <p>Bottom View</p>  |
| | | | | | |

[Characteristics / Operation ratings]

| Model | | Product discontinuation | | Recommended replacement | |
|--|---|--|--|--|-------------------------------|
| | | G6EK-134PL-1-US DC12V | G6EK-134PL-ST-US DC3,5,6,12,24V | G6SK-2 DC3,5,6,12,24V | |
| Contact form | | SPDT(1C) | | DPDT(2C) | |
| Contact type | | Bifurcated crossbar | | <-- | |
| Contact material | | Au-Alloy+Ag | | <-- | |
| Rating | Rated load | Resistive load | 0.4A at 125VAC 100K ops. 2A at 30VDC 500K ops. 3A at 30VDC 200K ops. | 0.5A at 125VAC 100K ops. 2A at 30VDC 100K ops. | |
| | | Inductive load (cos φ=0.4) (L/R=7ms) | 0.2A at 125VAC 100K ops. 1A at 30VDC 500K ops. | - | |
| | Rated carry current | 3A | | 2A | |
| | Max. switching voltage | 250VAC, 220VDC | | <-- | |
| | Max. switching current | 3A | | 2A | |
| | Coil rating :power consumption | 3 to 24VDC : Approx. 400 mW | | 3 to 12VDC : Approx. 200 mW, 24VDC : Approx. 300 mW | |
| Characteristics | Contact Resistance | 50 mΩ max. | | 75 mΩ max. | |
| | Operating(Set) time | 5 ms max. | | 4 ms max. | |
| | Released(Reset) time | 5 ms max. | | 4 ms max. | |
| | Min. set pulse width | 15ms | | 10ms | |
| | Min. reset pulse width | 15ms | | 10ms | |
| | Insulation Resistance | 1,000 MΩ min. | | <-- | |
| | Withstand Voltage | Between coil and contact | 1,500 VAC 50/60Hz 1min | | 1,000 VAC 50/60Hz 1min |
| | | Between contacts of the same polarity | 1,000 VAC 50/60Hz 1min | | <-- |
| | | Between set and reset coil | - | | 500 VAC 50/60Hz 1min |
| | Impulse withstand voltage | Between coil and contact | 2,500 VAC 10 x 160 μs | | 1,500 VAC 10 x 160 μs |
| | Vibration | Durability | 10 to 55 to 10 Hz 2.5 mm single amplitude (5 mm double amplitude) | | <-- |
| | | Malfunction | 10 to 55 to 10 Hz, 1.65 mm single amplitude (3.3 mm double amplitude) | | <-- |
| | Shock resistance | Durability | 1,000m/s ² | | <-- |
| | | Malfunction | 300m/s ² | | 750m/s ² |
| | Durability | Mechanical | 100,000,000 operations min. | | <-- |
| | | Electrical | AC: 100,000 operations min. / DC: 500,000 operations min. (2A), 200,000 operations min (3A) | | AC/DC 100,000 operations min. |
| | Failure rate P level (Reference) | 10 μA at 10 m VDC | | <-- | |
| | Ambient operating temperature | -40 deg. C to 70 deg. C | | -40 deg. C to 85 deg. C -40 deg C to 70 deg C for 24VDC only | |
| | Ambient operating humidity | 5 to 85 %RH | | <-- | |
| | Weight | Approx. 2.7.g | | Approx. 2 g | |
| Approved standards | UL/CSA | | UL/CSA | | |
| Dimensions |  <p>Outline(Max.): 16 x 10 x 8mm</p> | |  <p>Outline(Max.): 16 x 10 x 8.4mm</p> |  <p>Outline(Max.): 15 x 7.5 x 9.4mm</p> | |
| Terminal arrangement /Internal connections |  <p>Coil polarity reversed</p> | |  |  | |

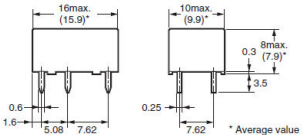



[Characteristics / Operation ratings]

| Model | | Product discontinuation | | Recommended replacement |
|--|---------------------------------------|--|--|---|
| | | G6EU-134P-ST-US 12 VDC | G6EU-134P-US-U 3.5,12 VDC | |
| Contact form | | SPDT(1C) | | DPDT(2C) |
| Contact type | | Bifurcated crossbar | | <— |
| Contact material | | Au-Alloy+Ag | | <— |
| Rating | Rated load | Resistive load | 0.4A at 125VAC 100K ops. 2A at 30VDC 500K ops. 3A at 30VDC 200K ops. | 0.5A at 125VAC 100K ops. 2A at 30VDC 100K ops. |
| | | Inductive load (cos φ=0.4) (L/R=7ms) | 0.2A at 125VAC 100K ops. 1A at 30VDC 500K ops. | — |
| | Rated carry current | 3A | | 2A |
| | Max. switching voltage | 250VAC, 220VDC | | <— |
| | Max. switching current | 3A | | 2A |
| | Coil rating :power consumption | 3 to 12 VDC : Approx. 200 mW | | 3 to 12VDC :Approx. 100 mW |
| | Contact Resistance | | 50 m Ω max. | |
| Operating(Set) time | | 5 ms max. | | 4 ms max. |
| Released(Reset) time | | 5 ms max. | | 4 ms max. |
| Min. set pulse width | | 15ms | | 10ms |
| Min. reset pulse width | | 15ms | | 10ms |
| Insulation Resistance | | 1,000 M Ω min. | | <— |
| Withstand Voltage | Between coil and contact | 1,500 VAC 50/60Hz 1min | | 2,000 VAC 50/60Hz 1min |
| | Between contacts of the same polarity | 1,000 VAC 50/60Hz 1min | | <— |
| Impulse withstand voltage | Between coil and contact | 2,500 VAC 10 x 160 μ s | | 1,500 VAC 10 x 160 μ s |
| Vibration | Durability | 10 to 55 to 10 Hz 2.5 mm single amplitude (5 mm double amplitude) | | <— |
| | Malfunction | 10 to 55 to 10 Hz, 1.65 mm single amplitude (3.3 mm double amplitude) | | <— |
| Shock resistance | Durability | 1,000m/s ² | | <— |
| | Malfunction | 300m/s ² | | 750m/s ² |
| Durability | Mechanical | 100,000,000 operations min. | | <— |
| | Electrical | AC: 100,000 operations min. / DC: 500,000 operations min. (2A), 200,000 operations min (3A) | | AC/DC 100,000 operations min. |
| Failure rate P level (Reference) | | 10 μ A at 10 m VDC | | <— |
| Ambient operating temperature | | -40 deg. C to 70 deg. C | | -40 deg. C to 85 deg. C |
| Ambient operating humidity | | 5 to 85 %RH | | <— |
| Weight | | Approx. 2.7g | | Approx. 2 g |
| Approved standards | | UL/CSA | | UL/CSA |
| Dimensions | | | | |
| Terminal arrangement /Internal connections | <p>Bottom View</p> | | <p>Bottom View</p> | |

[Characteristics / Operation ratings]

| Model | | Product discontinuation | | Recommended replacement |
|--|--------------------------------|--|--|---|
| | | G6E-134P-US 3,5,6,9,12,24,48VDC | G6E-194P-US 5,12,24VDC | G6S-2 DC3,5,6,9,12,24,48VDC |
| Contact form | | SPDT(1C) | | DPDT(2C) |
| Contact type | | Bifurcated crossbar | | <— |
| Contact material | | Au-Alloy+Ag | Au-Alloy+AgNi | Au-Alloy+Ag |
| Rating | Rated load | Resistive load | 0.4A at 125VAC 100K ops. 2A at 30VDC 500K ops. 3A at 30VDC 200K ops. | 0.2A at 250VAC 100K ops. 2A at 30VDC 500K ops. |
| | | Inductive load (cos φ=0.4) (L/R=7ms) | 0.2A at 125VAC 100K ops. 1A at 30VDC 500K ops. | |
| | Rated carry current | 3A | | 2A |
| | Max. switching voltage | 250VAC, 220VDC | | <— |
| | Max. switching current | 3A | | 2A |
| | Coil rating :power consumption | 3 to 24VDC : Approx. 200 mW, 48VDC : Approx. 400 mW | | 3 to 12VDC :Approx. 140 mW, 24VDC : Approx. 200 mW 48VDC : Approx. 280 mW |
| | Contact Resistance | | 50 mΩ max. | |
| Operating(Set) time | | 5 ms max. | | 4 ms max. |
| Released(Reset) time | | 5 ms max. | | 4 ms max. |
| Min. set pulse width | | — | | — |
| Min. reset pulse width | | — | | — |
| Insulation Resistance | | 1,000 MΩ min. | | <— |
| Characteristics | Withstand Voltage | Between coil and contact | 1,500 VAC 50/60Hz 1min | 2,000 VAC 50/60Hz 1min |
| | | Between contacts of the same polarity | 1,000 VAC 50/60Hz 1min | <— |
| | Impulse withstand voltage | Between coil and contact | 2,500 VAC 10 x 160 μs | 1,500 VAC 10 x 160 μs |
| | Vibration | Durability | 10 to 55 to 10 Hz 2.5 mm single amplitude (5 mm double amplitude) | |
| Malfunction | | 10 to 55 to 10 Hz, 1.65 mm single amplitude (3.3 mm double amplitude) | | <— |
| Shock resistance | Durability | 1,000m/s ² | | <— |
| | Malfunction | 300m/s ² | | 750m/s ² |
| Durability | Mechanical | 100,000,000 operations min. | | <— |
| | Electrical | AC: 100,000 operations min. / DC: 500,000 operations min. (2A), 200,000 operations min (3A) for 134P only | | AC/DC 100,000 operations min. |
| Failure rate P level (Reference) | | 10 μA at 10 m VDC | | <— |
| Ambient operating temperature | | -40 deg. C to 70 deg. C | | -40 deg. C to 85 deg. C |
| Ambient operating humidity | | 5 to 85 %RH | | <— |
| Weight | | Approx. 2.7.g | | Approx. 2 g |
| Approved standards | | UL/CSA | | UL/CSA |
| Dimensions | | <p>Outline(Max.): 16 x 10 x 8mm</p> | | <p>Outline(Max.): 15 x 7.5 x 9.4mm</p> |
| Terminal arrangement /Internal connections | | <p>Bottom View</p> | | <p>Bottom View</p> |

[Characteristics / Operation ratings]

| Model | | Product discontinuation | | Recommended replacement | |
|--|---------------------------------------|---|--|--|------------|
| | | G6EU-134P-US 3,5,6,9,12,24 VDC | G6EU-134PL-US 12,24 VDC | G6SU-2 3,5,6,9,12,24 VDC | |
| Contact form | | SPDT(1C) | | DPDT(2C) | |
| Contact type | | Bifurcated crossbar | | <-- | |
| Contact material | | Au-Alloy+Ag | | <-- | |
| Rating | Rated load | Resistive load | 0.4A at 125VAC 100K ops. 2A at 30VDC 500K ops. 3A at 30VDC 200K ops. | 0.5A at 125VAC 100K ops. 2A at 30VDC 100K ops. | |
| | | Inductive load (cos φ =0.4) (L/R=7ms) | 0.2A at 125VAC 100K ops. 1A at 30VDC 500K ops. | - | |
| | Rated carry current | 3A | | 2A | |
| | Max. switching voltage | 250VAC, 220VDC | | <-- | |
| | Max. switching current | 3A | | 2A | |
| | Coil rating :power consumption | 3 to 24 VDC : Approx. 200 mW | | 3 to 12VDC :Approx. 100 mW, 24VDC Approx. 150mW | |
| | Contact Resistance | | 50 mΩ max. | | 75 mΩ max. |
| Operating(Set) time | | 5 ms max. | | 4 ms max. | |
| Released(Reset) time | | 5 ms max. | | 4 ms max. | |
| Min. set pulse width | | 15ms | | 10ms | |
| Min. reset pulse width | | 15ms | | 10ms | |
| Insulation Resistance | | 1,000 MΩ min. | | <-- | |
| Withstand Voltage | Between coil and con | 1,500 VAC 50/60Hz 1min | | 2,000 VAC 50/60Hz 1min | |
| | Between contacts of the same polarity | 1,000 VAC 50/60Hz 1min | | <-- | |
| Impulse withstand volt | Between coil and con | 2,500 VAC 10 x 160 μs | | 1,500 VAC 10 x 160 μs | |
| Vibration | Durability | 10 to 55 to 10 Hz 2.5 mm single amplitude (5 mm double amplitude) | | <-- | |
| | Malfunction | 10 to 55 to 10 Hz, 1.65 mm single amplitude (3.3 mm double amplitude) | | <-- | |
| Shock resistance | Durability | 1,000m/s ² | | <-- | |
| | Malfunction | 300m/s ² | | 750m/s ² | |
| Durability | Mechanical | 100,000,000 operations min. | | <-- | |
| | Electrical | AC: 100,000 operations min. / DC: 500,000 operations min. (2A), 200,000 operations min (3A) | | AC/DC 100,000 operations min. | |
| Failure rate P level (Reference) | | 10 μA at 10 m VDC | | <-- | |
| Ambient operating temperature | | -40 deg. C to 70 deg. C | | -40 deg. C to 85 deg. C | |
| Ambient operating humidity | | 5 to 85 %RH | | <-- | |
| Weight | | Approx. 2.7g | | Approx. 2 g | |
| Approved standards | | UL/CSA | | UL/CSA | |
| Dimensions | |  <p>Outline(Max.): 16 x 10 x 8mm</p> | |  <p>Outline(Max.): 15 x 7.5 x 9.4mm</p> | |
| Terminal arrangement /Internal connections | | <p>Bottom View</p>  | | <p>Bottom View</p>  | |

[Characteristics / Operation ratings]

| Model | | Product discontinuation | | Recommended replacement |
|--|---------------------------------------|--|--|---|
| | | G6EK-134P-US 3,5,6,9,12,24VDC | G6EK-134PL-US 5,6,12,24VDC | G6SK-2 3,5,6,9,12,24VDC |
| Contact form | | SPDT(1C) | | DPDT(2C) |
| Contact type | | Bifurcated crossbar | | <-- |
| Contact material | | Au-Alloy + Ag | | <-- |
| Rating | Rated load | Resistive load | 0.4A at 125VAC 100K ops. 2A at 30VDC 500K ops. 3A at 30VDC 200K ops. | 0.5A at 125VAC 100K ops. 2A at 30VDC 100K ops. |
| | | Inductive load (cos φ=0.4) (L/R=7ms) | 0.2A at 125VAC 100K ops. 1A at 30VDC 500K ops. | - |
| | Rated carry current | 3A | | 2A |
| | Max. switching voltage | 250VAC, 220VDC | | <-- |
| | Max. switching current | 3A | | 2A |
| | Coil rating :power consumption | 3 to 24VDC:Approx. 200 mW(134P), 5 to 24VDC:Approx. 400 mW(134PL) | | 3 to 12VDC :Approx. 200 mW, 24VDC : Approx. 300 mW |
| | Insulation Resistance | | 1,000 MΩ min. | |
| Withstand Voltage | Between coil and contact | 1,500 VAC 50/60Hz 1min | | 1,000 VAC 50/60Hz 1min |
| | Between contacts of the same polarity | 1,000 VAC 50/60Hz 1min | | <-- |
| | Between set and reset coil | - | | 500 VAC 50/60Hz 1min |
| Impulse withstand voltage | Between coil and contact | 2,500 VAC x 160 μs | | 1,500 VAC 10 x 160 μs |
| Vibration | Durability | 10 to 55 to 10 Hz 2.5 mm single amplitude (5 mm double amplitude) | | <-- |
| | Malfunction | 10 to 55 to 10 Hz, 1.65 mm single amplitude (3.3 mm double amplitude) | | <-- |
| Shock resistance | Durability | 1,000m/s ² | | <-- |
| | Malfunction | 300m/s ² | | 750m/s ² |
| Durability | Mechanical | 100,000,000 operations min. | | <-- |
| | Electrical | AC: 100,000 operations min. / DC: 500,000 operations min. (2A), 200,000 operations min (3A) | | AC/DC 100,000 operations min. |
| Failure rate P level (Reference) | | 10 μA at 10 m VDC | | <-- |
| Ambient operating temperature | | -40 deg. C to 70 deg. C | | -40 deg. C to 85 deg. C -40 deg C to 70 deg C for 24VDC only |
| Ambient operating humidity | | 5 to 85 %RH | | <-- |
| Weight | | Approx. 2.7.g | | Approx. 2 g |
| Approved standards | | UL/CSA | | UL/CSA |
| Dimensions | | <p>Outline(Max.): 16 x 10 x 8mm</p> | | <p>Outline(Max.): 15 x 7.5 x 9.4mm</p> |
| Terminal arrangement /Internal connections | | <p>Bottom View</p> | | <p>Bottom View</p> |

[Operation methods]**There is no change in the operation method.**

Specifications and prices in this product news are as of the issue date and are subject to change without notice.
Only main changes in specifications are described in this document. Please be sure to read the relevant catalogs, datasheets, product specifications, instructions, and manuals for precautions and necessary information when using products.

Before change

| Old part number | Old OC product code | Old ODPOS code |
|----------------------|---------------------|------------------|
| G6E-134P-ST-US DC12 | G6E 1060H | G6E134PSTUS12DC |
| G6E-134P-ST-US DC24 | G6E 1059D | G6E134PSTUS24DC |
| G6E-134P-ST-US DC3 | G6E 1195G | G6E134PSTUS3DC |
| G6E-134P-ST-US DC48 | G6E 1067E | G6E134PSTUS48DC |
| G6E-134P-ST-US DC5 | G6E 1056M | G6E134PSTUS5DC |
| G6E-134P-ST-US DC6 | G6E 1058F | G6E134PSTUS6DC |
| G6E-134P-ST-US DC9 | G6E 1061F | G6E134PSTUS9DC |
| G6E-134P-US DC12 | G6E 1012H | G6E134PUS12DC |
| G6E-134P-US DC24 | G6E 1010A | G6E134PUS24DC |
| G6E-134P-US DC3 | G6E 1098E | G6E134PUS3DC |
| G6E-134P-US DC48 | G6E 1079R | G6E134PUS48DC |
| G6E-134P-US DC5 | G6E 1011M | G6E134PUS5DC |
| G6E-134P-US DC6 | G6E 1016M | G6E134PUS6DC |
| G6E-134P-US DC9 | G6E 1017R | G6E134PUS9DC |
| G6E-134P-US-U DC12 | G6E 1140M | #NV |
| G6E-134P-US-U DC24 | G6E 1141H | #NV |
| G6E-134P-US-U DC48 | G6E 1142F | #NV |
| G6E-134P-US-U DC5 | G6E 1137M | #NV |
| G6E-134P-US-U DC6 | G6E 1138H | #NV |
| G6E-134P-US-U DC9 | G6E 1139F | #NV |
| G6E-134PL-ST-US DC12 | G6E 1214G | G6E134PLSTUS12DC |
| G6E-134PL-ST-US DC24 | G6E 1216C | G6E134PLSTUS24DC |
| G6E-134PL-ST-US DC5 | G6E 1215E | G6E134PLSTUS5DC |
| G6E-134PL-ST-US DC9 | G6E 1217A | G6E134PLSTUS9DC |
| G6E-134PL-US DC12 | G6E 1202C | G6E134PLUS12DC |
| G6E-134PL-US DC24 | G6E 1203A | G6E134PLUS24DC |
| G6E-134PL-US DC48 | G6E 1204M | #NV |
| G6E-134PL-US DC5 | G6E 1205H | #NV |
| G6E-134PL-US DC6 | G6E 1207D | #NV |
| G6E-134PL-US DC9 | G6E 1210D | #NV |
| G6E-134PL-US-U DC12 | G6E 1212M | #NV |
| G6E-134PL-US-U DC24 | G6E 1213R | #NV |
| G6E-134PL-US-U DC48 | G6E 1359C | #NV |
| G6E-134PL-US-U DC5 | G6E 1208B | #NV |
| G6E-194P-US DC12 | G6E 1237F | #NV |
| G6E-194P-US DC24 | G6E 1258R | #NV |
| G6E-194P-US DC5 | G6E 1385B | #NV |
| G6EK-134P-1-US DC12 | G6EK1320G | G6EK134P1US12DC |
| G6EK-134P-1-US DC24 | G6EK1365G | #NV |
| G6EK-134P-1-US DC5 | G6EK1321E | #NV |
| G6EK-134P-1-US DC9 | G6EK1354A | #NV |
| G6EK-134P-ST-US DC12 | G6EK1078M | G6EK134PSTUS12DC |
| G6EK-134P-ST-US DC24 | G6EK1079H | G6EK134PSTUS24DC |
| G6EK-134P-ST-US DC3 | G6EK1312F | G6EK134PSTUS3DC |
| G6EK-134P-ST-US DC5 | G6EK1040B | G6EK134PSTUS5DC |

| | | |
|-----------------------|-----------|-------------------|
| G6EK-134P-ST-US DC6 | G6EK1076C | #NV |
| G6EK-134P-ST-US DC9 | G6EK1077A | G6EK134PSTUS9DC |
| G6EK-134P-US DC12 | G6EK1108E | G6EK134PUS12DC |
| G6EK-134P-US DC24 | G6EK1109C | G6EK134PUS24DC |
| G6EK-134P-US DC3 | G6EK1210C | G6EK134PUS3DC |
| G6EK-134P-US DC5 | G6EK1105M | G6EK134PUS5DC |
| G6EK-134P-US DC6 | G6EK1106R | #NV |
| G6EK-134P-US DC9 | G6EK1107G | #NV |
| G6EK-134P-US-U DC12 | G6EK1258H | #NV |
| G6EK-134P-US-U DC24 | G6EK1259F | #NV |
| G6EK-134P-US-U DC3 | G6EK1381R | #NV |
| G6EK-134P-US-U DC5 | G6EK1255C | #NV |
| G6EK-134PL-1-US DC12 | G6EK1382G | #NV |
| G6EK-134PL-ST-US DC12 | G6EK1346M | #NV |
| G6EK-134PL-ST-US DC24 | G6EK1351G | G6EK134PLSTUS24DC |
| G6EK-134PL-ST-US DC5 | G6EK1344D | G6EK134PLSTUS5DC |
| G6EK-134PL-US DC12 | G6EK1327D | #NV |
| G6EK-134PL-US DC24 | G6EK1328B | G6EK134PLUS24DC |
| G6EK-134PL-US DC5 | G6EK1324M | #NV |
| G6EK-134PL-US DC6 | G6EK1325H | #NV |
| G6EU-134P-ST-US DC12 | G6EK1069M | #NV |
| G6EU-134P-US DC12 | G6EK1098D | G6EU134PUS12DC |
| G6EU-134P-US DC24 | G6EK1099B | G6EU134PUS24DC |
| G6EU-134P-US DC3 | G6EK1213H | #NV |
| G6EU-134P-US DC5 | G6EK1095M | G6EU134PUS5DC |
| G6EU-134P-US DC6 | G6EK1096H | #NV |
| G6EU-134P-US DC9 | G6EK1097F | G6EU134PUS9DC |
| G6EU-134P-US-U DC12 | G6EK1238C | #NV |
| G6EU-134P-US-U DC3 | G6EK1371A | #NV |
| G6EU-134P-US-U DC5 | G6EK1235R | #NV |
| G6EU-134PL-US DC12 | G6EK1337A | #NV |
| G6EU-134PL-US DC24 | G6EK1338M | #NV |

After change*

| New part number | New OC product code | New ODPOS code |
|-----------------|---------------------|----------------|
| G6S-2 DC12 | G6S 6003E | G6S212DC |
| G6S-2 DC24 | G6S 6004C | G6S224DC |
| G6S-2 DC3 | G6S 6000M | G6S23DC |
| G6S-2 DC48 | G6S 6005A | G6S248DC |
| G6S-2 DC5 | G6S 6002G | G6S25DC |
| G6S-2 DC6 | G6S 6033G | G6S26DC |
| G6S-2 DC9 | G6S 6034E | G6S29DC |
| G6S-2 DC12 | G6S 6003E | G6S212DC |
| G6S-2 DC24 | G6S 6004C | G6S224DC |
| G6S-2 DC3 | G6S 6000M | G6S23DC |
| G6S-2 DC48 | G6S 6005A | G6S248DC |
| G6S-2 DC5 | G6S 6002G | G6S25DC |
| G6S-2 DC6 | G6S 6033G | G6S26DC |
| G6S-2 DC9 | G6S 6034E | G6S29DC |
| G6S-2 DC12 | G6S 6003E | G6S212DC |
| G6S-2 DC24 | G6S 6004C | G6S224DC |
| G6S-2 DC48 | G6S 6005A | G6S248DC |
| G6S-2 DC5 | G6S 6002G | G6S25DC |
| G6S-2 DC6 | G6S 6033G | G6S26DC |
| G6S-2 DC9 | G6S 6034E | G6S29DC |
| G6S-2 DC12 | G6S 6003E | G6S212DC |
| G6S-2 DC24 | G6S 6004C | G6S224DC |
| G6S-2 DC5 | G6S 6002G | G6S25DC |
| G6S-2 DC9 | G6S 6034E | G6S29DC |
| G6S-2 DC12 | G6S 6003E | G6S212DC |
| G6S-2 DC24 | G6S 6004C | G6S224DC |
| G6S-2 DC5 | G6S 6002G | G6S25DC |
| G6S-2 DC9 | G6S 6034E | G6S29DC |
| G6S-2 DC12 | G6S 6003E | G6S212DC |
| G6S-2 DC24 | G6S 6004C | G6S224DC |
| G6S-2 DC48 | G6S 6005A | G6S248DC |
| G6S-2 DC5 | G6S 6002G | G6S25DC |
| G6S-2 DC6 | G6S 6033G | G6S26DC |
| G6S-2 DC9 | G6S 6034E | G6S29DC |
| G6S-2 DC12 | G6S 6003E | G6S212DC |
| G6S-2 DC24 | G6S 6004C | G6S224DC |
| G6S-2 DC5 | G6S 6002G | G6S25DC |
| G6S-2 DC12 | G6S 6003E | G6S212DC |
| G6S-2 DC24 | G6S 6004C | G6S224DC |
| G6S-2 DC5 | G6S 6002G | G6S25DC |
| G6SK-2 DC12 | G6S 6154F | G6SK212DC |
| G6SK-2 DC24 | G6S 6155D | G6SK224DC |
| G6SK-2 DC5 | G6S 6153H | G6SK25DC |
| G6SK-2 DC9 | G6S 6175R | G6SK29DC |
| G6SK-2 DC12 | G6S 6154F | G6SK212DC |
| G6SK-2 DC24 | G6S 6155D | G6SK224DC |
| G6SK-2 DC3 | G6S 6173B | G6SK23DC |
| G6SK-2 DC5 | G6S 6153H | G6SK25DC |

| | | |
|-------------|-----------|-----------|
| G6SK-2 DC6 | G6S 6174M | G6SK26DC |
| G6SK-2 DC9 | G6S 6175R | G6SK29DC |
| G6SK-2 DC12 | G6S 6154F | G6SK212DC |
| G6SK-2 DC24 | G6S 6155D | G6SK224DC |
| G6SK-2 DC3 | G6S 6173B | G6SK23DC |
| G6SK-2 DC5 | G6S 6153H | G6SK25DC |
| G6SK-2 DC6 | G6S 6174M | G6SK26DC |
| G6SK-2 DC9 | G6S 6175R | G6SK29DC |
| G6SK-2 DC12 | G6S 6154F | G6SK212DC |
| G6SK-2 DC24 | G6S 6155D | G6SK224DC |
| G6SK-2 DC3 | G6S 6173B | G6SK23DC |
| G6SK-2 DC5 | G6S 6153H | G6SK25DC |
| G6SK-2 DC12 | G6S 6154F | G6SK212DC |
| G6SK-2 DC12 | G6S 6154F | G6SK212DC |
| G6SK-2 DC24 | G6S 6155D | G6SK224DC |
| G6SK-2 DC5 | G6S 6153H | G6SK25DC |
| G6SK-2 DC12 | G6S 6154F | G6SK212DC |
| G6SK-2 DC24 | G6S 6155D | G6SK224DC |
| G6SK-2 DC5 | G6S 6153H | G6SK25DC |
| G6SK-2 DC6 | G6S 6174M | G6SK26DC |
| G6SU-2 DC12 | G6S 6158R | G6SU212DC |
| G6SU-2 DC12 | G6S 6158R | G6SU212DC |
| G6SU-2 DC24 | G6S 6159G | G6SU224DC |
| G6SU-2 DC3 | G6S 6170H | G6SU23DC |
| G6SU-2 DC5 | G6S 6157M | G6SU25DC |
| G6SU-2 DC6 | G6S 6171F | G6SU26DC |
| G6SU-2 DC9 | G6S 6172D | G6SU29DC |
| G6SU-2 DC12 | G6S 6158R | G6SU212DC |
| G6SU-2 DC3 | G6S 6170H | G6SU23DC |
| G6SU-2 DC5 | G6S 6157M | G6SU25DC |
| G6SU-2 DC12 | G6S 6158R | G6SU212DC |
| G6SU-2 DC24 | G6S 6159G | G6SU224DC |

*If After the change values are the same, it means the product only had technical or packing change, which does not effect the product codes!

Changes are highlighted with a background colour,

Before change

| Old part number | Old OC product code | Old ODPOS code |
|-----------------------|---------------------|------------------|
| G6E-134C-US DC12 | G6E 1039M | G6E134CUS12DC |
| G6E-134C-US DC24 | G6E 1040C | #NV |
| G6E-134C-US DC5 | G6E 1036E | #NV |
| G6E-134P-US-RD DC24 | G6E 1271F | #NV |
| G6E-134PL-ST-US DC3 | G6E 1386M | #NV |
| G6E-134PL-US DC3 | G6E 1219H | #NV |
| G6EK-134P-ST-US DC1.5 | G6EK1392D | G6EK134PSTUSDC15 |
| G6EK-134PL-ST-US DC3 | G6EK1367C | #NV |
| G6EK-134PL-ST-US DC6 | G6EK1345B | #NV |

After change*

| New part number | New OC product code | New ODPOS code |
|-------------------|---------------------|-------------------|
| G6S-2 DC12 | G6S 6003E | G6S212DC |
| G6S-2 DC24 | G6S 6004C | G6S224DC |
| G6S-2 DC5 | G6S 6002G | G6S25DC |
| No recommendation | No recommendation | No recommendation |
| G6S-2 DC3 | G6S 6000M | G6S23DC |
| G6S-2 DC3 | G6S 6000M | G6S23DC |
| No recommendation | No recommendation | No recommendation |
| G6SK-2 DC3 | G6S 6173B | G6SK23DC |
| G6SK-2 DC6 | G6S 6174M | G6SK26DC |

*If After the change values are the same, it means the product only had technical or packing change, which does not effect the product codes!

Changes are highlighted with a background colour,