

IHM Series

Aerospace Proximity Sensors

32318768

Issue 1

Datasheet



DESCRIPTION

Honeywell has over 30 years' experience designing and delivering accurate and reliable proximity sensors that are currently used in a variety of military and commercial aircraft. Honeywell's patented IHM Series Aerospace Proximity Sensors are configurable, non-contact, hermetically sealed devices designed to sense the presence or absence of a target in harsh-duty aircraft applications. The IHM Series provides on/ off output, and can be configured with an optional health monitoring output to the host system. The technology Honeywell uses in the IHM Series is considered an improvement on traditional ECKO (Eddy Current Killed Oscillator) topology that previously had been the standard in aerospace applications. The IHM Series helps to reduce downtime and maintenance costs due to a unique circuit that can detect any internal failures and display a fault output instead of a false positive or false negative.

VALUE TO CUSTOMERS

- Enhanced vibration and EMI specifications help to increase revenue (flight hours) and reduce cost to serve (system maintenance)
- Hermetic sealing helps increase revenue (flight hours), reduce cost to serve (maintenance), & reduce cost of goods (spares)
- Platform approach helps to increase revenue (speed to market) and reduce cost to serve (lower engineering investment)
- Health monitoring helps to increase revenue (flight hours), reduce cost to serve (maintenance), and reduce cost of goods (spares)
- Supplier stability helps to reduce cost to serve (troubleshoot with original supplier)
- Current install base helps to reduce cost to serve (proven performance and MTBF)

FEATURES

- Industry-leading indirect lightning and dielectric ruggedness: Meets the increased requirements of today's composite aircraft and most challenging applications including landing gear, thrust reversers, and flight controls
- Superior vibration ruggedness: Capable of withstanding extremely high vibration applications
- Environmentally rugged: Fully hermetic packages provide long-term reliability in very harsh environments by eliminating the potential for contamination of the sensor from the application environment. In addition, Honeywell has developed an innovative method to hermetically seal wirelead (pigtail) configurations
- Integral Health Monitoring Capability: Optional third output state to indicate the health of the sensor (whether it is healthy or failed). Reduces maintenance time, reduces delayed flights, and lowers overall maintenance cost across the life of the aircraft
- Non-contact design: Utilizes non-contact technology to sense the presence or absence of a target regardless of the dirty, harsh environment in which it is placed, eliminating mechanical failure mechanisms, reducing wear, minimizing downtime, increasing durability, and increasing reliability

POTENTIAL APPLICATIONS

- Thrust reverser actuation system (TRAS) (stowed or deployed status)
- Doors (open/closed position, locked status)
- Cargo loading latch detection (palet locked)
- Evacuation slide door-lock mechanism
- Flight controls (flap/slat, spoilers)
- Landing gear (uplock, downlock, & Weight On Wheels (WOW))

DIFFERENTIATION

- Diagnostic capability: Integral Health Monitoring: sinks 9 mA ±1 mA or <1 mA on fault detection
- Honeywell has developed an innovative method to hermetically seal wire-lead (pigtail) configurations
- Fire detection/integrity: Explosion proof RTCA/DO-160G Section 9, Cat E&H
- Operational shock: RTCA/DO-160G Section 7, Cat B
- Crash safety: RTCA/DO-160G Section 7, Cat B
- Radio frequency emission: RTCA/DO-160G Section 21, Cat M
- Lightning induced transient susceptibility: RTCA/DO-160G Section 22, Cat B3K3L3

PORTFOLIO

Honeywell's IHM Series is part of a comprehensive line of aerospace sensors, switches, and value-added solutions. To view Honeywell's complete product offering, click here.

Table 1. Performance Specifications

| Characteristic | Parameter | | |
|--|---|---|--|
| Mechanical Characteristics | | | |
| Weight | 60 g to 150 g | | |
| Sealing | Hermetically sealed | | |
| Connector/leads | D38999/25YA98PN D38999/25YA98PA EN2997Y10803MN M83723/90Y1005N M83723/90Y10056 M83723/90Y10057 M83723/90Y10058 Pigtail | | |
| Form factor | Inline, cylindrical, threaded Right angle, cylindrical, threaded Inline, cylindrical, flanged Right angle, cylindrical, flanged | | |
| Sensing distance | 5 mm max. | | |
| Sensing face | Inconel® | | |
| Outer body material | Stainless steel | | |
| Sensor head diameter | 13,5 mm [0.53 in] | | |
| Sensor length | various; 60 mm [2.36 in] max. | | |
| MTBF | >1,000,000 flight hours | | |
| Electrical Characteristics | | | |
| Supply voltage | 12 Vdc to 28 Vdc | | |
| Supply current | <10 mA | | |
| Operating temperature range | -55 °C to 115 °C [-67 °F to 239 °F] | | |
| Storage temperature range | -65 °C to 115 °C [-85 °F to 239 °F] | | |
| Output type | Current sinking output | Open collector output, Normally Closed | Open collector output, Normally Open |
| Target far | Output current: 12 mA to 16 mA | Switch closed Max. load current: 250 mA res. Output voltage drop: less than 2 V at 250 mA resisitve load current | Switch open Max. leakage current: 50 µA @ 28 Vdc |
| | | | Switch closed |
| Target near | Output current: 4 mA to 6 mA | Switch open Max. leakage current: 50 µA @ 28 Vdc | Max. load current: 250 mA res. Output voltage drop: less than 2 V at 250 mA resisitve load current |
| Target near Internal failure | Output current: 4 mA to 6 mA Output current: <1 mA or 9 mA to 11 mA | Max. leakage current: | Output voltage drop: less than 2 V |
| - | Output current: | Max. leakage current: 50 μA @ 28 Vdc | Output voltage drop: less than 2 V at 250 mA resisitve load current |
| Internal failure | Output current: <1 mA or 9 mA to 11 mA | Max. leakage current: 50 μA @ 28 Vdc | Output voltage drop: less than 2 V at 250 mA resisitve load current |
| Internal failure Target response time | Output current: <1 mA or 9 mA to 11 mA 5 ms | Max. leakage current: 50 μA @ 28 Vdc | Output voltage drop: less than 2 V at 250 mA resisitve load current |
| Internal failure Target response time Power on delay time | Output current: <1 mA or 9 mA to 11 mA 5 ms <1 second | Max. leakage current: 50 μA @ 28 Vdc | Output voltage drop: less than 2 V at 250 mA resisitve load current |
| Internal failure Target response time Power on delay time Bonding resistance | Output current: <1 mA or 9 mA to 11 mA 5 ms <1 second <2.5 mΩ | Max. leakage current: 50 μA @ 28 Vdc | Output voltage drop: less than 2 V at 250 mA resisitve load current |
| Internal failure Target response time Power on delay time Bonding resistance Dielectric strength | Output current: <1 mA or 9 mA to 11 mA 5 ms <1 second <2.5 mΩ 1500 Vdc and 1500 Vac | Max. leakage current: 50 μA @ 28 Vdc | Output voltage drop: less than 2 V at 250 mA resisitve load current |
| Internal failure Target response time Power on delay time Bonding resistance Dielectric strength Insulation resistance | Output current: <1 mA or 9 mA to 11 mA 5 ms <1 second <2.5 mΩ 1500 Vdc and 1500 Vac | Max. leakage current: 50 μA @ 28 Vdc | Output voltage drop: less than 2 V at 250 mA resisitve load current |
| Internal failure Target response time Power on delay time Bonding resistance Dielectric strength Insulation resistance Sensing Characteristics | $\begin{array}{c} & \\ & \\ & \\ & \\ & \\ & \\ & \\ & \\ & \\ & $ | Max. leakage current: 50 μA @ 28 Vdc n/a | Output voltage drop: less than 2 V at 250 mA resisitve load current |

| Characteristic | Parameter | |
|---|---|--|
| Environmental Characteristics | | |
| Temperature and altitude | RTCA/DO-160G – Section 4, Category D3 | |
| Temperature variation | RTCA/DO-160G – Section 5, Category S2 | |
| Humidity | RTCA/DO-160G – Section 6, Category C | |
| Operational shock and crash safety | RTCA/DO-160G – Section 7, Category B | |
| Vibration | RTCA/DO-160G – Section 8, Category R (Curve E & E1) | |
| Explosion safety | RTCA/DO-160G – Section 9, Category E&H ENV III | |
| Water proofness | RTCA/DO-160G – Section 10, Category R | |
| Fluid susceptibility | RTCA/DO-160G – Section 11, Category F | |
| Sand and dust | RTCA/DO-160G – Section 12, Category D | |
| Fungus resistance | RTCA/DO-160G – Section 13, Category F | |
| Salt spray | RTCA/DO-160G – Section 14, Category T | |
| Magnetic effects | RTCA/DO-160G – Section 15, Category A | |
| Power input | RTCA/DO-160G – Section 16, Category A | |
| Voltage spike | RTCA/DO-160G – Section 17, Category A | |
| Audio frequency conducted susceptibility | RTCA/DO-160G – Section 18, Category Z | |
| Induced signal susceptibility | RTCA/DO-160G – Section 19, Category CWE | |
| Radio frequency radiated susceptibility | RTCA/DO-160G – Section 20, Category G | |
| Radio frequency conducted susceptibility | RTCA/DO-160G – Section 20, Category Y | |
| Radio frequency emission | RTCA/DO-160G – Section 21, Category M | |
| Lightning induced transient susceptibility | RTCA/DO-160G – Section 22, Category B3K3L3 | |
| lcing | RTCA/DO-160G – Section 24, Category A | |
| Electrostatic discharge | RTCA/DO-160G – Section 25, Category A | |

Figure 1. Product Nomenclature

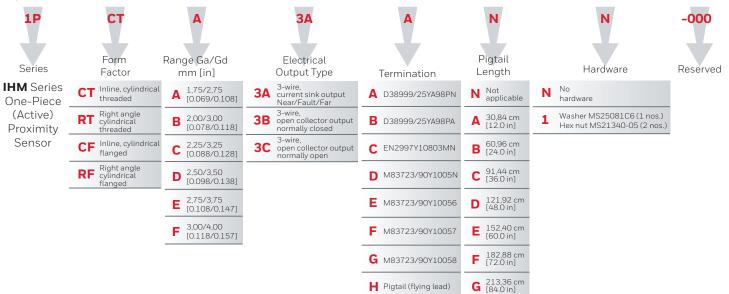



Figure 2. Slide-by Curves




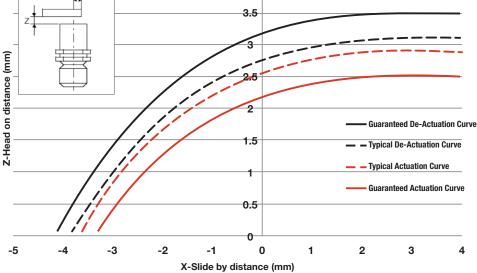


Figure 3. Keep Out Zone Map

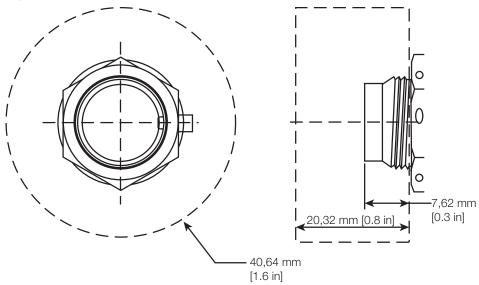

PRODUCT DIMENSIONS

Figure 4. IHM Series: Cylindrical, Flanged Housing with EN2997Y10803MN Connector mm [in]

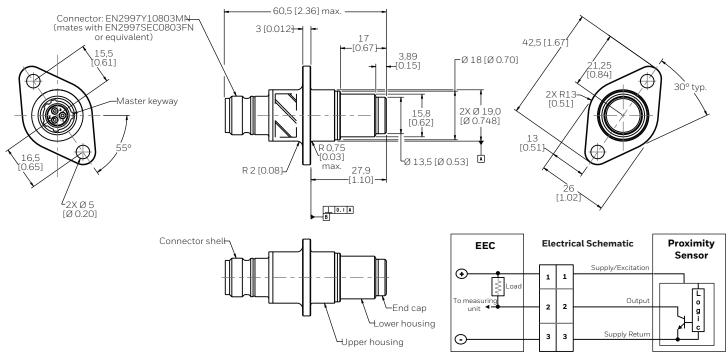
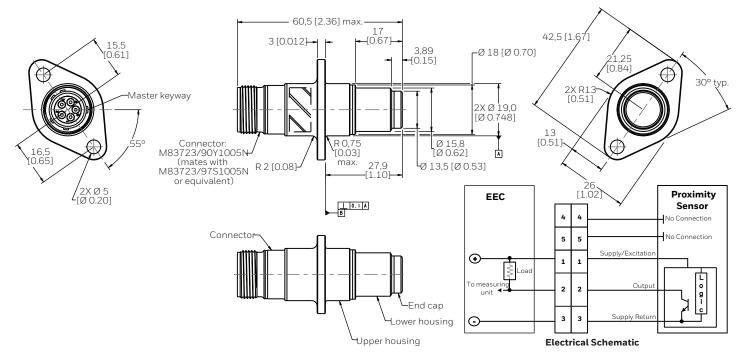


Figure 5. IHM Series: Cylindrical, Flanged Housing with M83723/90Y1005N Connector mm [in]



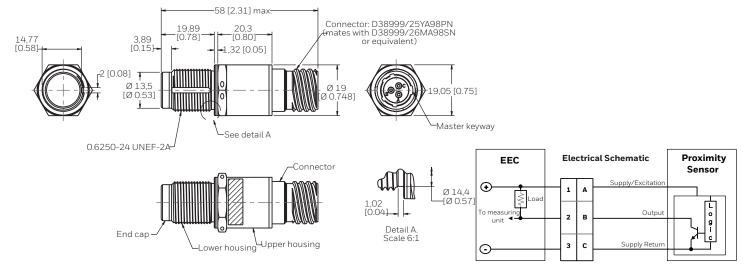


Figure 6. IHM Series: Cylindrical Housing with D38999/25YA98PN Connector mm [in]

Figure 7. IHM Series: Cylindrical Housing with Pigtail Connection mm [in]

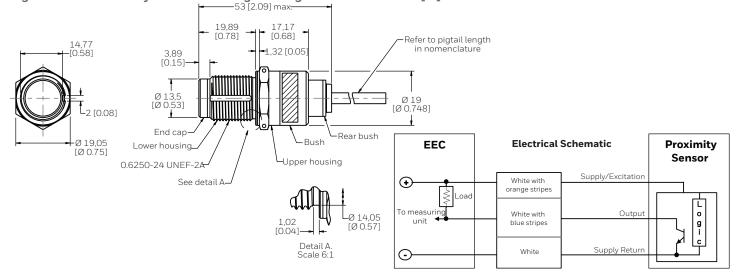


Figure 8. IHM Series: Right Angle, Flanged Housing with D38999/25YA98PN Connector mm [in]

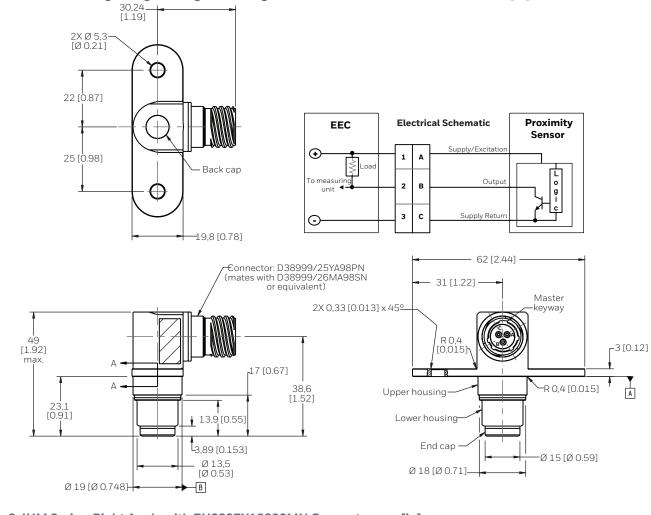
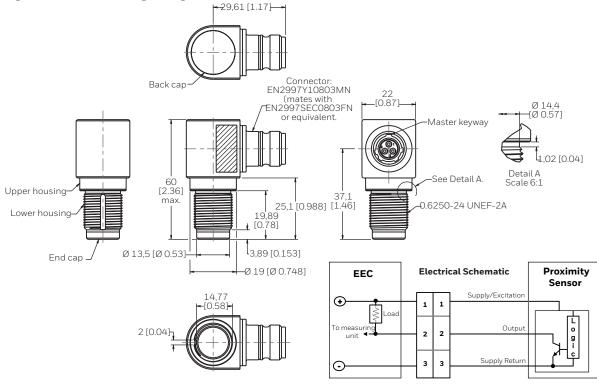


Figure 9. IHM Series: Right Angle with EN2997Y10803MN Connector mm [in]




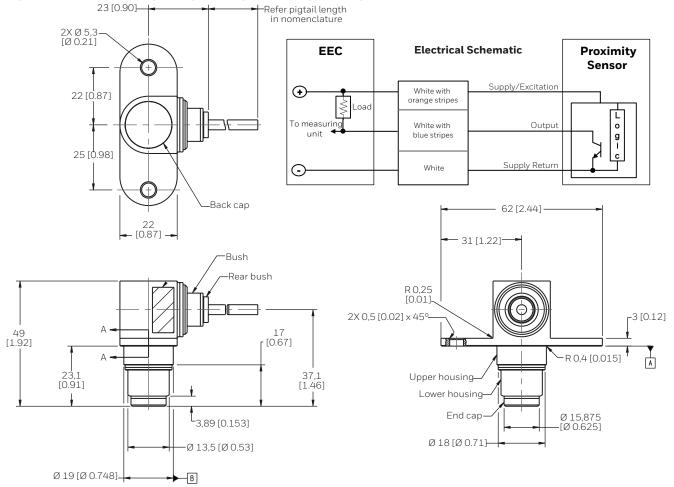


Figure 10. IHM Series: Right Angle, Flanged Housing with Pigtail Connection mm [in]

Figure 11. IHM Series: Right Angle with M83723/90Y1005N Connector mm [in]

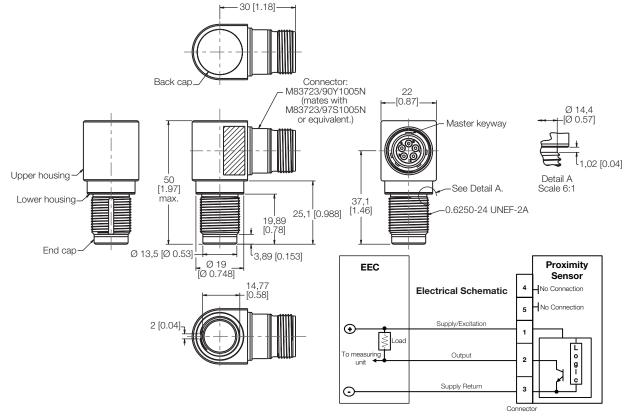

ADDITIONAL MATERIALS

The following associated literature is available on the Honeywell web site at sensing.honeywell.com:

- Product installation instructions
- Aerospace range guide
- Application note

Find out more

Honeywell serves its customers through a worldwide network of sales offices and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office. To learn more about Honeywell's sensing and switching products, call +1-815-235-6847 or 1-800-537-6945, visit sensing.honeywell.com, or e-mail inquiries to info.sc@honeywell.com

A WARNING PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

▲ WARNING MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

Warranty/Remedy

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship during the applicable warranty period. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgment or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items that Honeywell, in its sole discretion, finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While Honeywell may provide application assistance personally, through our literature and the Honeywell web site, it is buyer's sole responsibility to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this writing. However, Honeywell assumes no responsibility for its use.

Honeywell Sensing and Internet of Things

9680 Old Bailes Road Fort Mill, SC 29707 honeywell.com

Honeywell

32318768-1-EN IL50 GLO May 2017 © 2017 Honeywell International Inc. All rights reserved. ® Inconel is a registered trademark of Inco Alloys International, Inc.